



# IMPORTANT CUSTOMER INFORMATION

Bashlin has supplied quality equipment to Linemen since 1926. You may be able to find products for less, but you will not buy any other Lineman's Equipment that works or wears better than Bashlin's right priced quality products produced in our manufacturing facilities in Grove City, Pennsylvania.

Linework is dangerous. Properly using these products and appropriate training are keys to your safety. To aid in product understanding, as well as proper use of these items, the following information boxes and product application symbols are located with the product write-ups. Please read and understand this information, as well as the material included with and attached to product BEFORE using these items. If there are questions, please contact us via the various methods listed at the bottom of the page.



**FALL ARREST**

More than 2', but not more than 6' free fall. (Full body harness)



**POSITIONING**

Maximum 2' free fall. (Positioning belts, Line belts)



**RETRIEVAL**

For rescue from enclosed confined spaces. (Full body harness)



**NOT A SAFETY BELT**

Not to be considered personal protective equipment.

## MANUFACTURER'S WARRANTY

The Manufacturer warrants equipment manufactured by it to be free from defects in material and workmanship under normal use and service, its obligation under this warranty being limited to replacing at its factory any part or parts which shall, within 30 days after delivery of such equipment to the original purchaser, be returned to it and which its examination shall disclose to its satisfaction to have been thus defective; this warranty being expressly in lieu of all other warranties, expressed or implied, and all other obligations or liabilities on its part.

**THE INFORMATION IN THIS CATALOG IS TO THE BEST OF OUR KNOWLEDGE CORRECT AT THE TIME OF PRINTING. WE RESERVE THE RIGHT TO MAKE IMPROVEMENTS AND CHANGES AS NECESSARY TO OUR PRODUCTS WITHOUT NOTICE.**

**WARRANTED AND ALL OTHER REPAIR WORK MUST BE DONE BY BASHLIN FACTORY PERSONNEL USING BASHLIN COMPONENTS.**

## TERMS AND CONDITIONS

**Pricing** - Prices are subject to change without notice. The cost of Bashlin products is as low as is consistent with quality merchandise. We encourage comparison.

**Payment** - Open account terms are available once credit has been established. Bashlin accepts all major credit cards and cash advance orders. On cash advance orders, overpayment of less than \$2.00 cannot be refunded.

**Shipping** - All freight terms are F.O.B. shipping point unless otherwise stated.

**Contested Shipments** - Any shipping or handling claims must be reported within 14 days of shipment. Claims not reported in this time period will not be allowed.

**Returned Goods** - Returns must be authorized prior to shipment to our warehouse. There is a handling charge on all returned goods.



119 West Pine Street, P.O. Box 867 Grove City, PA 16127  
 Phone: 724.458.8340 Fax: 724.458.8342 bashlin@bashlin.com





# BASHLIN'S FALL PROTECTION AND CLIMBING EQUIPMENT REGULATIONS AND REQUIREMENTS

The equipment used by linemen, cablemen, arborists, and tower workers is manufactured in accordance with consensus standards as well as regulations developed by federal or state authorities. These regulations are important for you because they provide guidelines not only for the users, but also the manufacturers and your employer.

Consensus standards are voluntarily developed. They are approved by the users and manufacturers of the products. The standards are administered by such bodies as the American National Standards Institute, (ANSI) and the American Society of Testing and Materials (ASTM). Following are some consensus standards that apply to these products:

## ANSI STANDARDS

- ANSI/ASSP Z359.1 The fall protection code 
- ANSI Z133 Safety requirements for arboricultural operations.
- ANSI A10.32 Standard for fall protection system used in construction  and demolition.


## ASTM STANDARD

- F887 Standard specifications for personal climbing equipment

## OSHA STANDARDS FOR GENERAL INDUSTRY

Government groups also write laws that they refer to as standards regarding such things as the use of these products. Many times, sections are based on the consensus standards. The difference is that they are mandatory.

Following are some standards that may apply to the users of these products.

- 1910.269 Electric power, generation, transmission and distribution.
- 1910.268 Telecommunications. 
- 1910.67 Vehicle mounted elevating and rotating work platforms.
- 1910.140 Personal fall protection systems.

## OSHA STANDARDS FOR CONSTRUCTION

- 1926 Subpart M Fall protection.
- 1926.500 to 1926.503
- 1926.954 Personal protective equipment.

For more information, contact your corporate safety professional, supervisor, local OSHA office or insurance carrier.

To the best of our knowledge, Bashlin equipment meets or exceeds all applicable standards or laws at the time of manufacture.

Bashlin Industries Inc. utilizes Underwriters Laboratories  for independent 3rd party certification on many products. Look for the  symbol. Certificates of compliance available on request and on our website.



**IMPORTANT INFO** is included with each product. It must be read and understood prior to use. If none is included with your product, or if there are any questions, contact us immediately. Failure to understand the information, or be properly trained prior to using the product may cause accidents, injury, or death.



Linemen's Climbing Equipment	Fall Protection and Rescue Equipment for Lineworkers and General Industry	Bags, Buckets and Tool Carriers
5	39	67
Line Vehicle Equipment and Construction Tools	Electrical Personal Protective Equipment	Gloves, PPE, and Training
79	91	101




### LINEMEN'S CLIMBING EQUIPMENT

**Bashlin Industries, Inc.** has been manufacturing tool belts, positioning devices, and climbers since 1926. Offering quality, comfort and durability, these products have been time tested and lineworker approved.

We recommend that the user understands how to properly use, inspect and maintain this equipment. Information about this appears in this catalog and more detailed information is included with Bashlin products.

# SIZING TOOL BELTS


Bashlin belts are sized using the measurement between the 2 D-Rings on the main portion of the belt (A).



2 D-Ring and 4 D-Ring belts are sized identically.

Measure for summer clothing. If the belt is the correct size, there will be ample adjustment for the relatively limited time it will be used in the colder weather.

If a belt is sized correctly, the hip D-Rings will point straight ahead, and the tongue adjustment will be in the center hole (B).

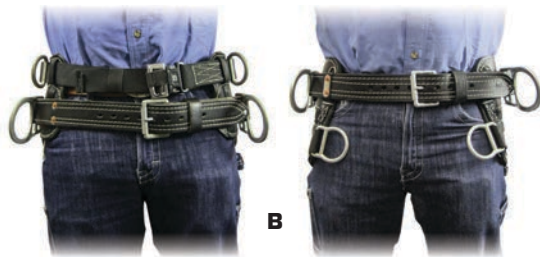

CORRECTLY SIZED TOOL BELT

## USE BASHLIN'S LINEMAN'S SIZING BELT (LSB) (E)

Estimate the correct size of your belt and adjust the LSB to the size you believe your belt should be.



Place the LSB on your hips at the location where your tool belt is worn (F).


By trial and error, change the length of the LSB until the belt is the correct length, and note the adjusted size of the belt (G).



USING THE LINEMEN'S SIZING BELT

## TO FIND YOUR D-RING SIZE USING A TAPE MEASURE

1. Locate the point where the heel of the hip D-Ring should rest (C).
2. Begin to measure from this point. Measure with a seamstress tape around the buttocks to the same point on the opposite side (D).

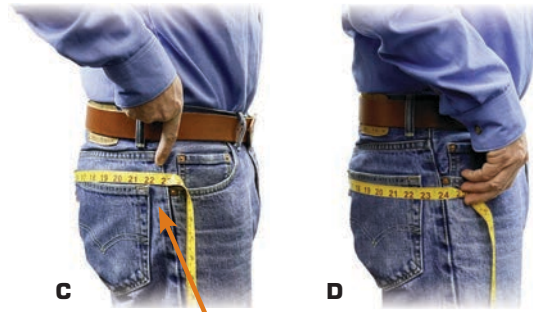

USING A TAPE MEASURE

## BELT ADJUSTMENT IN INCHES - PER ASTM F887

D Size - In.	Minimum	Center Hole	Maximum	Tool Loops
D18	32	36	40	3
D19	33	37	41	3
D20	34	38	42	3
D21	36	40	44	4
D22	37	41	45	4
D23	38	42	46	4
D24	40	44	48	4
D25	41	45	49	4
D26	42	46	50	4
D27	44	48	52	4
D28	45	49	53	4

USE YOUR PHONE TO SCAN THE QR CODE FOR SIZING INFO!



## FEATURES OF BASHLIN BELTS

### S-SHAPED D-RINGS:

This is Bashlin's original design. The toe lies away from the belt for easier snap engagement, while the curve reduces pressure on the hip for comfort.

### ALL LEATHER CUSHION SECTION:

The glove soft, rolled edge cushion provides for a belt which is cooler in the summer, yet flexible in cold weather.

### TOP QUALITY MATERIAL:

We utilize the highest quality hardware, nylons, and leathers available.

### BASHLIN CRAFTSMANSHIP:

Years of quality manufacturing are built into each product for a subtle, yet meaningful difference. We encourage side by side comparison.

## BASHLIN TOOL BELT STYLES

### 4 D-RING TOOL BELTS:



**88MX4D**  
**STACKED 4 D-RING**



**884D**  
**IN-LINE 4 D-RING**



**88BMX**  
**HIP-GRIP/REST-A-BACK 4 D-RING**



**88FFX**  
**STACKED FLEX-FIT 4 D-RING**



**1515PX**  
**STACKED FIXED 4 D-RING**

### 2 D-RING TOOL BELTS:



**1511N**  
**STANDARD - FIXED 2 D-RING**



**88**  
**SEMI-FLOATING - SHIFTING 2 D-RING**

**STANDARD EQUIPMENT ON BASHLIN BELTS INCLUDES:** 4 D-Rings for gut strap attachment (exception - Hip-Grip and Rest-A-Back belts), tape sling, knife snap, glove bag ring and 2 hammer loops and 4 tool loops.

**MADE TO ORDER BELTS** All "Made to Order" belts are manufactured outside of standard production. Once the order is placed, it cannot be cancelled. Please allow additional shipping time for all made to order belts.

**STOCK AND SPECIAL BELTS** Bashlin offers right handed belts, in sizes D18 to D28 of the most popular belts. Belt sizes may vary on different style belts. Larger belts, up to D32, may be ordered. There is an additional cost for sizes D29 to D32. Belts and holsters with left hand design are available at no additional cost. Add "LH" to the part number.

**NOTE:** D18, D19, and D20 tool belts have 3 tool loops due to the shorter belt section.

Bashlin 4 D-Ring Body Belts are patented under PAT 9.737.737, 10.099.073, 10.933.261, 10.946.248 and 12.042.678



# FLEX-FIT

## 88FFX4D CLIMBING BELT

Bashlin's 88FFX4D *FLEX-FIT* 4 D-Ring Climbing Belt allows the worker to easily adjust both upper and lower sets of D-Rings for a custom fit. This unique dual semi-float design allows both the upper and lower set of D-rings to move freely to improve comfort.

The innovative *FLEX-FIT* design allows this belt to be adjusted to fit three different D-sizes to maintain proper fit without sacrificing comfort. This adjustability lets the user quickly adjust the belt to accommodate heavier clothing in inclement weather or for changes in the user's weight over time.

The Bashlin 88FFX4D *FLEX-FIT* 4 D-Ring Climbing Belt is available with our standard padded leather comfort cushion or our new "Hybrid" cushion. The hybrid cushion has a soft leather outer shell and a padded nylon mesh interior cushion.

No. 88FFX4DMP Hybrid Mesh Cushion      Wt. 7.0 lb.  
 No. 88FFX4DCC Leather Comfort Cushion      Wt. 7.5 lb.



No. 88FFX4DCC  
 Shown with optional 25AF  
 and 111FLDSX



No. 88FFX4DMP

### SIZE CHART

Small	D18-D20
Medium	D21-D23
Large	D24-D26
X-Large	D27-D29
2X-Large	D30-D32

USE YOUR PHONE TO SCAN THE  
 QR CODE FOR MORE INFO!







# FLEX-FIT

## 88FFX4D CLIMBING BELT

### ADJUSTING THE 88FFX4D FLEX-FIT CLIMBING BELT

Find the two quick-adjusting polymer coated buckles on the back right side of the belt. The top D-saddle adjuster is located under the right tool loops and the bottom D-saddle adjuster is neatly stowed inside the leather pouch.

The D-size can be increased or decreased by lifting the finger tab on the adjuster and pulling on the saddle webbing in the desired direction. Size markings located on the belt body can be used as a reference when adjusting D-size. Once adjustments have been made, users should check the fit by taking a few steps up and down the pole. Pinching and discomfort can be a sign of improper adjustment. Repeat the previous steps if further adjustment is necessary.



### 25AF AND 25AMF2 SERIES NUT AND BOLT BAGS

These durable canvas nut and bolt bags have all the same features as our popular 25A and 25AM2 nut and bolt bags. The bags can be easily attached or removed from the 88FFX4D series tool belt with two small snap hooks.



No. 25AF	Nut and Bolt Bag	Wt. 0.7 lb.
No. 25AMF2	Nut and Bolt Bag with Magnet	Wt. 1.0 lb.

No. 25AF

No. 25AMF2

### 111F SERIES TOOL HOLSTERS

111F series tool holsters are built using the same great quality design and versatility as our standard Bashlin tool holsters. These holsters have two snap hooks for quick and easy attachment or removal from the 88FFX4D series tool belts.

No. 111FLSX	4 Pocket Holster	Wt. 1.25 lb.
No. 111FLEX	4 Pocket Holster with Knife Sheath	Wt. 1.50 lb.
No. 111FLDSX	5 Pocket Holster	Wt. 1.50 lb.
No. 111FLDSXE	5 Pocket Holster with Knife Sheath	Wt. 1.75 lb.



No. 111FLDSX

**\*\*Most standard nut and bolt bags and holsters are compatible with the 88FFX4D series belts as well\*\***

**USE YOUR PHONE TO SCAN THE QR CODE FOR MORE INFO!**



# 4 D-RING TOOL BELTS



88UX4DMP

## EZRIDER

- Like working in a "Rocking Chair".
- Saddle design relieves hip and leg pressure.
- Worn slightly higher than a standard tool belt.
- Semi-Float with shifting upper D-Rings and fixed lower D-Rings.

<b>No. 88UX4DMP</b>	Nylon mesh cushion	Wt. 6.5 lb.
<b>No. 88UX4DCC</b>	Leather comfort cushion	Wt. 7.0 lb.



1515PX4D

## EZRIDER LITE

- Our lightest 4 D-Ring belt.
- Nylon or leather cushion.
- Fixed 4 D-Ring.

<b>No. 1515PX4D</b>	Nylon cushion	Wt. 4.6 lb.
<b>No. 1515PX4DCC</b>	Leather comfort cushion	Wt. 4.8 lb.



**WARNING:** Never carry wire, tools, or anything other than the "positioning" strap in the D-Rings of a tool belt. Foreign objects carried in the D-Rings may cause the snap to malfunction and accidental disengagement to occur.

USE YOUR PHONE TO SCAN THE QR CODE FOR MORE INFO!



# Labrador

- 7" wide for support.
- Made in nylon mesh or soft leather cushion.
- 3 different design choices for different needs.
- Semi-Float with shifting lower D-Rings and fixed upper D-Rings.



Q88GX4DMP

## LABRADOR "AMIGO"

- Easy donning quick release buckle upper.
- Tongue and buckle lower.
- Easy to adjust nylon webbing.

<b>No. Q88GX4DMP</b>	Nylon mesh cushion	Wt. 5.5 lb.
<b>No. Q88GX4DCC</b>	Leather comfort cushion	Wt. 6.0 lb.



88GX4DCC

## LABRADOR "YUKON"

- Dependable double tongue design.
- Leather faced nylon billet.

<b>No. 88GX4DMP</b>	Nylon mesh cushion	Wt. 6.0 lb.
<b>No. 88GX4DCC</b>	Leather comfort cushion	Wt. 6.5 lb.



88MX4DMP

## LABRADOR "LIBERTY"

- The freedom of a single tongue.
- Durable 7" back.

<b>No. 88MX4DMP</b>	Nylon mesh cushion	Wt. 5.0 lb.
<b>No. 88MX4DCC</b>	Leather comfort cushion	Wt. 5.5 lb.

# 4 D-RING TOOL BELTS



88BMX4DCC



884D



88X4D

## BMX SERIES



- Modeled after Bashlin's Rest-A-Back and Hip Grip, this proven design offers excellent support.
- Double tongue and buckle design.
- Semi-Float with shifting lower D-Rings and fixed upper D-Rings.

<b>No. 88BMX4DMP</b>	Nylon mesh cushion	Wt. 7.0 lb.
<b>No. 88BMX4DCC</b>	Leather comfort cushion	Wt. 7.0 lb.
<b>No. 88BMX4D</b>	Durable leather back	Wt. 7.0 lb.

## FLORIDIAN 4D IN-LINE



- 4 D-Ring version of our traditional 88 Floridian belt.
- Semi-Float with shifting D-Rings.
- Leather Comfort Cushion.

<b>No. 884D</b>	Natural	Wt. 6.5 lb.
<b>No. 88X4D</b>	Black	Wt. 6.5 lb.



Q88BMX4DCC

## BMX Q SERIES



- Modeled after Bashlin's Rest-A-Back and Hip Grip, this proven design offers excellent support.
- Quick release buckles upper tongue.
- Semi-Float with shifting lower D-Rings and fixed upper D-Rings.

<b>No. Q88BMX4DMP</b>	Nylon mesh cushion	Wt. 7.0 lb.
<b>No. Q88BMX4DCC</b>	Leather comfort cushion	Wt. 7.0 lb.
<b>No. Q88BMX4D</b>	Durable leather back	Wt. 7.0 lb.



**WARNING:** All Bashlin's tool belts are to be worn snug as possible with the large D-Rings and billet on or above the hips. Wearing the belts improperly may cause accidents or death.

USE YOUR PHONE TO SCAN THE QR CODE FOR MORE INFO!



# 2 D-RING TOOL BELTS



88



88X

## FLORIDIAN



- Semi-Floating with shifting D-Rings.
- Leather Comfort Cushion

No. 88

Natural

Wt: 6.5 lb.

No. 88X

Black

Wt: 6.5 lb.



160N

## NYLON DELUXE



- Semi-Floating with shifting D-Rings.
- Light and durable nylon back.
- Comfortable leather cushion.
- Tongue and buckle is 6 ply nylon.
- Leather tool loops.

No. 160N

Leather comfort cushion

Wt: 6.0 lb.



1511N

## WRANGLER




- Fixed D-Rings and shifting billet.
- Neoprene nylon back and tongue.
- Lightweight.

No. 1511N

Leather comfort cushion

Wt: 5.25 lb.

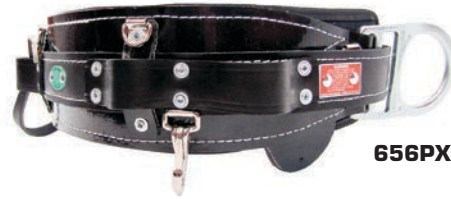

656PX



656CM

## 656 SERIES



- Fixed D-Ring style.
- Lightweight and versatile.
- Moisture wicking mesh pad.

No. 656PX

Black

Wt: 4.0 lb.

No. 656CM

Brown

Wt: 4.0 lb.



**WARNING:** Never carry wire, tools, or anything other than the "positioning" strap in the D-Rings of a tool belt. Foreign objects carried in the D-Rings may cause the snap to malfunction and accidental disengagement to occur.



# ORANGE STITCHED GEAR

CLIMBING BELTS, CLIMBER PADS AND TOOL HOLSTERS ARE NOW BEING OFFERED WITH ORANGE STITCHING AND THE SAME QUALITY AND COMFORT YOU'VE COME TO EXPECT FROM BASHLIN.



CONTACT US FOR MORE INFORMATION ABOUT OTHER ORANGE STITCHED PRODUCTS.

## EZ RIDER 4D-RING CLIMBING BELT



88UX4DCCO

- |                      |                         |             |
|----------------------|-------------------------|-------------|
| <b>No. 88UX4DCCO</b> | Leather Comfort Cushion | Wt. 7.0 lb. |
| <b>No. 88UX4DMP0</b> | Nylon Mesh Cushion      | Wt. 6.5 lb. |

## FLORIDIAN 4D INLINE CLIMBING BELT



\*Shown with optional aluminum D-rings

88X4D0

- |                     |                         |             |
|---------------------|-------------------------|-------------|
| <b>No. 88X4DCCO</b> | Leather Comfort Cushion | Wt. 6.5 lb. |
| <b>No. 88X4DMP0</b> | Nylon Mesh Cushion      | Wt. 6.0 lb. |

## TOOL HOLSTERS



111 HLDSX0

111HEX0

- |                     |                                    |              |
|---------------------|------------------------------------|--------------|
| <b>No. 11HLDSX0</b> | 5 Pocket Holster                   | Wt. 1.5 lb.  |
| <b>No. 111HEX0</b>  | 3 Pocket Holster With Knife Sheath | Wt. 1.25 lb. |

## 145 SERIES HOOK-N-LOOP CLIMBER PADS



145ACVWO

145FCVO

Hook-N-Loop climber pads with moisture wicking mesh padding and angled metal insert for added comfort

### Wide Profile Hook-N-Loop Climber Pad

**No. 145ACVWO** For BD16B and BD12 series climbers Wt. 3.5 lb.

**No. 145FCVWO** For BD14B aluminum climbers Wt. 3.5 lb.

### Standard Hook-N-Loop Climber Pad

**No. 145ACVO** For BD16B and BD12 Series Climbers Wt. 3.2 lb.



# ARBORIST SADDLES

## BASHLIN'S NEW 639 AND 640 SERIES TREE SADDLES

Incorporating a two D-Ring upper positioning belt and a two D-Ring lower bridge or two D-Ring seat strap assembly for suspension, these modular saddle systems are designed to provide both comfort and flexibility for the worker. The 639 Series Saddles utilize lightweight aluminum D-Rings and the 640 Series Saddles use durable steel D-Rings.

The upper belt is made using the patented Back-A-Line pad that utilizes a unique "curved and firm" back support within a non-stretch belt. Unlike other back belts the Back-A-Line works to dynamically correct posture by facilitating spinal muscles to work optimally. The non-stretch belt works to provide a point of resistance to utilize intra-abdominal pressure.

### 639BBS TREE SADDLE WITH SEAT STRAP

- Light weight aluminum D-Rings.
- Quick-Release buckles on leg straps.
- 3.5" padded seat strap with D-Rings.
- 8" wide lumbar support with nylon mesh pad.
- Leather faced nylon tongue and buckle
- Soft padding at hips.
- Contrasting orange stitching.
- 2 tool snaps and 2 accessory rings.
- Wt. 5.20 lb.



No. 639BBS



### 639BBL TREE SADDLE WITH BRIDGE

- Light weight aluminum D-Rings.
- Quick-Release buckles on leg straps.
- Step thru bridge design with floating D-Rings provides added comfort.
- 8" wide lumbar support with nylon mesh pad.
- Leather faced nylon tongue and buckle.
- Soft padding at hips.
- Padded leg straps.
- Contrasting orange stitching.
- 2 tool snaps and 2 accessory rings.
- Wt. 5.15 lb.



No. 639BBL



USE YOUR PHONE TO SCAN THE QR CODE FOR MORE INFO!





# ARBORIST SADDLES

The modular design of these belts allows the user to easily remove the back pad, leg pads, and seat strap for cleaning or replacement.

Please refer to sizing chart below:



Belt Size	Waist Size
Small	28-32
Medium	32-36
Large	36-40
X-Large	40-44



## 640BBS TREE SADDLE WITH SEAT STRAP

- Durable steel D-Rings.
- Pass thru buckles on leg straps.
- 3.5" padded seat strap with D-Rings.
- 8" wide lumbar support with nylon mesh pad.
- Soft padding at hips.
- 2 tool snaps and 2 accessory rings
- Wt. 5.9 lb.



No. 640BBS



## 640BBL TREE SADDLE WITH BRIDGE

- Durable steel D-Rings.
- Pass thru buckles on leg straps.
- Step thru bridge design with floating D-Rings provides added comfort.
- 8" wide lumbar support with nylon mesh pad.
- Soft padding at hips.
- 2 tool snaps and 2 accessory rings.
- Wt. 5.75 lb.



No. 640BBL



### - WARNING -

PROPER TRAINING IS REQUIRED BEFORE USING THESE PRODUCTS.

An improperly sized saddle will be uncomfortable and could result in accidental injury or death.



# AUXILIARY POSITIONING AND SUPPORT BELTS



**Q83H2D**



**83H2D**

## LABRADOR APB

- Easily convert your comfortable 2 D-Ring belt to a 4 D-Ring design.
- Quick release attachment straps.
- Fixed D-Rings for easy secondary lanyard connections.
- FR Arc resistant nylon fabric.
- Size required see sizing chart below.

<b>No. Q83H2D</b>	Labrador "Tucson" quick release belt	Wt. 3.0 lb.
<b>No. 83H2D</b>	Labrador "Sierra" billet style belt	Wt. 3.2 lb.

### SIZING

Add 4"-6" to the waist measurement  
 Small 32"-40" Medium 36"-44" Large 40"-48" X-Large 42"-50"



**80HDS**

## NYLON WEB SUSPENDERS

- Nylon web suspenders.
- Fully adjustable design (one size fits most).
- Lower belt not included\*.

<b>No. 80HDS</b>	Nylon web suspenders	Wt. 2.75 lb.
------------------	----------------------	--------------



**81-1**

**81**

## BELT SUPPORTER STRAP

- Distributes weight of belt and tools.
- Made from top quality russet leather.
- Four adjustable drop straps.
- Lower belt not included.

<b>No. 81</b>	Supporter strap	Wt. 1.50 lb.
<b>No. 81-1</b>	Leather drop strap only	Wt. 0.25 lb.



**80**

**80X**

## SAM BROWN SUSPENDERS

- Leather suspenders.
- Fully adjustable (one size fits most).
- Lower belt not included.

<b>No. 80</b>	Brown	Wt. 1.25 lb.
<b>No. 80X</b>	Black	Wt. 1.25 lb.

**WARNING:** Bashlin's Lineman's Belt Supporters are never to be used with a linemens's belt to create a "saddle". The linemens's belt always must be worn snugly, on or above the hips. Incorrect use may cause accidents or death.

 **NOT A SAFETY BELT** 



# BOLT AND NUT BAGS

## 25A

8 1/2" x 9" x 4" bolt and nut bag with a reinforced top to stay open.

- No corners to lose hardware.
- Features an inside pocket.
- Secures to a belt with two straps joined by snaps and D-Rings.
- Available in traditional canvas, black ballistic nylon, pink nylon, orange nylon, and camo nylon.



**No. 25A**

Natural Canvas

Wt: 0.7 lb.



**No. 25ABX**

Black ballistic nylon

Wt: 0.7 lb.



**No. 25A-P**

Pink nylon

Wt: 0.7 lb.



**No. 25A-0**

Orange nylon

Wt: 0.7 lb.



**No. 25A-C**

Camo nylon bag with straps

Wt: 0.7 lb.

## 25AM2 WITH MAGNET

Similar to the popular 25A with the addition of 3 inner tool loops, inside pocket and a strong magnet to hold onto hardware such as nuts and cotter keys.



**No. 25AM2**

Natural canvas

Wt: 1.0 lb.



**No. 25AM2BX**

Black ballistic nylon

Wt: 1.0 lb.



**No. 25AM2-P**

Pink nylon

Wt: 1.0 lb.



**No. 25AM2-0**

Orange nylon

Wt: 1.0 lb.



**No. 25AM2-C**

Camo nylon

Wt: 1.0 lb.

# BOLT AND NUT BAGS



## 26DRM

- Leather pouch with tool holders and adjustable leather straps.

**No. 26DRM** 9" x 9" x 2 1/2" Wt: 0.5 lb.



## 25BS

- Canvas with snap and leather tie attachment.

**No. 25BS** 8" x 9" x 2 1/2" Wt: 0.5 lb.



## 25PLS

- An all leather bag with reinforced top.
- Snap and leather tie attachment.

**No. 25PLS** 8" x 9" x 3" Wt: 0.9 lb.



## 25KLBS

- Durable leather with snap and leather tie attachment.

**No. 25KLBS** 8" x 9" x 2 1/2" Wt: 0.8 lb.



## 25PS

- Wide opening canvas bag with leather bottom.
- Snap and leather tie attachment.

**No. 25PS** 8" x 8" x 2 1/2" Wt: 0.6 lb.



26L

26LX

## 26L

- Very heavy, durable leather.
- Features a double top to stay open.
- Leather tie attachment.

**No. 26L** 9" x 9" x 2 1/2" Wt: 0.7 lb.

**No. 26LX** 9" x 9" x 2 1/2" Wt: 0.7 lb.



## 25R

- Cotton duck bag with 1" straps and leather ties.
- Reinforced top to keep open.

**No. 25R** 8" x 8 1/2" x 4" Wt: 0.5 lb.



## 26G

- A soft leather bag with snap closure and adjustable leather straps.

**No. 26G** 8 1/2" x 9" Wt: 0.5 lb.

# LINEMEN'S HOLSTERS

Bashlin manufactures only premium holsters for tool belts. They feature double harness leather backs reinforced for extra wear. All holsters come with the hardware necessary for proper attachment.



111HS



111HSX

## 3 POCKET HOLSTER

For pliers, rule, screwdriver, and knife or wrench.

<b>No. 111HS</b>	Natural	Wt: 1.0 lb.
<b>No. 111HSX</b>	Black	Wt: 1.0 lb.



111HLS



111HLSX

## 4 POCKET HOLSTER

For pliers, rule, screwdriver, Channellock®, and knife or wrench.

<b>No. 111HLS</b>	Natural	Wt: 1.25 lb.
<b>No. 111HLSX</b>	Black	Wt: 1.25 lb.



111HLDS



111HLDSX

## 5 POCKET HOLSTER

For pliers, rule, screwdriver, Channellock®, ratchet driver, and knife or wrench.

<b>No. 111HLDS</b>	Natural	Wt: 1.5 lb.
<b>No. 111HLDSX</b>	Black	Wt: 1.5 lb.



111HE



111HEX

## 3 POCKET HOLSTER AND KNIFE SHEATH

For pliers, rule, screwdriver, and knife.

<b>No. 111HE</b>	Natural	Wt: 1.25 lb.
<b>No. 111HEX</b>	Black	Wt: 1.25 lb.



111HLE



111HLEX

## 4 POCKET HOLSTER AND KNIFE SHEATH

For pliers, screwdriver, Channellock®, rule, and knife.

<b>No. 111HLE</b>	Natural	Wt: 1.5 lb.
<b>No. 111HLEX</b>	Black	Wt: 1.5 lb.



111HLDSE



111HLDSEX

## 5 POCKET HOLSTER AND KNIFE SHEATH

For pliers, rule, screwdriver, Channellock®, ratchet driver, and knife and wrench.

<b>No. 111HLDSE</b>	Natural	Wt: 1.75 lb.
<b>No. 111HLDSEX</b>	Black	Wt: 1.75 lb.

# LINEMEN'S SHORT BACK SERIES HOLSTERS

Designed for use with Bashlin EZ RIDER and EZ RIDER LITE series climbing belts. Can make reaching tools a little easier.



111HLS-S



111HLSX-S



111HLDS-S



111HLDSX-S

## SHORT BACK 4 POCKET HOLSTER

For pliers, rule, screwdriver, Channellock®, and knife or wrench.

<b>No. 111HLS-S</b>	Natural	Wt: 1.0 lb.
<b>No. 111HLSX-S</b>	Black	Wt: 1.0 lb.

## SHORT BACK 5 POCKET HOLSTER

For pliers, rule, screwdriver, Channellock®, ratchet driver, and knife or wrench.

<b>No. 111HLDS-S</b>	Natural	Wt: 1.25 lb.
<b>No. 111HLDSX-S</b>	Black	Wt: 1.25 lb.

## 111F SERIES TOOL HOLSTERS

These holsters have two snap hooks for easy attachment or removal from the 88FFX4D Flex-Fit series tool belts.



111FLSX



111FLEX



111FLDSX



111FLSXE

## 4 POCKET FLEX HOLSTER

For pliers, rule, screwdriver, Channellock®, and knife or wrench.

<b>No. 111FLSX</b>	Black	Wt: 1.25 lb.
<b>No. 111FLEX</b>	With knife holster	Wt: 1.50 lb.

## 5 POCKET FLEX HOLSTER

For pliers, rule, screwdriver, Channellock®, ratchet driver, and knife or wrench.

<b>No. 111FLDSX</b>	Black	Wt: 1.50 lb.
<b>No. 111FLSXE</b>	With knife sheath	Wt: 1.75 lb.

# LINEMEN'S HOLSTERS



111SK



111SKX



4HP

## SKINNING KNIFE HOLSTER

No. 111SK Brown  
 No. 111SKX Black

Wt: 0.75 lb.  
 Wt: 0.75 lb.

## BASHLIN HOLSTER PACK

- Contains two rivet type screws, one small D-Ring, and piece of leather (black or brown) to attach tool holster to belt.

4HP Natural Wt: 0.1 lb.  
 4HPX Black Wt: 0.1 lb.



111BWH



111BWHX

## BELL WRENCH HOLDER

No. 111BWH Brown  
 No. 111BWHX Black

Wt: 0.6 lb.  
 Wt: 0.6 lb.



4STR

## 4 SCREW TYPE RIVETS TO SECURE HOLSTER TO BELT

4STR Screw type rivets Wt: 0.05 lb.



111LWH



111LWHX

## LOWELL WRENCH HOLDER

No. 111LWH Natural  
 No. 111LWHX Black

Wt: 0.6 lb.  
 Wt: 0.6 lb.



Left handed holsters are available at no extra cost. (Add an "-LH" to the part number when ordering.)

# GROUNDMAN HOLSTER ACCESSORIES - CARE



112HLS



112HLSX

## GROUNDMEN'S HOLSTER

Bashlin's 4 pocket slotted groundmen's holster can comfortably hold your pliers, rule, screwdriver, knife, channellock, or wrench. **\*\*Do not use on linemen's tool belts\*\***

- No. 112HLS      Natural                      Wt: 1.0 lb.
- No. 112HLSX    Black                              Wt: 1.0 lb.



33



33L

## HANDLINE CARRIER

The nylon handline carrier fits over the tongue-buckle section of the belt. It is designed to straighten and drop the rope if the handline becomes snagged. The 33L locks on the belt.

- No. 33              Handline carrier                      Wt: 0.1 lb.
- No. 33L            Handline carrier with lock        Wt: 0.1 lb.



31LX



31L



31R

## TAPE SLINGS

These swivel bar tape slings will fit any size tape roll. For black - add "X" to part number.

- No. 31L            Loop type                              Wt: 0.1 lb.
- No. 31R            Rivet type                              Wt: 0.1 lb.



**WARNING:** Do not use groundmen's or electrician's holsters on linemen's tool belts.



32A    32AR    32B    32BR



32AX    32ARX    32BX    32BRX

## LOOP-N-SNAP

These convenient extra snaps will fit 2" belts. For black - add "X" to part number.

- No. 32A            Small snap for knives              Wt: 0.2 lb.
- No. 32AR        Small snap with screw rivets      Wt: 0.2 lb.
- No. 32B            Large snap for wrenches          Wt: 0.3 lb.
- No. 32BR        Large snap with screw rivets      Wt: 0.3 lb.

806-32

806-16

806-8



804

809

## LEATHER MAINTENANCE PRODUCTS

Long life for your leather products begins with proper care. Use Saddle Soap to clean the dirt out of the leather, then coat the leather to protect them with "Neatsfoot" or Mink Oil.

- No. 804            Saddle Soap                              Wt: .75 lb.
- No. 806-8        Neatsfoot Oil (8 oz.)                Wt: .50 lb.
- No. 806-16      Neatsfoot Oil (16 oz.)               Wt: 1.0 lb.
- No. 806-32      Neatsfoot Oil (32 oz.)               Wt: 2.0 lb.
- No. 809            Mink Oil                                    Wt: .30 lb.

# POLE CLIMBERS



Pads in all climber kits will be black.

## BD14B ALUMINUM

- Lightweight aluminum climber.
- Features replaceable gaffs.
- Weighs the same as comparable titanium climbers.
- Offset design gives great climbing qualities.
- Gaff guards included.

<b>No. BD14B-1N</b>	Aluminum alloy with bottom straps.	Wt: 3.50 lb.
<b>No. BD14B-2N</b>	Bottom straps and top straps.	Wt: 4.25 lb.
<b>No. BD14B-3N</b>	Bottom straps, top straps and #110DX pads.	Wt: 5.25 lb.



Natural Aluminum  
BD14B



Black Anodized  
BD14BX



OD Green Anodized  
BD14BOD

<b>No. BD14B-4N</b>	Bottom straps, top straps and #130DX pads.	Wt: 5.50 lb.
<b>No. BD14B-5N</b>	Bottom straps, top straps and #140DSX pads.	Wt: 5.75 lb.
<b>No. BD14BP-1N</b>	For CCA poles - polished gaffs	Wt: 3.5 lb.
<b>No. BD14BA-1N</b>	Longer top slide (18"-21").	Wt: 3.50 lb.

## BD16B STEEL

- Our most popular steel alloy climber.
- Features replaceable gaffs.
- Extra ankle room for added comfort.
- Offset design gives great climbing qualities.
- Gaff guards included.

<b>No. BD16B-1N</b>	Steel alloy, straight shanks with bottom straps.	Wt: 5.0 lb.
<b>No. BD16B-2N</b>	Bottom straps and top straps.	Wt: 6.0 lb.
<b>No. BD16B-3N</b>	Bottom straps and #110DX pads.	Wt: 6.5 lb.



BD16B

<b>No. BD16B-4N</b>	Bottom straps, top straps and #130DX pads.	Wt: 6.75 lb.
<b>No. BD16B-5N</b>	Bottom straps, top straps and #140DSX pads.	Wt: 7.0 lb.
<b>No. BD16BP-1N</b>	For CCA poles - polished gaffs.	Wt: 5.0 lb.
<b>No. BD16BA-1N</b>	Longer top slide (18"-21").	Wt: 5.0 lb.

## BD16BC TWISTED SHANK STEEL

- Durable steel alloy climber.
- Features replaceable gaffs.
- Has a 3° twisted shank so the climber lays flat against the leg.
- Extra ankle room like the BD16B.
- Gaff guards included.

<b>No. BD16BC-1N</b>	Steel alloy, twisted shank with bottom straps.	Wt: 5.0 lb.
<b>No. BD16BC-2N</b>	Bottom straps and top straps.	Wt: 6.0 lb.
<b>No. BD16BC-3N</b>	Bottom straps, top straps and #110DX pads.	Wt: 6.5 lb.



BD16BC

<b>No. BD16BC-4N</b>	Bottom straps, top straps and #130DX pads.	Wt: 7.0 lb.
<b>No. BD16BC-5N</b>	Bottom straps, top straps and #140DSX pads.	Wt: 7.0 lb.
<b>No. BD16BCP-1N</b>	For CCA poles - polished gaffs.	Wt: 5.0 lb.
<b>No. BD16BCA-1N</b>	Longer top slide (18"-21").	Wt: 5.0 lb.



All Bashlin Climbers feature Bashlin's superior performing 17° gaff. Gaff Guards and a Gaff Gauge are included with Bashlin Climbers. The standard top slide length has an adjustment of 15"-18". There are longer top slides available, with an adjustment of 18"-21" (A).

# POLE CLIMBERS

## BD12 STEEL

- Lightweight, steel alloy climber.
- Features riveted non-replaceable gaffs.
- Excellent climbing characteristics.
- Offset design places gaff in proper position for easier penetration.
- Gaff guards included.



<b>No. BD12-1N</b>	Steel alloy with bottom straps.	Wt: 5.0 lb.	<b>No. BD12-4N</b>	Bottom straps, top straps and #130DX pads.	Wt: 6.25 lb.
<b>No. BD12-2N</b>	Bottom straps and top straps.	Wt: 5.5 lb.	<b>No. BD12-5N</b>	Bottom straps, top straps and #140DSX pads.	Wt: 6.5 lb.
<b>No. BD12-3N</b>	Bottom straps, top straps and #110DX pads.	Wt: 6.0 lb.	<b>No. BD12P-1N</b>	For CCA poles - polished gaffs.	Wt: 5.0 lb.
			<b>No. BD12A-1N</b>	Longer top slide (18"-21").	Wt: 5.0 lb.

## BD12C TWISTED SHANK STEEL

- This steel alloy climber is an excellent value.
- Features a riveted non-replaceable gaff.
- Has a 3° twisted shank so the climbers lay flat against the leg.
- Offset design places gaff in proper position for easier penetration.
- Gaff guards included.



<b>No. BD12C-1N</b>	Steel alloy, twisted shank with bottom straps.	Wt: 5.0 lb.	<b>No. BD12C-4N</b>	Bottom straps, top straps and #130DX pads.	Wt: 6.25 lb.
<b>No. BD12C-2N</b>	Bottom straps and top straps.	Wt: 5.5 lb.	<b>No. BD12C-5N</b>	Bottom straps, top straps and #140DSX pads.	Wt: 6.5 lb.
<b>No. BD12C-3N</b>	Bottom straps, top straps and #110DX pads.	Wt: 6.0 lb.	<b>No. BD12CP-1N</b>	For CCA poles - polished gaffs.	Wt: 5.0 lb.
			<b>No. BD12CA-1N</b>	Longer top slide (18"-21").	Wt: 5.0 lb.

## BD12L STEEL

- Steel alloy climber.
- Features a riveted non-replaceable gaff.
- Has a narrower stirrup, it measures 3 3/4", the standard measurement is 4 3/4".
- Offset design places gaff in proper position for easier penetration.
- Gaff guards included.



<b>No. BD12L-1N</b>	Steel alloy, narrow stirrup with bottom straps.	Wt: 5.0 lb.	<b>No. BD12L-4N</b>	Bottom straps, top straps and #130DX pads.	Wt: 6.25 lb.
<b>No. BD12L-2N</b>	Bottom straps and top straps.	Wt: 5.5 lb.	<b>No. BD12L-5N</b>	Bottom straps, top straps and #140DSX pads.	Wt: 6.5 lb.
<b>No. BD12L-3N</b>	Bottom straps, top straps and #110DX pads.	Wt: 6.0 lb.	<b>No. BD12LP-1N</b>	For CCA poles - polished gaffs.	Wt: 5.0 lb.
			<b>No. BD12LA-1N</b>	Longer top slide (18"-21").	Wt: 5.0 lb.



# TREE CLIMBERS

Available in lightweight aluminum and steel. Bashlin tree climbers offer the same trusted comfort, durability and reliability as our pole climbers.

- 2 -1/2" replaceable gaff to penetrate thick bark.
- Standard Top Slide (15"-18") included.
- Longer Top Slides (18"-21") available.
- Leather gaff guards included.

## BD14BT SERIES ALUMINUM TREE CLIMBERS

- Lightweight aluminum alloy.
- Weighs the same as comparable titanium climbers.
- Offset design for superior climbing qualities.
- Replaceable gaffs.

<b>No. BD14BT-1N</b>	Aluminum alloy with bottom straps.	Wt. 3.50 lb.
<b>No. BD14BT-2N</b>	Aluminum alloy with top and bottom straps.	Wt. 4.75 lb.
<b>No. BD14BT-3N</b>	Aluminum alloy with top straps, bottom straps, and #110DX pads.	Wt. 5.25 lb.
<b>No. BD14BT-4N</b>	Aluminum alloy with top straps, bottom straps, and #130DX pads.	Wt. 5.50 lb.
<b>No. BD14BT-5N</b>	Aluminum alloy with top straps, bottom straps, and #140DSX pads.	Wt. 5.75 lb.



Natural  
BD14BT



Black  
Anodized  
BD14BTX



OD Green  
BD14BTOD

## BD16BT SERIES STEEL TREE CLIMBERS

- Durable steel alloy.
- Extra ankle room for added comfort.
- Offset design for superior climbing qualities.
- Replaceable gaffs.

<b>No. BD16BT-1N</b>	Steel with bottom straps.	Wt. 5.00 lb.
<b>No. BD16BT-2N</b>	Steel alloy with top and bottom straps.	Wt. 5.50 lb.
<b>No. BD16BT-3N</b>	Steel alloy with top straps, bottom straps, and #110DX pads.	Wt. 6.00 lb.
<b>No. BD16BT-4N</b>	Steel alloy with top straps, bottom straps, and #130DX pads.	Wt. 6.25 lb.
<b>No. BD16BT-5N</b>	Steel alloy with top straps, bottom straps, and #140DSX pads.	Wt. 6.25 lb.



No. BD16BT-1N

## BD16BCT SERIES STEEL TREE CLIMBERS

- Durable steel alloy.
- Has a 3° twisted shank so the climber lays flat against the leg.
- Extra ankle room for added comfort.
- Offset design for superior climbing qualities.
- Replaceable gaffs.

<b>No. BD16BCT-1N</b>	Steel with bottom straps.	Wt. 5.00 lb.
<b>No. BD16BCT-2N</b>	Steel alloy with top and bottom straps.	Wt. 5.50 lb.
<b>No. BD16BCT-3N</b>	Steel alloy with top straps, bottom straps, and #110DX pads.	Wt. 6.00 lb.
<b>No. BD16BCT-4N</b>	Steel alloy with top straps, bottom straps, and #130DX pads.	Wt. 6.25 lb.
<b>No. BD16BCT-5N</b>	Steel alloy with top straps, bottom straps, and #140DSX pads.	Wt. 6.50 lb.



No. BD16BCT-1N

USE YOUR PHONE TO SCAN THE QR CODE FOR MORE INFO!



# CLIMBER PADS

## SPUR-STAY CLIMBER PADS

Developed by a local lineman over 50 years ago, Bashlin introduced the 105 series "Spur-Stay" climber pads with metal inserts for the lineman looking for comfort and shank control.

The Spur-Stay design allows the climber to adjust the position of the shank, and eliminates "kick-back". It is available with straps or Hook-N-Loop closures.



145BCV



145AC

145BC

### 145ACV/145BCV/145FCV

This Hook-N-Loop cinch closure pad has deep padding, moisture wicking mesh, and an angled metal insert.

- |                   |   |             |
|-------------------|---|-------------|
| <b>No. 145ACV</b> | For BD16B series and BD12 series climbers | Wt. 3.2 lb. |
| <b>No. 145BCV</b> | For BD14 climbers                         | Wt. 3.2 lb. |
| <b>No. 145FCV</b> | For BD14B climbers                        | Wt. 3.2 lb. |

### 145AC/145BC/145FC

This Durable Leather "wide" climber pad has moisture wicking padding, metal insert and top climber straps.

**\*\* 2 pairs of straps included with pads \*\***

- |                  |   |             |
|------------------|---|-------------|
| <b>No. 145AC</b> | For BD16B series and BD12 series climbers | Wt. 3.3 lb. |
| <b>No. 145BC</b> | For BD14 climbers                         | Wt. 3.3 lb. |
| <b>No. 145FC</b> | For BD14B climbers                        | Wt. 3.3 lb. |



145BCVW



105BC



105FCX

### 145ACVW/145BCVW/145FCVW

This "wide" pad combines the Hook-N-Loop cinch closure pad combined with sturdy leathers, moisture wicking padding, and angled metal inserts to provide added comfort.

- |                    |   |             |
|--------------------|---|-------------|
| <b>No. 145ACVW</b> | For BD16B series and BD12 series climbers | Wt. 3.6 lb. |
| <b>No. 145BCVW</b> | For BD14 climbers                         | Wt. 3.6 lb. |
| <b>No. 145FCVW</b> | For BD14B climbers                        | Wt. 3.6 lb. |

### 105AC/105BC/105FCX

This is the original Spur-Stay design. It is lightweight, yet provides comfort and total climber control.

- |                   |   |             |
|-------------------|---|-------------|
| <b>No. 105AC</b>  | For BD16B series and BD12 series climbers | Wt. 1.5 lb. |
| <b>No. 105BC</b>  | For BD14 climbers                         | Wt. 1.5 lb. |
| <b>No. 105FCX</b> | For BD14B climbers                        | Wt. 1.5 lb. |

**i** Replacement Irons add "R" to the above part numbers. Sold in pairs.

**i** For climber pads with "straight" metal inserts drop "C" from above part number.

# CLIMBER PADS



150V



## 150V - HOOK-N-LOOP PADS

- Constructed from woven nylon with a soft padding sewn inside.
- Hook-N-Loop closure for extra security.
- Leather tunnel loop to keep the pad in place on the climber.

**No. 150V** Hook-N-Loop with "T" design Wt: 1.8 lb.




130D

130DX

## 130D

- Bashlin's original "L" pad.
- Constructed from durable russet leather.
- Light padding for comfort, while still keeping the pad lightweight.
- Allows shank movement for linemen that prefer less restriction.

**No. 130D** Natural padded Wt: 0.7 lb.  
**No. 130DX** Black padded Wt: 0.7 lb.

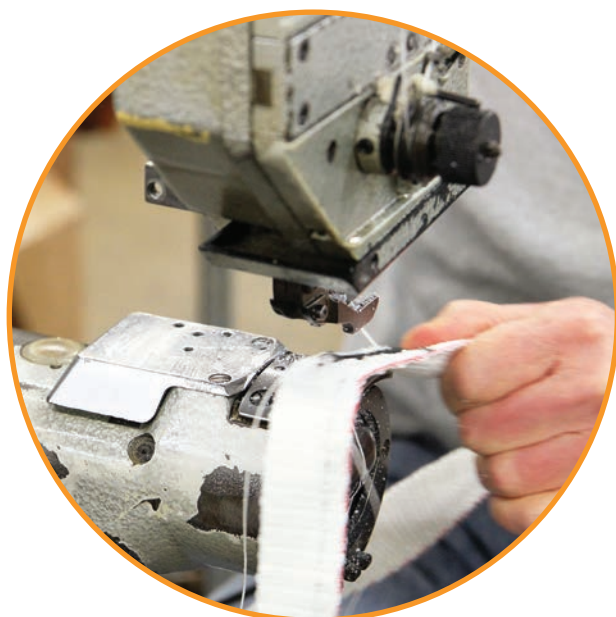

140DS

140DX

## 140D SERIES

- Constructed from durable russet leather.
- Wing design holds the shank securely, and at a slight angle for enhanced control.
- Climber shank fits inside the pad, to add comfort while reducing movement.
- The shank area is available with or without padding.

**No. 140D** Natural Wt: 0.8 lb.  
**No. 140DS** Natural padded Wt: 1.25 lb.  
**No. 140DX** Black Wt: 0.8 lb.  
**No. 140DSX** Black padded Wt: 1.25 lb.

# CLIMBER PARTS AND ACCESSORIES



85N - 24"



89N - 28"



87N - 28"



85 NPX

## CLIMBER STRAPS

- Constructed from durable, pliable, and comfortable neoprene nylon (N) or flexible "Bioplastic" coated webbing (NP).
- Double riveted and feature a protective buckle shield.

### TOP CLIMBER STRAPS

<b>No. 85N</b>	1 1/16"x24"	Wt: 0.6 lb.
<b>No. 85NP</b>	1 1/16"x24"	Wt: 0.6 lb.
<b>No. 85NPX</b>	1 1/16"x24" Black	Wt: 0.6 lb.
<b>No. 86N</b>	1 1/16"x28"	Wt: 0.6 lb.
<b>No. 86NP</b>	1 1/16"x28"	Wt: 0.6 lb.
<b>No. 86NPX</b>	1 1/16"x28" Black	Wt: 0.6 lb.

### BOTTOM STRAPS

<b>No. 87N</b>	1 1/16"x28" two piece	Wt: 0.7 lb.
<b>No. 87NP</b>	1 1/16"x28" two piece	Wt: 0.7 lb.
<b>No. 87NPX</b>	1 1/16"x28" two piece Black	Wt: 0.7 lb.
<b>No. 89N</b>	1 1/16"x28" two piece split ring	Wt: 0.7 lb.
<b>No. 89NP</b>	1 1/16"x28" two piece split ring Black	Wt: 0.7 lb.
<b>No. 89NPX</b>	1 1/16"x28" two piece split ring Black	Wt: 0.7 lb.



14TSB



14ATS



16TS



16ATS

## TOP SLIDES (screws are included)

- Fits all Bashlin climbers.
- The standard adjustment is 15"-18".
- There are longer top slides available, with an adjustment of 18"-21".
- Order according to your climbers.

<b>No. 14TSB</b>	For BD14B, 15"-18"	Wt: 0.6 lb.
<b>No. 14ATS</b>	For BD14B, 18"-21"	Wt: 0.85 lb.
<b>No. 16TS</b>	For BD16B, BD12, 15"-21"	Wt: 0.6 lb.
<b>No. 16ATS</b>	For BD16B, BD12, 18"-21"	Wt: 0.85 lb.
<b>No. 14TS</b>	For BD14, 15"-18"	Wt: 0.6 lb.
<b>No. 14ATS</b>	For BD14, 18"-21"	Wt: 0.85 lb.

## SCREWS



3

## CLIMBER STRAP SPLIT RING

<b>No. 3</b>	Split ring for climber straps (package of 2)	Wt: 0.15 lb.
--------------	--	--------------



4G




4T

- Screws are small and easy to lose.
- Bashlin offers replacement screws for gaffs and top slides.

<b>No. 4G</b>	Gaff screws	Wt: .05 lb.
<b>No. 4T</b>	Top slide screws	Wt: .05 lb.

# CLIMBER PARTS AND ACCESSORIES

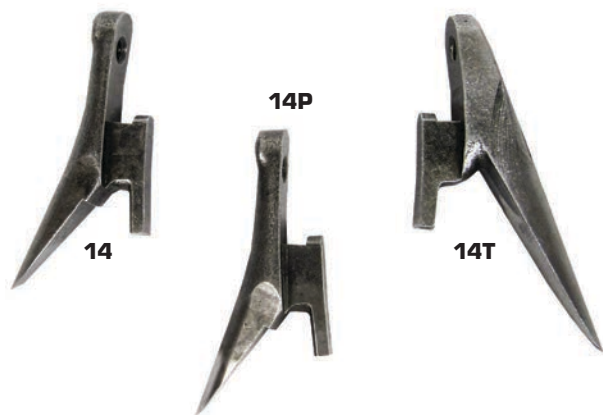

## REPLACEMENT GAFFS

- Fits the BD14, BD14B, BD16B, and BD16BC climbers.
- The standard 14 gaff is 1 5/8" long.
- The 14P gaff is 1 5/8" and had the machine marks removed for easier penetration on hard/CCA poles.
- Includes new gaff screws (4G).

<b>No. 14</b>	1 5/8" pole gaffs	Wt: 0.5 lb.
<b>No. 14P</b>	1 5/8" polished pole gaffs	Wt: 0.5 lb.
<b>No. 14T</b>	2 1/2" tree gaffs	Wt: 0.6 lb.


**\*Only Bashlin Replacement Gaffs may be used on Bashlin Climbers.**



## GAFF SHAPING KIT

- Nice compact design.
- Contains all of the tools needed to properly care for the gaffs on your Bashlin climbers.
- Includes #5 gaff gauge, 6" mill file with wooden handle, sharpening stone, and instructions.
- For use with Bashlin pole gaffs only.

<b>No. 27</b>	Gaff shaping kit	Wt: 0.55 lb.
---------------	------------------	--------------



## GAFF GAUGE

- For use with Bashlin pole climbers only.
- Used to maintain the correct shape, taper, and profile of your gaffs.
- Shaping instructions are included.

<b>No. 5</b>	Gaff gauge	Wt: 0.2 lb.
--------------	------------	-------------



## GAFF GUARDS

- Helps keep the gaff protected.
- Helps to protect the user from scratches and puncture wounds.
- Sold in pairs.

<b>No. 2</b>	Standard leather guard with Hook-N-Loop	Wt: 0.2 lb.
<b>No. 2SC</b>	Deluxe leather guard with Hook-N-Loop attachment	Wt: 0.25 lb.
<b>No. B1972G</b>	Snap on guard for replaceable gaffs	Wt: 0.2 lb.
<b>No. B1972F</b>	Snap on guard for fixed gaffs	Wt: 0.2 lb.



## HEEL COVER

- Wearing a pair of climbers exposes the lineman's ankle and Achilles tendon to potential injury.
- Covers this vulnerable area, while not restricting any movement.
- They are light, durable, and easily attach to any standard climber.

<b>No. BHP</b>	One size fits most, sold as pair	Wt: .5 lb.
----------------	----------------------------------	------------

# FALL RESTRICTING DEVICE



**BASHLINPATRIOT™**



HARDENED INNER ROPE ROLLERS ARE DURABLE AND ALLOW GREATER MOBILITY ON THE POLE.



NEW ROPE CLAMP ALLOWS POLE ROPE REPLACEMENT IN THE FIELD.



BIGGER HANDLES ARE EASIER TO GRIP.



## THE PATRIOT™

New and unique design that frees the lineman from the “Tyranny and Restriction” of other fall restraint products.

- Easy, natural movement up and down the pole.
- Light weight - over 20% lighter than other devices.
- Easy movement and light weight=less fatigue for the climber.
- Rope rollers allow freedom of movement left and right while working.
- Easily adapts for left and right handed climbers.

 Video is available on our website or scan the QR code

<b>No. 76PAT</b>	6" - 20" diameter poles	Wt: 3.5 lb.
<b>No. 76PAT-T</b>	6" - 30" diameter poles	Wt: 3.5 lb.

### REPLACEMENT PARTS

<b>No. 76PAT-ORC</b>	Includes replacement pole rope and rope clamp	Wt: 1.0 lb.
<b>No. 76PAT-OR</b>	Includes replacement rope	Wt: .75 lb.



## AS A RESULT OF INDEPENDENT TESTING THE PATRIOT HAS BEEN CLASSIFIED AS “ERGONOMIST APPROVED”.

It's 3.5 lb. weight is less than the 4 lb. weight threshold determined by ergonomist studies to cause damaging repetitive motion strains.

The Patriot reduces stress on the arms and shoulders and potential repetitive strain injuries caused by climbing with other Fall Restraint Devices.

\*The Patriot meets ASTM F887 Type A/B requirement, including icy or slippery poles.



**WARNING:** The carabiners, connector slot and connector latch should be free from debris, open easily and close completely. Verify all connections. The rope clamp should have no signs of stress, no loose screws, nor indicate movement of the line. The red wear indicators of the black outer line, or the red/white/blue inner line should not be visible. If your Patriot has any of these discrepancies, it must be removed from service.

USE YOUR PHONE TO SCAN THE QR CODE FOR MORE INFO!



# ADJUSTABLE ROPE POSITIONING LANYARDS



4019NXBC-8



4019UX-8

## 4016 LANYARDS - STANDARD ADJUSTOR



<b>No. 4016NX-8</b>	PVC wear cover	Wt. 2.35 lb.
<b>No. 4016NXBC-8</b>	Ballistic nylon wear cover	Wt. 2.35 lb.
<b>No. 4016UX-8</b>	Parallel Core	Wt. 2.35 lb.
<b>No. 4016NX-8SW</b>	PVC cover/swivel snap	Wt. 2.40 lb.
<b>No. 4016NXBC-8SW</b>	Ballistic nylon/swivel snap	Wt. 2.40 lb.
<b>No. 4016UX-8SW</b>	Parallel Core/swivel snap	Wt. 2.40 lb.
<b>No. 4016NX-8AL</b>	PVC/aluminum hook	Wt. 2.15 lb.
<b>No. 4016NXBC-8AL</b>	Ballistic/aluminum hook	Wt. 2.15 lb.
<b>No. 4016UX-8AL</b>	Parallel Core/aluminum hook	Wt. 2.15 lb.

## 4019 LANYARDS - 90° TWIST



<b>No. 4019NX-8</b>	PVC wear cover	Wt. 2.35 lb.
<b>No. 4019NXBC-8</b>	Ballistic nylon wear cover	Wt. 2.35 lb.
<b>No. 4019UX-8</b>	Parallel Core	Wt. 1.50 lb.
<b>No. 4019NX-8SW</b>	PVC cover/swivel snap	Wt. 2.40 lb.
<b>No. 4019NXBC-8SW</b>	Ballistic nylon/swivel snap	Wt. 2.40 lb.
<b>No. 4019UX-8SW</b>	Parallel Core/swivel snap	Wt. 2.40 lb.
<b>No. 4019NX-8AL</b>	PVC/aluminum hook	Wt. 2.15 lb.
<b>No. 4019NXBC-8AL</b>	Ballistic/aluminum hook	Wt. 2.15 lb.
<b>No. 4019UX-8AL</b>	Parallel Core/aluminum hook	Wt. 2.15 lb.



## 4018TX-8AL

Constructed with 11.5MM Kernmantle Rope, "RAD" device, and an aluminum snap hook. The abrasion and cut resistance of the "TECHNORA" over-braid eliminates the need for additional wear jackets or PVC covers. The "RAD" (Rope Adjustment Device) features an internal breaking system and spring loaded flip out handle which allows for easy one hand operation.

**No. 4018TX-8AL** Wt. 2.25 lb.



## 4019TX-8AL

Constructed with 11.5MM Kernmantle Rope, 90° twist stop adjuster and an aluminum snap hook, this device will hold up under challenging conditions. The abrasion and cut resistance of the "TECHNORA" over-braid eliminates the need for additional wear jackets or PVC covers.

**No. 4019TX-8AL** Wt. 1.80 lb.

# ADJUSTABLE ROPE POSITIONING LANYARDS

- Bashlin's Rope Lanyards for transitioning obstacles when climbing or descending poles are available in several materials with multiple wear protection, adjuster, and snap-hook options.
- Twist lock aluminum carabiner is standard on adjusters.
- Rope options (all have red core for inspection).

## 16 STRAND POLYESTER ARBORIST ROPE

16 strand polyester rope is an excellent choice due to its no snagging, abrasion-resistant construction and excellent energy absorption characteristics.

## PARALLEL CORE POLYESTER

Parallel-core polyester filament bonded together with a rubber based adhesive, wrapped with red rubber tape to act as a wear indicator, and over-braided with a tough polyester sleeve.

## TECHNORA OVER-BRAIDED KERNMANTLE ROPE

TECHNORA rope is engineered with superior durability and ease of inspection in mind. The modified "TECHNORA" over-braid is designed to maximize cut and abrasion resistance. Inside, you'll find a modified Kernmantle construction. The red polyester sub-sleeve is easily identifiable if the rope becomes compromised due to wear and tear. If the red damage indicator is exposed, just remember - "Red-Is-No-Go!"



## ADJUSTOR CHOICES

- 4016 Style-standard or straight cam
- 4019 Style-90 degree twist cam



## ROPE CONSTRUCTION (ALL HAVE RED CORES FOR INSPECTION)

- Braided rope with PVC cover (NX) **(A)**
- Braided rope with Ballistic nylon/rope roller (NXBC) **(B)**
- Parallel Core **(C)**
- Technora Over-Braided Kernmantle **(D)**



## SNAPHOOKS

- Standard steel **(1)**
- Steel swivel snaphook (SW) **(2)**
- Aluminum alloy (AL) **(3)**



### WARNING:

Verify connections and red wear indicator.

USE YOUR PHONE TO SCAN THE QR CODE FOR MORE INFO!





# POLE STRAPS



51N-2HL

## 50 SERIES



The 6 ply 1 3/4" neoprene coated nylon material uses a tongue buckle adjustment, and has a red wear indicator.

Part No.	Length		Wt:
No. 51N-2HL	5'6"	Pole strap	3.75 lb.
No. 52N-2HL	6'	Pole strap	3.75 lb.
No. 53N-2HL	6'6"	Pole strap	4.0 lb.
No. 54N-2HL	7'	Pole strap	4.0 lb.



78XX-2HL

## 78 SERIES



Bashlin's pliable latigo leather straps feature a nylon insert. The stitching is deeply embedded in the leather for longer wear.

Part No.	Length		Wt:
No. 78XX-2HL	5'6"	Pole strap	4.25 lb.
No. 78AX-2HL	6'	Pole strap	4.25 lb.
No. 78BX-2HL	6'6"	Pole strap	4.5 lb.
No. 78CX-2HL	7'	Pole strap	4.5 lb.

**WARNING:** Always visually confirm that the snap is on the D-Ring with the gate closed and locked before allowing the strap to support your body weight. Do not just listen for the "click".



47N-15

## EXTENSION STRAPS



Bashlin's extension straps are made from 6 ply nylon and forged steel hardware. The available lengths are 15" and 18".

Part No.	Length		Wt:
No. 47N-15	15"	Extension strap	1.0 lb.
No. 47N-18	18"	Extension strap	1.0 lb.



41NW-2HL

## 40NW SERIES

The orange woven nylon is soft, pliable, and has a red wear indicator in the center. Adjustment is made with a forged steel friction adjuster.

Part No.	Length		Wt:
No. 41NW-2HL	5'6"	Pole strap	3.5 lb.
No. 42NW-2HL	6'	Pole strap	3.5 lb.
No. 43NW-2HL	6'6"	Pole strap	4.0 lb.
No. 44NW-2HL	7'	Pole strap	4.0 lb.

**WARNING:** Double action locking snaphooks reduce, but do not eliminate, the possibility of accidental disengagement. Caution and proper work methods including keeping the Snap/D-Ring area free from foreign objects must be practiced at all times. Disabling the gate locks may cause accidents, injury, or death.

**WARNING:** The 40 and 50 series straps have red wear indicators in the center to help determine when it is time to replace them.

# HAND TOOLS



## RAUCKMAN'S BUG WRENCHES

**RAUCKMAN™**  
Utility Products

- See through port to confirm that the ends are separated.

<b>No. BW221</b>	3/8" - 9/16"	Wt: 0.75 lb.
<b>No. BW2212*</b>	1/2" - 9/16"	Wt: 0.75 lb.
<b>No. BW223</b>	Stamped metal, insulating handle, 9/16" and 3/4"	Wt: 0.75 lb.
<b>No. BW223HD</b>	Heavy-duty, drop-forged, insulating handle, 9/16" and 3/4"	Wt: 0.75 lb.
<b>No. BW2237*</b>	5/8" - 3/4"	Wt: 0.75 lb.
<b>No. BW224*</b>	3/4" - 7/8"	Wt: 0.75 lb.
<b>No. BW244</b>	Heavy-duty, 4-in 1, drop-forged, insulating handle, reversing ratchet, 5/8" and 1/2" - 9/16" and 3/4"	Wt: 0.75 lb.

\*Not shown



## KLEIN ADJUSTABLE WRENCHES

- Heavy duty wrenches are made of steel alloy.
- Feature an extra capacity design.
- Plastic dipped handles.

<b>No. D507-8</b>	8" length and 1 1/8" capacity	Wt: 1.0 lb.
<b>No. D507-10</b>	10" length and 1 5/16" capacity	Wt: 1.0 lb.
<b>No. D507-12</b>	12" length and 1 1/2" capacity	Wt: 1.5 lb.



## LOWELL LINEMEN'S WRENCHES

- Square socket fits 3/4", 1", 1 1/8".
- Hex end fits 9/16", 3/4", and 5/8" square nuts.
- Reversing lever at head.
- Bolt-thru design.

<b>No. 100TDE</b>	8 1/4" ergo grip	Wt: 1.5 lb.
<b>No. 101TDE</b>	9 1/4" steel handle	Wt: 2.0 lb.
<b>No. 103TDE</b>	12 1/4" steel handle	Wt: 2.25 lb.

### TRIPLE SQUARE

- 3/4", 1", 1-1/8"

<b>No. 150-12</b>	12" steel handle	Wt: 2.5 lb.
-------------------	------------------	-------------

### QUAD WRENCH

- 3/4", 13/16", 1", 1 1/8"

<b>No. 8D</b>	12" ergo handle	Wt: 1.5 lb.
---------------	-----------------	-------------

Bashlin offers the complete line of Lowell products. Contact us for more information.



## KLEIN "BELL" LINEMEN'S WRENCH

<b>No. 3146</b>	5/8" hardware	Wt: 2.0 lb.
-----------------	---------------	-------------

# HAND TOOLS



D213-9NE



D2000-9NEH



420G



430G

## LINEMEN'S PLIERS

- Made in the U.S.A.
- Designed for professional use.
- Plastic dipped handles.

**No. D213-9NE** Klein's most popular (9") Wt: 1.25 lb.  
**No. D2000-9NE** Klein hardened jaws (9") Wt: 1.25 lb.  
**No. D2000-9NEH** Klein with 5/8" thread cleaners Wt: 1.25 lb.

## ADJUSTABLE PLIERS

- The original Channellock® plier.
- Made in the exact same standards that earned it a quality reputation.

**No. 420G** 9 1/2" with coated handles Wt: 1.0 lb.  
**No. 430G** 10" with coated handles Wt: 1.0 lb.



BSK25



BSK30



BSK50

## LINEMEN'S SKINNING KNIVES

- Curved point skinning knives.

**No. BSK25** 9 1/4" OAL Wt: 0.5 lb.  
**No. BSK30** 10" OAL Wt: 0.5 lb.  
**No. BSK50** For shotgun stick, 10" OAL Wt: 0.5 lb.

## \*\* NEW \*\*



BSK22



BSK23



BSK52



BSK52 ON STICK

## COMFORT GRIP SKINNING KNIVES

**No. BSK22** 9 1/2" OAL Wt: 0.4 lb.  
**No. BSK23** Blunted Tip 9 1/2" OAL Wt: 0.4 lb.  
**No. BSK52** Blunted Tip For shotgun and hot stick 11 1/2" OAL Wt: 0.5 lb.



1550-4



44005

## KLEIN FOLDING LINEMEN'S KNIFE

- 2.5" hardened locking blades.

**No. 1550-4** Wood grain plastic with ring Wt: 1.0 lb.  
**No. 44005** Impact-resistant handle with rubber insert Wt: 0.5 lb.

# HAND TOOLS



## HAMMERS

<b>No. B6232</b>	Vaughn line hammer	Wt: 2.0 lb.
<b>No. B832</b>	Klein claw hammer	Wt: 2.5 lb.
<b>No. B809</b>	Klein double face hammer	Wt: 2.5 lb.
<b>No. B832-26</b>	Klein waffle hammer	Wt: 2.5 lb.



## KLEIN SCREWDRIVERS

- Features a square shank, keystone tip, cushion grip.


<b>No. 600-4</b>	8 11/32" OAL, 1/4" tip width and 4" shank	Wt: 0.4 lb.
<b>No. 600-6</b>	10 15/16" OAL, 5/16" tip width and 6" shank	Wt: 0.5 lb.
<b>No. 600-8</b>	13 7/16" OAL, 3/8" tip width and 8" shank	Wt: 0.6 lb.
<b>No. 600-12</b>	17 7/16" OAL, 1/2" tip width and 12" shank	Wt: 1.0 lb.
<b>No. 602-7DD</b>	7" round shank demo driver	Wt: 0.5 lb.



## STAPLE STICKS

- Makes driving staples safer and more efficient.
- Simply load 12 staples ahead of time and hammer them through when needed.
- There is no fumbling, and the risk of a glove puncture is minimized.

<b>No. BSS2000</b>	Staple stick for 3/4" staples	Wt: 0.5 lb.
<b>No. BSS2001</b>	Staple stick for 1" staples	Wt: 0.5 lb.

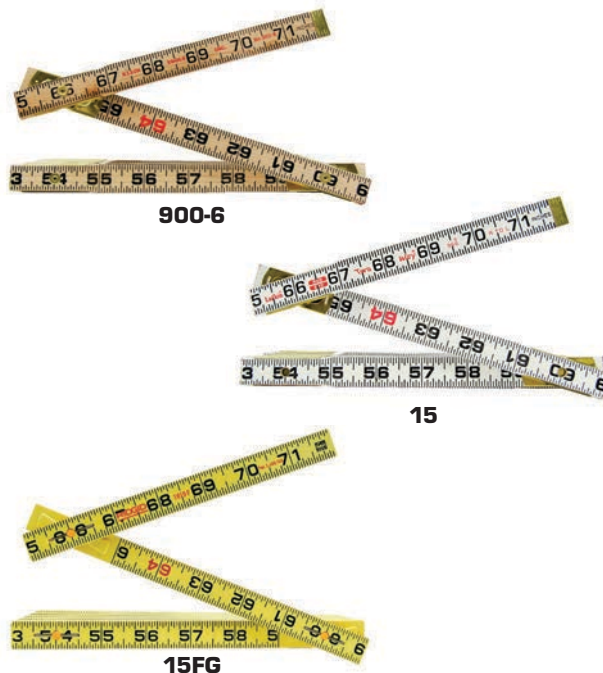

## FOLDING RULES

- Features either an inside read or an outside read.

<b>No. 900-6</b>	Klein 6' inside read wood	Wt: 0.3 lb.
<b>No. 15</b>	Lufkin 6' dual read wood	Wt: 0.3 lb.
<b>No. 15FG</b>	Rigid 6' inside read fiberglass	Wt: 0.3 lb.

# EQUIPMENT INSPECTION

Bashlin's Climbing Equipment is to be inspected before each use. If in the course of your inspection any of your tools are found to be defective, they must be removed from service immediately. Follow your company procedures for replacement. If there are any questions, please contact us. Properly maintaining your equipment is an investment in your well-being.



## HOW TO INSPECT YOUR EQUIPMENT

Here are the components of your equipment that need to be carefully inspected. Remove any product from service that has any of the following conditions.

### TOOL BELTS

(ESTIMATED SERVICE LIFE 5-8 YEARS)

- (A)** Hardware-electrical burns, cracks, deformation, loose attachment points.
- (B)** Sewing-loose, cut, broken or frayed stitches.
- (C)** Leather or Nylon material-Abrasion, fraying, cracking, cuts or chemical deterioration.
- (D)** Rivets-loose or bent rivets.
- (E)** Tool loops-holsters-bug bags-elongated loops, loose attachments, cut straps, worn bag bottoms.
- (F)** Belt tongue-broken stitches, elongated holes, worn or abraded material.

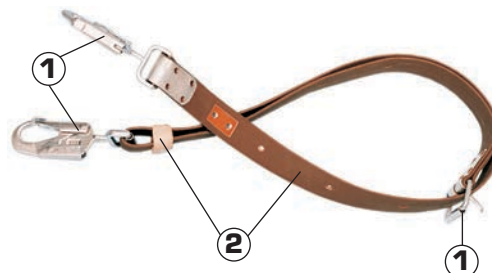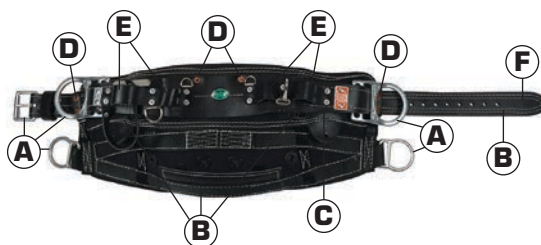

### FALL RESTRAINTS/POLE STRAPS/ SECONDARY LANYARDS

(ESTIMATED SERVICE LIFE 1 - 4 YEARS)

- (1)** Hardware-electrical burns, cracks, bends, deformation, loose attachment, improper latch movement and gate spring tension, sticking adjuster cams or carabiner gates, loose set screws.
- (2)** Nylon, leather or rope-abrasion that exposes red wear indicator, cuts, fraying, broken stitches, chemical damage.



### CLIMBERS

(ESTIMATED SERVICE LIFE IS WHEN 2ND SET OF GAFFS HAVE WORN OUT)

- (A)** Straps and pads-cuts, extreme abrasion, elongated holes, loose attachment points, chemical damage.
- (B)** Shank-electrical burns, cracks, deformation, worn stirrup (thinning), improper slide adjustment. Careful inspection is required to the "critical" portion of the climber shank, 4-8" above the gaff attachment point. Scratches and cuts in this section may cause stress risers, accelerate wear and allow the shank to fail prematurely.
- (C)** Gaffs-loose attachment, electrical burns, and incorrect shape. See Bashlin Information booklet BLCL514 for gaff shaping information, or go to [www.bashlin.com](http://www.bashlin.com) and see the gaff shaping video.



Additional detailed information is available by request or online or see page 106.

**NOTES:**

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....



**"SUPERIOR PRODUCTS  
REQUIRE VISION AND  
SKILLED HANDS."**

-W.M. BASHLIN, 1926

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....





**BASHLIN**  
INDUSTRIES INC  
UP, DOWN / ALL AROUND INNOVATION

## FALL PROTECTION AND RESCUE EQUIPMENT FOR LINEMEN AND GENERAL INDUSTRY

**Bashlin Industries, Inc.** offers field proven products and innovative engineered solutions for all your fall protection needs. Our products meet the ASTM, ANSI and OSHA requirements, including Arc Flash resistant harnesses and lanyards. In fact, we were one of the first companies to participate in the testing leading to the current ASTM Arc Flash standards.

# FALL PROTECTION EQUIPMENT GENERAL INFORMATION

## BASIC COMPONENTS OF FALL PROTECTION EQUIPMENT:

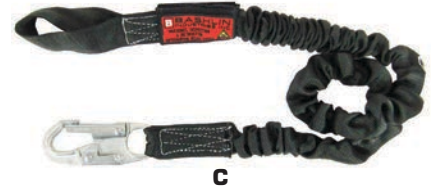

### A. ANCHORAGE/ANCHORAGE CONNECTORS:

A secure point that will endure the force of arresting a worker's fall. In most situations OSHA requires a strength rating of 5,000 lb. or more for a single worker's anchorage.

**B. HARNESS:** A device made of webbing, buckles, and D-Rings designed to hold the worker securely, distribute arresting forces, and provide a point to attach a lanyard connecting the individual to an anchorage.

**C. LANYARD:** A web product connecting the worker to the anchorage. It must include a shock absorbing device for fall arrest applications.

**D. CONNECTING DEVICES:** Snaphooks, carabiners, and D-Rings that link the various components of the personal fall protection equipment.

## FALL PROTECTION EQUIPMENT CRITERIA

Bashlin expands on these basic ideas for the specific desires of our customers. The big question is, what do you need? Here are some things to consider:

### ANCHORAGE/ANCHORAGE CONNECTORS:

- Does it have the required strength?
- Can it be easily accessed? Will the lanyards and fall lines remain clear of tangles and damaging edges?
- Are the connections and combinations of the hardware compatible to reduce the possibility of accidental disengagement or damage in an arrested fall?
- Are the connections close and as directly above the user as possible, and high enough to keep the worker from striking a lower level during an arrested fall?

### LANYARDS

- Are the lanyards as short as possible (6' maximum)?
- Does the free-fall distance comply with OSHA requirements?
- Do the connections to the anchorage and harness comply with industry standards?
- Is a shock absorber required or necessary?

### HARNESSES

- What are the OSHA requirements for the work situation?
- Does the work require positioning capabilities or only fall arrest?
- Can or will the fall protection equipment be used to aid in the rescue of a worker?

## INSPECT BEFORE EACH USE.



# PROPER USE AND CARE OF HARNESSES

- Read, understand, and follow all instructional material included with or attached to these products.
- Do not use these products without proper training.
- Check that all buckle hardware and closures are aligned properly, are free from damage, and are functioning properly.
- Harness should be properly sized to the individual user. See page 43 for sizing chart.
- Adjust harness to obtain a “snug” fit by adjusting friction adjusters and buckles on shoulder and leg straps. When adjusted correctly the back attachment should be located between the shoulder blades of the user.
- Utilize elastic bands and plastic keepers to control excess webbing after adjustments are made.
- Avoid exposing safety harness to excessive heat, chemicals, and prolonged exposure to sunlight that can degrade the materials.

## CARING FOR YOUR HARNESS

Proper care for your harness is quick and easy by simply following these guidelines.

### CLEANING

“Hand Washing” is recommended using a mild laundry detergent. Rinse completely and hang to dry. Product can also be machine washed in a mesh bag on the gentle cycle. **DO NOT** machine dry.

### STORAGE

Store Harness in a ventilated area protected from moisture, heat, chemicals, and UV Light. Bashlin’s 10HBT harness bag is a great storage option.



10HBT



USE YOUR PHONE TO SCAN THE QR CODE FOR MORE INFO!



Lanyard Parking Tab

<small>BASHLIN 1541-001 Rev. A</small> <b>ANSI Z359.11-2021</b> ANSI Z359 Recognizes the use of this harness only within the capacity range of: 130-310 lbs.		
<small>BASHLIN 1541-001 Rev. A</small> <b>Inspection Record</b> NAME: _____ ID: _____ DATE: _____ TIME: _____ INSPECTOR: _____ (Grid for recording inspection results)	<small>BASHLIN 1541-001 Rev. A</small> <b>WARNING</b> AVOID SHARP EDGES, ABRASIVE SURFACES, EXPOSURE TO ACIDS AND PROLONGED SUNLIGHT. PARK HANGERS ONLY ON LANYARD PARKING POINT OF HARNESS. LIMIT FREE FALL DISTANCE TO THE LENGTH OF THE LANYARD OR 6 FEET WHICHEVER IS LESS. ALLOW FOR A MINIMUM EXTENSION OF 4 FT. OVER THE STATED LENGTH OF THE LANYARD.	<small>BASHLIN INDUSTRIES INC.</small> 270 BOX 807 118 WEST FINE ST GROUND CITY, MO 64601 WWW.BASHLIN.COM



NYLON HARNESS EXPOSED TO ARC FLASH



UNDAMAGED UNDERSIDE OF SAME WEBBING

## INSPECTION

- Inspect before use.
- All tagging and labeling must be present and legible.
- Hardware should be free from electrical contact marks, cracks, deformities, corrosion, and must function properly.
- Webbing shall not have cuts, burns, broken stitching, excessive abrasion or chemical degradation.
- “Visual indicators” are intact and have not been deployed.

If any of the above issues are detected, remove product from service immediately.

USE YOUR PHONE TO SCAN THE QR CODE FOR MORE INFO!



**BASHLIN HARNESSSES** are available in the X or H design. The X (683) models are sized. The H (662) are one size fits most.

**BASHLIN HARNESSSES AND LANYARDS ARE ASTM ARC FLASH COMPLIANT AND THIRD PARTY TESTED.**



**BASHLIN'S NON-CONDUCTIVE BUCKLES, ADJUSTORS AND SNAPHOOKS ARE RATED AT 9KV.**

**X-STYLE & H-STYLE**

BACK ATTACHMENT OPTIONS



DIELECTRIC D-RING (D1)



ALUMINUM D-RING (D2)



STANDARD D-RING (D)



NYLON WEB LOOP (A)



2' NYLON LOOP EXTENSION (B)  
No. 1900



2' SMALL D-RING EXTENSION (C)  
No. 1991



6' NYLON WEB LOOP WITH SMALL D-RING (C6)

**OPTIONS AVAILABLE (NOT PICTURED):**

- LW06B:** 6' with B-LAN shock absorber
- LWA6B:** 6' adjustable with B-LAN shock absorber
- L2805-4HL:** 4' or 6' (6HL) polyester core/tubular web shock absorber

# ARC FLASH HARNESS OPTIONS

## X-STYLE

## H-STYLE



### HOW TO CORRECTLY CHOOSE BODY HARNESS OPTIONS:

- Choose a base harness style (ex.: **683X**)
- Choose a back attachment(s) (ex.: **683XA**)
- Choose other harness options (ex.: **683XAP**)
- Choose a size (ex.: **683XAP-L**)



SHOULDER D-RINGS (S)



DIELECTRIC BUCKLES (DEQ)



SHOULDER PADS (N)



NYLON WEB LOOPS ON SHOULDERS (T)



SHOULDER/BACK PAD COMBO (X)



QUICK RELEASE BUCKLES (Q) (PREFIX)



REFLECTIVE MATERIAL ON WEBBING (G)



656 SERIES POSITIONING BELT (D-SIZE REQUIRED) (P)



LEATHER BUCKLE PAD (F)



NEOPRENE BUCKLE PADS (G)



COATED HARDWARE (E)



RESCUE LOOPS ON CHEST (R)



REStEP SUSPENSION TRAUMA DEVICE (R2)


### SIZING CHART - BASED ON HEIGHT AND CHEST SIZE

#### X-STYLE 683 AND H-STYLE 662H-662V-664A-664T

SIZE		HEIGHT	CHEST
S	Small	5' 4" - 5' 7"	36 in.
M	Medium	5' 8" - 5' 11"	40 in.
L	Large	6' 0" - 6' 3"	44 in.
X	X-Large	6' 3" - 6' 6"	48 in.
2XL	XX-Large	6' 6" +	52 in.
3XL	XXX-Large	6' 6" +	56 in.

#### H STYLE HARNESSES-662R AND 662A

SIZE		HEIGHT	CHEST
0	One Size Fits Most	5' 4" - 6' 3"	48 in.
X	X-Large	6' 3" - 6' 6"	54 in.
2X	XX-Large	6' 6" - 6' 10"	60 in.

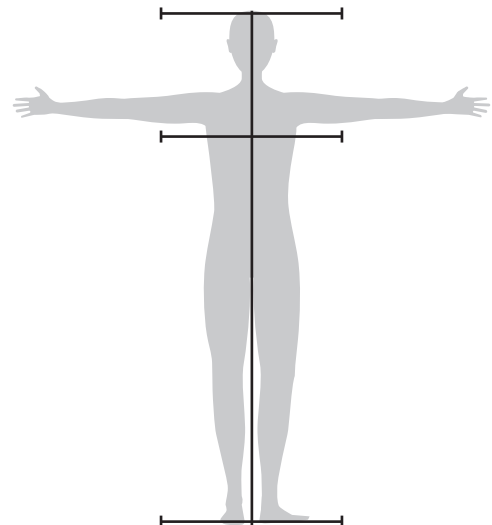

# AERIAL LIFT AND GENERAL USE ARC FLASH HARNESSES

## 683 "X" STYLE SERIES

The 683 "X" is Bashlin's premier body harness. Originally designed for the utility industry, this harness sets the standard for comfort, flexibility and ease of use. The hardware is low on the waist, and a loop is in the front for rescue or work positioning. Available with pass through friction buckles or quick release buckles. [Size required, see page 43.](#)

 **BASHLIN'S HARNESSES MEET ASTM F887 ARC-FLASH REQUIREMENTS AND ARE 3RD PARTY CERTIFIED**



683XD

### "X" HARNESS WITH D-RING BACK ATTACHMENT

- X-Style full body harness.
- 3" D-Ring.

<b>No. 683XD</b>	Pass through buckles	Wt. 4.0 lb.
<b>No. 683GD</b>	Grommet leg straps	Wt. 4.5 lb.



683XC

### "X" HARNESS WITH 24" EXTENSION BACK ATTACHMENT

- X-Style full body harness.
- Pass through buckles.
- Available with or without 2" D-Ring.
- Use only with lanyards that are 4' or less.

<b>No. 683XB</b>	24" extension with nylon loop	Wt. 4.5 lb.
<b>No. 683XC</b>	24" extension with D-Ring	Wt. 4.5 lb.



683XA

### "X" HARNESS WITH NYLON LOOP BACK ATTACHMENT

- X-Style full body harness.
- 3" nylon loop for lanyard attachment.

<b>No. 683XA</b>	Pass through buckles	Wt. 4.0 lb.
<b>No. 683GA</b>	Grommet leg straps with pass through buckles	Wt. 4.5 lb.



Shown with additional options BQ683XA

### "X" HARNESS B683X BLACK OUT SERIES

- X-Style full body harness.
- Black webbing with orange stitching.

<b>No. B683XA</b>	With nylon loop	Wt. 4.5 lb.
<b>No. B683XD</b>	With D-Ring	Wt. 4.5 lb.

# AERIAL LIFT AND GENERAL USE ARC FLASH HARNESSSES

## 662 "H" STYLE SERIES



The 662 Series is a fully adjustable, one size fits most full body harness, in the "H" style. This harness also has a dorsal seat strap and 8,500 lb. test web. [Size required, see page 43.](#)



662RD

### "H" HARNESS WITH D-RING BACK ATTACHMENT

- H-Style full body harness.
- Pass through buckles.

<b>No. 662AD</b>	Moveable chest strap	Wt. 4.0 lb.
<b>No. 662RD</b>	Fixed chest strap	Wt. 4.0 lb.
<b>No. 662GD</b>	Moveable chest strap and grommet legs	Wt. 4.5 lb.



Shown with additional options BQ662A

### "H" HARNESS B662A BLACK OUT SERIES

- 662 H-Style harness in black webbing and orange stitching.
- Moveable chest strap with pass through buckles.
- Size required, see page 43.

<b>No. B662AA</b>	With nylon loop	Wt. 4.5 lb.
<b>No. B662AD</b>	With D-Ring	Wt. 4.5 lb.



662AC

### "H" HARNESS WITH 24" EXTENSION BACK ATTACHMENT

- H-Style full body harness.
- Pass through buckles.
- Available with or without 2" D-Ring.
- Use only with lanyards that are 4' or less.

<b>No. 662AB</b>	With loop end	Wt. 4.5 lb.
<b>No. 662AC</b>	With D-Ring	Wt. 4.5 lb.



662RA

### "H" HARNESS WITH NYLON LOOP BACK ATTACHMENT

- H-Style full body harness.
- 3" nylon web loop.

<b>No. 662AA</b>	Moveable chest strap	Wt. 4.5 lb.
<b>No. 662RA</b>	Fixed chest strap	Wt. 4.0 lb.
<b>No. 662GA</b>	Moveable chest strap and grommet legs	Wt. 4.5 lb.



## DID YOU KNOW?

QUICK RELEASE BUCKLES ARE AVAILABLE ON ALL BASHLIN HARNESSSES (Q).

# AERIAL LIFT AND GENERAL USE ARC FLASH HARNESSES



662VA

## "H" HARNESS 662VA

- H-Style full body harness with a nylon "A" loop or D-Ring back attachment.
- Hook-N-Loop chest closure with pass through friction buckles.
- Sized as an X-Style harness (S-2X). See page 43.

<b>No. 662VA</b>	Pass through buckles with nylon loop	Wt. 4.0 lb.
<b>No. 662VD</b>	Pass through buckles with D-Ring	Wt. 4.0 lb.



## NOTES:

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

# DIELECTRIC HARNESSSES



Bashlin's X-Style and H-Style harnesses are available with dielectric buckles and snap hooks constructed with nylon molded over heat treated alloy steel to produce a minimum rating of 9kV. Lanyards are also available. [Size required, see page 43.](#)



**DEQ683XA**



**DEQ662HA**

## "X" DIELECTRIC HARNESS

- Quick release buckles.
- Available with nylon "A" loop or dielectric D-Ring.
- Size required, see page 43.

**No. DEQ683XA** Nylon web loop Wt. 3.5 lb.  
**No. DEQ683XD1** Dielectric D-Ring Wt. 4.5 lb.

## "H" DIELECTRIC HARNESS

- Quick release buckles.
- Available with nylon "A" loop or dielectric D-Ring.
- Size required, see page 43.

**No. DEQ662HA** Nylon web loop Wt. 4.0 lb.  
**No. DEQ662HD1** Dielectric D-Ring Wt. 4.5 lb.



**DEQ664A**

## "H" DIELECTRIC HARNESS

- Quick release buckles.
- Available with nylon "A" loop or dielectric D-Ring.
- Rapid adjusters on shoulders.
- Size required, see page 43.

**No. DEQ664A** Dielectric D-Ring Wt. 4.5 lb.





# Q664T H STYLE CLIMBING HARNESS

**BASHLIN HARNESSES  
AND LANYARDS ARE  
ARC FLASH COMPLIANT  
AND MANUFACTURED  
IN ACCORDANCE TO  
THE APPROPRIATE  
OSHA, ASTM AND ANSI  
STANDARDS**



- Integrated 4 D-ring padded in-line climbing belt with lightweight aluminum D-rings for comfort and support.
- Moveable chest strap.
- Available with nylon "A" loop, steel D-ring, dielectric D-ring, or 24" extension for back attachment.
- Quick Connect buckles on chest and leg straps.
- Rapid adjuster on chest.
- Rescue loops on hips.
- Black webbing with orange stitching.

**No. Q664T-Size** Climbing Harness

Wt. 8.0 lb.

## SIZE CHART

Small	D18-D21	Medium	D22-D25
Large	D26-D28	X-Large	D29-D32



**USE YOUR PHONE TO SCAN THE QR CODE FOR MORE INFO!**



# CLIMBING, SUBSTATION, AND TOWER HARNESSSES



Shown with additional options Q662ZACGR2X.

## Q662ZA SERIES: ZEUS "H" STYLE ARC FLASH FULL BODY HARNESS

- At just 7.5 lbs. this full body H-Style harness has an integral stacked 4 D-Ring belt with aluminum D-Rings, quick release buckles, and moisture wicking pad.
- Rescue loops on chest.
- Sizes as follows: Small (S) D18-21; Medium (M) D22-25; Large (L) D26-28; X-Large (X) D29-32.

**No. Q662ZA** Quick release buckles with nylon loop Wt. 7.5 lb.

### CALL US TO PLACE AN ORDER WITH ANY OF THE ADDITIONAL OPTIONS AVAILABLE:

- (A)** Nylon loop dorsal attachment
- (C)** 2' Extension
- (D2)** Aluminum D-Ring
- (G)** Neoprene buckle pads
- (R2)** RESTEP Suspension Trauma Straps
- (X)** Mesh shoulder/back pad



10HBT

## HARNESS BAGS

- Store and protect your body harness from most mechanical, chemical and UV damage in this high visibility orange canvas bag.

**No. 10HBT** Harness bag Wt. 1.0 lb.



683XAP

Shown with "X" Pad.



## 683 "X" STYLE CLIMBING HARNESS

- Available with 656CM tool belt.
- Belt easily removed from harness.
- Front attachment point for work positioning on ladders or rescue.
- Size both harness and tool belt "D" size.

<b>No. 683XDP</b>	With 3" D-Ring	Wt. 8.0 lb.
<b>No. 683XAP</b>	With nylon loop	Wt. 8.0 lb.
<b>No. 683XBP</b>	With 24" loop extension	Wt. 8.0 lb.
<b>No. 683XCP</b>	With 24" D-Ring extension	Wt. 8.0 lb.



FE683EZWTR

## FE683EZWTR TOWER HARNESS

- 683 X-Style harness with Steel D-Ring.
- Extra support and comfort EZ-Rider belt.
- Size both harness and tool belt "D" size.

**No. FE683EZWTR** Quick release buckles Wt. 11.0 lb.

## DID YOU KNOW?

QUICK RELEASE BUCKLES ARE AVAILABLE ON ALL BASHLIN HARNESSSES (Q).

# HARNESSES FOR CONFINED SPACE, RESCUE



**BEDQ683XD1**



**683XDT**



## BEDQ683XD1 "X" STYLE HARNESS

- Dielectric D-Ring with 18" nylon loop choked into D-Ring.
- Four "A" loops with reflexite (two on shoulders and two on hips).
- Leather buckle pads.
- Size required, see page 43.

**No. BEDQ683XD1** X-Style harness

Wt. 4.5 lb.

## CONFINED SPACE HARNESS

- Bashlin standard 683X and 662 H-Style harnesses for confined space entry are available with specialty options such as shoulder loops, hip loops, and high visibility material on webbing.
- Available in X-Style or H-Style.
- Pass through buckles standard.

**No. 683XDT**

D-Ring, nylon shoulder loops

Wt. 4.0 lb.

**No. 662ACS**

24" D-extension and shoulder D-Rings

Wt. 5.0 lb.



**BED662VDEF**



## BED662VDEF "H" STYLE HARNESS

- Dielectric D-Ring with 18" nylon loop choked into D-Ring.
- Four "A" loops with reflexite (two on shoulders and two on hips).
- Coated hardware.
- Leather buckle pads.
- Hook-N-Loop chest closure.
- Size required, see page 43.
- Use only with lanyards that are 4.5' or less.

**No. BED662VDEF** H-Style harness

Wt. 4.5 lb.



## 683X HARNESS OPTIONS (EX.):

**683X STYLE HARNESS (683XC6EQT) WITH 6" EXTENSION, SMALL D-RING, COATED HARDWARE, REFLEXITE, AND NYLON SHOULDER LOOPS.**

## DID YOU KNOW?

**QUICK RELEASE BUCKLES ARE AVAILABLE ON ALL BASHLIN HARNESSES (Q).**

# LANYARDS FOR AERIAL LIFT/ FALL PROTECTION



**BASHLIN'S LANYARDS MEET ASTM F887 ARC-FLASH REQUIREMENTS AND ARE 3RD PARTY CERTIFIED**



## No. 2005NWB-6HL

Shock absorbing lanyard – 1" nylon web with B-LAN, a SL6650A rope snaphook and a loop end.

Wt. 2.0 lb.

## 2000 SERIES B-LAN SHOCK ABSORBING LANYARDS

The B-LAN shock absorber pack reduces shock forces to the user by drawing the nylon web through a compressed steel tube (as a result of a fall event).

The maximum and standard length of the 2000 series lanyard is 6'. Shorter lengths are available on request.



## No. 2005NWB-6DE

1" nylon web with B-LAN, a non-conductive dielectric snaphook, and a loop end.

Wt. 1.75 lb.



## No. 2004NWB-6HL

Shock absorbing lanyard. 1" nylon web with B-LAN and two SL6650A rope snaphooks.

Wt. 2.5 lb.



## No. 2002NWB-6HL

Shock absorbing lanyard – 1" nylon web with B-LAN, a SL6650A rope snaphook and a 5395A large ladder snaphook.

Wt. 3.0 lb.

USE YOUR PHONE TO SCAN THE QR CODE FOR MORE INFO!



# LANYARDS FOR AERIAL LIFT/ FALL PROTECTION



**BASHLIN'S LANYARDS MEET ASTM F887 ARC-FLASH REQUIREMENTS AND ARE 3RD PARTY CERTIFIED**



## 2800 SERIES – POLYESTER SHOCK ABSORBING CORE

The 2800 series lanyards are constructed using tubular nylon web with a woven polyester core that absorbs forces as it expands in a fall event.

The maximum and standard length of the 2800 series lanyard is 6'. Shorter lengths are available on request.



### No. 2805-6DE

Shock absorbing lanyard – tubular nylon web with polyester shock absorbing core, a non-conductive dielectric snaphook and a loop end.

Wt. 2.0 lb.



### No. 2815-6HL

Shock absorbing lanyard – tubular nylon web with polyester shock absorbing core, a SL6650A snaphook and a 3005A carabiner.

Wt. 2.0 lb.



### No. 2804-6HL

Shock absorbing lanyard – tubular nylon web with polyester shock absorbing core and two SL6650A snaphooks.

Wt. 2.5 lb.



### No. 2817-6HL

Shock absorbing lanyard – tubular nylon web with polyester shock absorbing core, a SL6650A snaphook and a 3005 carabiner.

Wt. 2.0 lb.



### No. 2805-6HL

Shock absorbing lanyard – tubular nylon web with polyester shock absorbing core, a SL6650A snaphook and a loop end.

Wt. 2.0 lb.



### No. 2802-6HL

Shock absorbing lanyard – tubular nylon web with polyester shock absorbing core, a SL6650A snaphook and a 5395A large snaphook.

Wt. 3.5 lb.

# LANYARDS FOR AERIAL LIFT/ FALL PROTECTION



 BASHLIN'S LANYARDS MEET ASTM F887 ARC-FLASH REQUIREMENTS AND ARE 3RD PARTY CERTIFIED

## 2300 SERIES-POLYESTER SHOCK ABSORBING CORE WITH "STRETCH"

The 2300 series lanyards are constructed using tubular nylon web with a woven polyester core that absorbs forces as it expands in a fall event. Elastic cord has been added to allow the lanyard to "stretch" and contract minimizing length while using. Standard length is 6'.



### No. 2317-6HL

Shock absorbing "stretch" lanyard – 2" tubular nylon web with polyester shock absorbing core, a SL6650A snaphook and a 3005 carabiner.

Wt. 2.0 lb.



### No. 2306-6HL

Shock absorbing "stretch" lanyard – 2" tubular nylon web with polyester shock absorbing core and two SL6650A snaphooks.

Wt. 2.5 lb.



### No. 2302-6HL

Shock absorbing "stretch" lanyard – 2" tubular nylon web with polyester shock absorbing core, a SL6650A snaphook and a 5395A large ladder hook.

Wt. 3.5 lb.



### No. 2305-6HL

Shock absorbing "stretch" lanyard – 2" tubular nylon web with polyester shock absorbing core, a SL6650A snap hook, and a loop end.

Wt. 2.0 lb.



### No. 2315-6HL

Shock absorbing "stretch" lanyard – 2" tubular nylon web with polyester shock absorbing core, a SL6650A snaphook and a 3005A carabiner.

Wt. 1.5 lb.



**WARNING:** Limiting the lanyard length to 6' will not ensure a free fall of 6' or less. The lanyard length, plus anchor point and work location together will determine the free fall distance.



## DID YOU KNOW?

### BASHLIN LANYARDS ARE AVAILABLE WITH THE FOLLOWING OPTIONS AND FEATURES:

- Forged steel snaphooks (SL6650A), steel carabiner (3005), aluminum carabiners (3005A), or large ladder snap (5395A).
- 1" nylon web, and 1" tubular web.
- Manufactured to ANSI, ASTM, and OSHA requirements.



## BN9327 SERIES SELF-RETRACTING LANYARDS WITH SHOCK ABSORBER PACK

Bashlin self-retracting lanyards are designed to be lightweight and comfortable. These lanyards are available with durable steel or lightweight aluminum snaphooks and carabiners.

- 6' working length.
- 3/4" Kevlar webbing.
- Certified to ANSI Z359.14 Standard for Self-Retracting Devices.
- Arc flash tested

**No. BN9327-6HL**

Steel snaphook and carabiner

Wt. 2.95 lb.

**No. BN9327-6AL**

Aluminum snaphook and carabiner

Wt. 2.30 lb.



**No. 662RD  
with No. BN9327-6HL**



**Q664TAX  
with BN9327-6AL**



**No. BN9327-6AL**

**No. BN9327-6HL**

**CONTACT US FOR  
MORE INFORMATION**

USE YOUR PHONE TO SCAN THE QR CODE FOR MORE INFO!



# 2-LEG LANYARDS FOR CLIMBING TOWERS



## B-LAN SERIES

The B-LAN shock absorber pack reduces fall arrest forces in a fall event by drawing the nylon web through a compressed steel tube.

## B-LAN STYLE - "Y" CLIMBING LANYARD



### No. 2027-6HL

Twin leg climbing lanyard with nylon loop, two large steel ladder snaphooks, and B-LAN shock absorber.

Wt. 5.0 lb.



### No. 2028-6HL

Twin leg climbing lanyard with steel rope snap, two large steel ladder hooks, and B-LAN shock absorber.

Wt. 5.0 lb.



### No. 2028-6AL

Twin leg climbing lanyard with aluminum rope snap, two large aluminum ladder snaphooks, and B-LAN shock absorber.

Wt. 5.0 lb.

**CAUTION:** Lanyards may be connected to D-Rings on harnesses (D) with web/rope loops, and properly dimensioned carabiners or snaphooks. Nylon back attachments, (C) require web/rope loops or properly dimensioned carabiners. Snaphooks are not to be used with (C) attachment points. See page 58.



HITCHING A LANYARD TO A HARNESS.



Large ladder snap hooks have a 2.5" opening.

# 2-LEG LANYARDS FOR CLIMBING TOWERS



## POLYESTER SHOCK ABSORBING CORE STYLE - "Y" CLIMBING LANYARD

The 2300/2800 series lanyards are constructed using tubular nylon web with a woven polyester core that absorbs forces as it expands in a fall event. Standard length is 6'



**No. 2328-6AL**

Twin leg tubular nylon "stretch" climbing lanyard with aluminum snap hook, two large aluminum ladder snaphooks, and shock absorbing core.

Wt. 5.0 lb.



**No. 2327-6HL**

Twin leg tubular nylon "stretch" climbing lanyard with nylon loop, two large steel ladder snaphooks, and shock absorbing core.

Wt. 5.0 lb.



**No. 2827-6HL**

Twin leg tubular nylon climbing lanyard with nylon loop, two large steel ladder snaphooks, and shock absorbing core.

Wt. 5.0 lb.



**No. 2827-6AL**

Twin leg tubular nylon climbing lanyard with nylon loop, two large aluminum ladder snaphooks, and shock absorbing core.

Wt. 4.5 lb.



**No. 2828-6HL**

Twin leg tubular nylon climbing lanyard with steel snap hook, two large steel ladder snaphooks, and shock absorbing core.

Wt. 5.0 lb.



**No. 2328-6HL**

Twin leg tubular nylon "stretch" climbing lanyard with steel snap hook, two large steel ladder snaphooks, and shock absorbing core.

Wt. 5.5 lb.



# POSITIONING LANYARDS



## 4000 SERIES – FIXED LENGTH POSITIONING LANYARDS

This series is designed for and mostly used in positioning applications. In certain situations they can be used for fall arrest, if they are used with a shock absorbing device and if all other applicable requirements are met.

The maximum and standard length of the 4000 series lanyard is 6'. Shorter lengths are available on request.



### No. 4005NW-6HL

1" nylon web with SL6650A rope snaphook and one loop end.

Wt. 2.0 lb.



### No. 4002NW-6HL

1" nylon web with SL6650A rope snaphook and 5395A large ladder snaphook on the ends.

Wt. 3.5 lb.



### No. 4017NW-6HL

1" nylon web with SL6650A rope snaphook and 3005 steel carabiner on the ends.

Wt. 2.5 lb.



### No. 4004NW-6HL

1" nylon web with SL6650A rope snaphooks on the ends.

Wt. 2.5 lb.




# PROPER USE AND CARE OF LANYARDS

**ALWAYS INSPECT  
YOUR EQUIPMENT  
BEFORE EACH USE!**



**A**




**C**



**D**



**D**

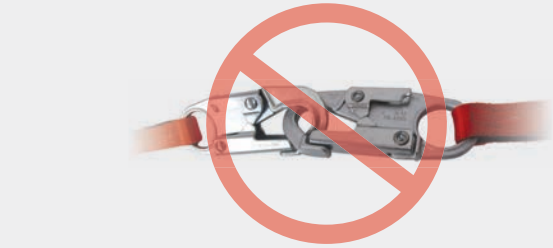


**E**



**F**



**G**



**D**



**H**

- Read, understand, and follow all instructional material included with or attached to these products. **(A)**
- Inspect before use.
- Make sure connector on end of lanyard is compatible with harness and anchor point and working properly. **(B)**
- Do not attach a snap hook directly into a nylon back attachment. **(C)** Use a locking carabiner or a lanyard that has loop at one end that can be “hitched” to the nylon loop. **(D)**

- Do not connect two lanyards together to make a lanyard as this will increase your free fall potential. **(E)**
- Do not use “knots” to shorten a lanyard as this will decrease the strength of the device by 30% or more. **(F)**
- Do not connect snap hook back into itself (boiler hitch). **(G)**
- Utilize parking tabs to store free end of lanyard to reduce tripping and entanglement hazards when walking. **(H)**
- Avoid dragging or allowing lanyards to lay on ground exposing it to chemical or mechanical damage.

## INSPECTION

- Inspect before use.
- All tagging and labeling must be present and legible.
- Hardware should be free from electrical contact marks, cracks, deformities, corrosion, and must function properly.
- Webbing shall not have cuts, burns, broken stitching, excessive abrasion, or chemical degradation.
- “Shock” Load indicators are intact and have not been deployed.

If any of the above issues are detected, remove product from service immediately.

## CARING FOR YOUR LANYARD

Proper care for your Lanyard is quick and easy by simply following these guidelines.

### CLEANING

“Hand Washing” is recommended using a mild laundry detergent. Rinse completely and hang to dry. Product can also be machine washed in a mesh bag on the gentle cycle. **DO NOT** machine dry.

### STORAGE

Store Lanyard in a ventilated area protected from moisture, heat, chemicals, and UV light.

# ANCHORAGES/CONNECTORS



## BOOM STRAPS



- 8,500 lb. test nylon web.
- Nylon pads.
- Corrosion resistant.
- Standard length is 55"

<b>No. 703</b>	Boom strap with friction buckle	Wt. 2.0 lb.
<b>No. 703R</b>	Boom strap with ratchet	Wt. 3.5 lb.
<b>No. 703R-2D</b>	2 D-Ring boom strap for overcenter lifts	Wt. 4.5 lb.

## NYLON ANCHOR STRAPS



- Rated at 5,000 lb.
- Standard 3' or 4' lengths.
- Longer lengths are available on request.

<b>No. 2011P-36</b>	36" anchor strap with hardware	Wt. 1.75 lb.
<b>No. 2011P-36G</b>	36" anchor strap with hardware and softener.	Wt. 2.0 lb.
<b>No. 2011P-48</b>	48" anchor strap with hardware	Wt. 1.75 lb.
<b>No. 2011P1-36</b>	36" anchor strap	Wt. 1.0 lb.
<b>No. 2011P1-48</b>	48" anchor strap	Wt. 1.0 lb.
<b>No. 2012P-36</b>	36" anchor strap	Wt. 0.7 lb.
<b>No. 2012P-48</b>	48" anchor strap	Wt. 0.7 lb.

**WARNING:** Bashlin boom straps, even those with 2 D-Rings are for one worker only. Each worker must have his/her own individual anchorage.

**CAUTION:** Nylon anchor straps require padding for protection over sharp edges.

# HARDWARE/DESCENT DEVICES

## CARABINERS



These are convenient connectors for many applications. Only triple locking carabiners are to be used for fall protection. Bashlin's carabiners are rated at a minimum of 5000 lb. (\*OAL is overall length).



## TRIPLE LOCK DESIGN FOR FALL PROTECTION SYSTEMS



- No. 3006** Steel 5" OAL with 1" gate opening Wt. 1.0 lb
- No. 3007A** Aluminum 4 7/8" OAL with 7/8" gate opening Wt. 0.3 lb.
- No. 3008A** Aluminum 4 7/8" OAL with 7/8" gate opening Wt. 0.3 lb.



## TWIST LOCK AND SCREW LOCK CARABINERS

- For rescue and material handling.

- No. 3006K** Steel twist lock 5" OAL with 1" opening Wt. 0.9 lb.
- No. 3004** Steel screw lock 5" OAL with 1 1/4" opening Wt. 1.1 lb.



**SL6650A**

## ROPE SNAPHOOKS



- Forged steel rated at a minimum of 5000 lb. and meeting the OSHA and ANSI standards.

- No. SL6650A** 5 9/16" OAL 3/4" gate opening Wt. 0.5 lb.



**5395A**

## LARGE SNAPHOOKS



- Forged steel rated at a minimum of 5000 lb. and meeting the OSHA and ANSI standards.

- No. 5395A** 9" OAL 2 1/2" gate opening Wt. 2.0 lb.



**DSD30**

## ROPE DESCENT DEVICES

- No. DSD30** Skylotec double stop descender 11mm 7/16" static lines Wt. 2.1 lb.



**WARNING:** This equipment is to be used by trained personnel only.

# PROPER USE AND CARE OF ANCHORAGE CONNECTORS

- Inspect before use.
- Always place the anchor point as high as possible to reduce free fall distance and the chance that the worker could impact a lower level should a fall event occur.
- **DO NOT** use nylon web anchor slings around structures or objects with sharp edges unless softeners are used to protect the sling from sharp edges.

## INSPECTION

- Inspect before use.
- All tagging and labeling must be present and legible.
- Hardware should be free from electrical contact marks, cracks, deformities, corrosion, and must function properly.
- Webbing shall not have cuts, burns, broken stitching, excessive abrasion, or chemical degradation.

**If any of the above issues are detected, remove product from service immediately.**

## CARING FOR YOUR NYLON ANCHORAGE

Proper care for your Nylon Anchorage is quick and easy by simply following these guidelines.

### CLEANING

“Hand Washing” is recommended using a mild laundry detergent. Rinse completely and hang to dry. Product can also be machine washed in a mesh bag on the gentle cycle. **DO NOT** machine dry.

### STORAGE

Store Nylon Anchor in a ventilated area protected from moisture, heat, chemicals, and UV light.

**NOTES:** .....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

# REST SERIES: RELIEF FOR SUSPENSION TRAUMA



**ReST**

## REST - SUSPENSION TRAUMA DEVICE

- Designed to mitigate the debilitating and potentially fatal effects of suspension trauma.
- Ladder secures to the back attachment of the worker's harness for easy access and deployment.
- Easily deploys by pulling on yellow rung.

**No. ReST**      Suspension trauma ladder      **Wt. 0.7 lb.**



**ReST-SR**

## REST SR - SUSPENSION TRAUMA RELIEF LADDER

- Self-deploying relief system.
- Ladder can provide the worker a means for either self-rescue, or at the very least a place to relieve the pressure on the leg as a result of hanging in the harness for an extended period of time after a fall event.
- Adjustable for use on 4' - 6' lanyards.
- Can be used on most lanyards.

**No. ReST-SR**      Self-rescue ladder      **Wt. 1.2 lb.**



**ReSTEP**



## RESTEP SUSPENSION TRAUMA DEVICE

- Simple and easy device designed to help minimize and alleviate the damaging and potentially fatal effects of suspension trauma when a worker is exposed to a fall event and left suspended in a upright position.
- Easily attaches to most harnesses.

**No. RESTEP**      Suspension trauma device      **Wt. 0.5 lb.**

USE YOUR PHONE TO SCAN THE QR CODE FOR MORE INFO!



# RESCUE EQUIPMENT



700FP



700FWI



700FWI (OPEN)

## RESCUING INJURED WORKERS FROM AERIAL LIFT DEVICES

- Designed for use in aerial lift devices.
- 700FP attaches semi-permanently to the boom with a ratcheting boom strap.
- 700FWI is stored in a canister mounted directly on the truck body.
- Units feature corrosion resistant blocks with nylon sheaves and 75' of twisted rope. Other rope lengths are available on request.
- A carabiner is provided for attachment to the victim.
- Proper training is required to use these items.

 Video is available on our website or scan the QR code



<b>No. 700FP</b>	Boom mount rescue pack	Wt. 8.0 lb.
<b>No. 700FWI</b>	Truck mount rescue pack	Wt. 14.0 lb.



## WRISTLETS

- Quick and easy way to move an injured worker.
- Nylon straps with 3" loops and soft felt padding.

<b>No. 696NW</b>	Wristlets	Wt. 0.5 lb.
------------------	-----------	-------------

# AERIAL SELF RESCUE EQUIPMENT

## PARA-PAK

The Para-Pak is a self contained kit for emergency evacuation from an elevated work area.

The basic device consists of a 3/8" Aramid fiber line packed into a low profile cartridge. 75' of line stores in an 10" x 10" pouch less than 2" thick.

It's much smaller and weighs less than similar products that use 1/2" synthetic line. The thin profile and light weight make this a very versatile and user friendly system.

## PARA-PAK RESCUE KIT

- Combination of 683 harness, Para-Pak and lanyard.
- Requires the 683X Series harness to connect to the Para-Pak and a 6" back attachment point extension.
- The FR-Nomex Para-Pak includes a pre-rigged nylon ladder and clips to connect to the harness pad.
- Requires a lanyard that has a ring or loop for connecting to the rescue line.
- Can't be retrofitted on existing fall arrest harnesses or lanyards.

<b>No. 683XC6</b>	X-Style harness with 6" loop and D-Ring	Wt. 4.5 lb.
<b>No. SR700XPL</b>	Para-Pak with shoulder pad mounting system for harness	Wt. 2.5 lb.
<b>No. SR2804-5.5HL</b>	Lanyard with rescue ring	Wt. 2.5 lb.



 Video is available on our website or scan the QR code



## EMERGENCY SELF EVACUATION FROM AN AERIAL LIFT

### SR PACK

- Evacuation or rescue from an elevated work area.
- Lightweight and easy to carry.
- Weather resistant pouch and has a mechanical descent device that will stop if the control is released.
- A harness with a front attachment is required.
- Other lengths available upon request

<b>No. SRPACK-100AL</b>	Rescue Pack (100 ft.)	Wt. 3.3 lb.
-------------------------	-----------------------	-------------





# AERIAL SELF RESCUE EQUIPMENT



**FE700SRKSC**



**FE700BMSRSC**

## AERIAL LIFT-SELF RESCUE

- Designed for personal evacuation from a stranded aerial lift.
- 50' of 7/16" dynamic double braid rope with an anchor eye spliced on one end, two carabiners, an DSD30 double stop descender and a carrying bag.
- Available as a boom-mount device.
- Proper training is required to use this item.
- Longer line is available.

**No. FE700SRKSC** Aerial self rescue kit      Wt. 5.0 lb.  
**No. FE700BMSRSC** Boom mount rescue kit      Wt. 5.5 lb.

**i** Video is available on our website or scan the QR Code.



**USE YOUR PHONE TO SCAN THE QR CODE FOR MORE INFO!**

**NOTES:**

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

**W.M. BASHLIN COMPANY BEGINS OPERATION IN 1926, PROMISING "COMFORT, QUALITY AND SAFETY" FOR THE PROFESSIONAL LINEMAN.**

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....



### BAGS, BUCKETS, AND TOOL CARRIERS

**Bashlin Industries, Inc.** has a wide assortment of tool carriers for utility work. We fabricate them from canvas, nylon, and durable synthetics. They are designed for all sorts of job applications to make your work easier.

# GEAR BAGS, BACK PACKS AND TOOL BAGS

## BACK PACK SERIES

- Made from coated polyester and canvas materials.
- These durable and versatile gear bags offer the user plenty of room for storage of tools and gear.
- Available in yellow, black, orange, and camo.
- Features high visibility orange canvas liner.
- Available with or without side zipper.



11BPD-B



11BPD-Y



11BPD-O

## 11BPD BACK PACK DUFFLE

- Interior lined with high visibility orange material making what you're looking for easy to find.
- Draw string closure with buckles to secure top cover.
- Padded back with adjustable shoulder straps and rubberized handle.
- Front Pocket: 16" x 16" x 4".

<b>No. 11BPD-B</b>	Black, 26"H x 50"C (around)	Wt. 6.0 lb.
<b>No. 11BPD-C</b>	Camo, 26"H x 50"C (around)	Wt. 6.0 lb.
<b>No. 11BPD-O</b>	Orange, 26"H x 50"C (around)	Wt. 6.0 lb.
<b>No. 11BPD-Y</b>	Yellow, 26"H x 50"C (around)	Wt. 6.0 lb.



11BPDZ-C

\*\*Contents not included\*\*

## 11BPDZ BACK PACK DUFFLE WITH ZIPPER

Bashlin's 11BPDZ Back Pack Duffel with durable 2-way zipper allows you to easily access your gear from the side as well as the top. The bright orange liner helps you find what you're looking for fast. Just like the original 11BPD, this rugged gear bag can be carried on the back as a back pack, slung over the shoulder, or suitcase style using the 2 heavy duty web handles. Other features include comfortable 2" padded shoulder straps with quick adjusting ladder lock style buckles, chest strap, back pad and large front pocket. The 11BPDZ will get all your gear to the job so you can get it done! Available in Camo, Orange, Yellow and Black.

<b>No. 11BPDZ-B</b>	Black, 26"H x 50"C (around)	Wt. 6.0 lb.
<b>No. 11BPDZ-C</b>	Camo, 26"H x 50"C (around)	Wt. 6.0 lb.
<b>No. 11BPDZ-O</b>	Orange, 26"H x 50"C (around)	Wt. 6.0 lb.
<b>No. 11BPDZ-Y</b>	Yellow, 26"H x 50"C (around)	Wt. 6.0 lb.

## CUSTOM LOGOS AND MARKING

Contact customer service for more information about having your custom logo on our canvas and poly-coated products. There is no additional cost for making the product, simply a one time screen set up fee!



10S-14

## 10S SERIES

- This durable bag is made of heavy canvas.
- Constructed with a steel frame, polyester web handles, and either a reinforced coated polyester bottom or hard plastic bottom.

<b>No. 10S-14</b>	Small bag with hard plastic bottom 14" x 10" x 7"	Wt. 4.0 lb.
<b>No. 10S-18</b>	Mid-size bag with coated polyester bottom 18" x 12" x 9"	Wt. 5.0 lb.
<b>No. 10S-22</b>	Medium bag with coated polyester bottom 22" x 12" x 7"	Wt. 5.75 lb.
<b>No. 10S-24</b>	Large bag hard plastic bottom 24" x 12" x 7"	Wt. 5.75 lb.

# GEAR BAGS, BACK PACKS AND TOOL BAGS



11DCS-B



11DCS

## 11DC SERIES

- Made of durable coated polyester.
- Nylon web handles.
- Hard plastic bottom and flap to cover the opening.
- The "S" model features a polyester web shoulder strap.
- Also available in black, yellow, orange and camo.

<b>No. 11DC</b>	24" x 19" x 11"	Wt. 8.0 lb.
<b>No. 11DCS</b>	With shoulder strap	Wt. 9.0 lb.



12S



12SS

## 12S SERIES

- This bag is made of canvas or coated polyester.
- It has a steel frame with polyester web handles and hard plastic bottom.
- Features inside and outside pockets.
- The "S" model features a polyester web shoulder strap.
- Also available in black, yellow, orange and camo.

<b>No. 12S</b>	22" x 13" x 11"	Wt. 8.0 lb.
<b>No. 12SS</b>	22" x 13" x 11" with shoulder strap	Wt. 9.0 lb.
<b>No. 12SC</b>	22" x 13" x 11" coated polyester	Wt. 8.0 lb.
<b>No. 12SCS</b>	22" x 13" x 11" coated polyester with shoulder strap	Wt. 9.0 lb.



DL11DC-RB-C



DL11DC-RB-O

## DL11DC-RB SERIES: LARGE WHEEL "DRAG" BAG

- Has a hard plastic bottom and nylon web handles.
- Large 6" all terrain wheels.
- Features a flap to cover the opening when exposed to weather.
- Extendable handle.
- Available in black, yellow, orange and camo.

<b>No. DL11DC-RB</b>	24" x 19" x 11" bag on large wheels	Wt. 10.0 lb.
----------------------	--	--------------



DL11DC-R-B

## DL11DC-R: ROLLER BAG

- Has a hard plastic bottom and nylon web handles.
- Features a flap to cover the opening when exposed to weather.
- Durable nylon wheels with an extendable handle.
- Available in black, yellow, orange and camo.

<b>No. DL11DC-R</b>	24" x 19" x 11" bag on wheels	Wt. 7.0 lb.
---------------------	-------------------------------	-------------

# GLOVE/SLEEVE BAGS



24M



24MC



24L



24LC



24LB



24LBC



24XL2P

## LINEMEN'S GLOVE BAGS

- Best way to ensure proper protection of rubber gloves.
- Constructed from durable canvas or coated polyester.
- Features a snap button closure and an attachment hook.
- Includes drain holes in the bottom.
- Available with a bellows opening which is wider at the top for easier storage.
- Two pocket bags are good for keeping high voltage and low voltage gloves separate.
- Add "C" to part number for coated bags.

<b>No. 24M</b>	Standard opening (10 1/2" gloves)	Wt. 0.5 lb.
<b>No. 24</b>	Standard opening (14" gloves)	Wt. 0.7 lb.
<b>No. 24B</b>	Bellows opening (14" gloves)	Wt. 0.7 lb.
<b>No. 24L</b>	Standard opening (16" gloves)	Wt. 0.7 lb.
<b>No. 24LB</b>	Bellows opening (16" gloves)	Wt. 0.8 lb.
<b>No. 24XL</b>	Standard opening (18" gloves)	Wt. 0.8 lb.
<b>No. 24XLB</b>	Bellows opening (18" gloves)	Wt. 0.8 lb.
<b>No. 24L2P</b>	2 pocket glove bag (16" gloves)	Wt. 1.10 lb.
<b>No. 24XL2P</b>	2 pocket glove bag (18" gloves)	Wt. 1.10 lb.



24SLC



24SLV



24SLV

## LINEMEN'S SLEEVE BAGS

- Constructed from durable canvas or coated polyester.
- Hanging loop and attachment hook standard.
- Optional Snap button or Hook-N-Loop closure.

<b>No. 24SL</b>	Sleeve bag	Wt. 1.0 lb.
<b>No. 24SLV</b>	Hook-N-Loop closure sleeve bag	Wt. 1.0 lb.



24SLGP-17



24SLGPC-17

## GLOVE/SLEEVE BAGS

- Standard size sleeve bag combined with the glove bag.
- Add "C" to part number for polyester coated bags
- Add a pocket for safety glasses by including "GP" in the part number.

<b>No. 24SLGP-15</b>	For 14" rubber gloves	Wt. 1.5 lb.
<b>No. 24SLGP-17</b>	For 16" rubber gloves	Wt. 1.6 lb.
<b>No. 24SLGP-19</b>	For 18" rubber gloves	Wt. 1.70 lb.

# BLANKET BAGS, ROLLS, CANISTERS



**24RBR-38**



**24RBR-38**

## BLANKET ROLLS

- Easy way to store and carry rubber blankets.
- Constructed from durable canvas with four blanket capacity.
- Features nylon snap closures and a nylon web carrying handle.

<b>No. 24RBR-38</b>	For 36" blankets	Wt. 1.5 lb.
<b>No. 24RBR-47</b>	For 46" blankets	Wt. 2.0 lb.



**24RBC-38**

## BLANKET BAGS

- Blanket bags are made of heavy duty coated polyester. They have reinforced seams for added durability.

<b>No. 24RBC-38</b>	For 36" blankets	Wt. 1.10 lb.
<b>No. 24RBC-47</b>	For 46" blankets	Wt. 1.5 lb.



**BC136-2 BC136-3 BC136-4**

## BLANKET CANISTERS

- Blanket canisters make storage easy while providing mechanical and contamination protection.
- Made of high impact polyethylene.

<b>No. BC136-2</b>	5" x 37" (capacity: 2)	Wt. 2.5 lb.
<b>No. BC136-3</b>	6" x 37" (capacity: 3)	Wt. 2.75 lb.
<b>No. BC136-4</b>	7" x 37" (capacity: 4)	Wt. 3.25 lb.
<b>No. BC136-6</b>	9" x 37" (capacity: 6)	Wt. 4.75 lb.



**208-30 210-30**

## LINE HOSE BAGS

- Cotton bags that make handling and storage of line hose easier.
- Reinforced tops, and leather bottoms.

<b>No. 208-30</b>	8" x 30"	Wt. 2.0 lb.
<b>No. 208-42</b>	8" x 42"	Wt. 2.5 lb.
<b>No. 208-48</b>	8" x 48"	Wt. 3.0 lb.
<b>No. 208-60</b>	8" x 60"	Wt. 3.5 lb.
<b>No. 210-30</b>	10" x 30"	Wt. 3.0 lb.
<b>No. 210-42</b>	10" x 42"	Wt. 3.5 lb.
<b>No. 210-48</b>	10" x 48"	Wt. 4.0 lb.
<b>No. 210-60</b>	10" x 60"	Wt. 4.5 lb.
<b>No. 212-30</b>	12" x 30"	Wt. 3.5 lb.
<b>No. 212-42</b>	12" x 42"	Wt. 4.0 lb.
<b>No. 212-48</b>	12" x 48"	Wt. 4.5 lb.
<b>No. 212-60</b>	12" x 60"	Wt. 5.0 lb.

# HOT STICK, GROUND SET BAGS



10S-24

## 10S SERIES

- This durable bag is made of heavy canvas.
- Includes a steel frame, polyester web handles and hard plastic bottom.

<b>No. 10S-14</b>	Small bag with hard plastic bottom 14" x 10 x 7"	Wt. 4.0 lb.
<b>No. 10S-24</b>	Large bag hard plastic bottom 24" x 12" x 7"	Wt. 5.75 lb.



24HSC

## HOT STICK BAGS

- Protective bags that are made from coated polyester material and feature a snap button closure.
- Order according to the length of the stick and size as indicated with the stick description.

<b>No. 24HSC-30</b>	30" hot stick bag	Wt. 1.5 lb.
<b>No. 24HSC-45</b>	45" hot stick bag	Wt. 2.0 lb.
<b>No. 24HSC-60</b>	60" hot stick bag	Wt. 1.5 lb.
<b>No. 24HSC-65</b>	65" hot stick bag	Wt. 2.0 lb.
<b>No. 24HSC-75</b>	75" hot stick bag	Wt. 1.5 lb.
<b>No. 24HSC-80</b>	80" hot stick bag	Wt. 2.0 lb.
<b>No. 24HSC-100</b>	100" hot stick bag	Wt. 1.5 lb.
<b>No. 24HSC-125</b>	125" hot stick bag	Wt. 2.0 lb.
<b>No. 24HSC-130</b>	130" hot stick bag	Wt. 1.5 lb.
<b>No. 270B</b>	Rescue stick bag for #270	Wt. 2.0 lb.
<b>No. 1967B</b>	Bag for 1967RCP	Wt. 1.5 lb.

## NOTES:

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....



# TOOL BUCKETS, HARNESS AND TOOL BAGS



18P-O

18P-O (INSIDE)



23P



706



706 (BACK)



706S

706S



706S-BACK

## TOOL BUCKETS

- Bashlin tool buckets are made of the highest quality materials for long life.
- Available in canvas or coated polyester and feature leather or plastic bottoms.
- Inside pockets are standard on the 23 series buckets.
- "LS" series buckets have no snaps.
- Add "C" for coated bags.

### LEATHER BOTTOM:

<b>No. 18</b>	8" x 12"	Wt. 1.5 lb.
<b>No. 18LS</b>	8" x 12" - no snap	Wt. 1.25 lb.
<b>No. 23</b>	12" x 16"	Wt. 3.75 lb.
<b>No. 23LS</b>	12" x 16" - no snap	Wt. 3.5 lb.

### PLASTIC BOTTOM:

<b>No. 18P</b>	8" x 12"	Wt. 1.5 lb.
<b>No. 18P-O</b>	8" x 12", orange	Wt. 1.5 lb.
<b>No. 18LSP</b>	8" x 12" - no snap	Wt. 1.25 lb.
<b>No. 23P</b>	12" x 16"	Wt. 3.75 lb.
<b>No. 23LSP</b>	12" x 16" - no snap	Wt. 3.5 lb.

## 700 SERIES: AERIAL BAGS

- Non-conductive frame to keep the bag open.
- Reinforced bottom.
- Ten inside pockets for tools.
- 14" x 7" x 10.

<b>No. 706</b>	Tool bag with PVC hooks	Wt. 3.0 lb.
<b>No. 706S</b>	Tool bag with rope and snap	Wt. 3.0 lb.



717



717-SIDE

## 717 SPLICER'S TOOL BAG

- Non-conductive frame to keep the bag open.
- Tool pockets inside and 14 outside pockets.
- Reinforced bottom.

<b>No. 717</b>	14 1/2" x 7" x 9 1/2"	Wt. 3.0 lb.
----------------	-----------------------	-------------

# AERIAL TOOL BAGS AND TOOL CARRIERS



706-20

## 706-20

- 20" deep and has 10 inside pockets.
- Includes 712 hooks.

No. 706-20      14" x 7" x 20"      Wt. 3.25 lb.



721AM

722AM

## TOOL BUCKET/BAG FOR "SHOOT ON" CONNECTORS

- Bashlin manufactures both a tool bucket and a bag for the "shoot on" connectors.
- Ample storage for the cartridges, the tool, as well as the connectors and wedges.
- Includes 712 hooks for hanging in bucket.
- The bucket includes a snap on the rope.
- Available in canvas or coated polyester.

No. 721AM      Tool bag (8" x 12", polyester)      Wt. 2.0 lb.  
 No. 722AM      Tool bucket (8" x 12", polyester)      Wt. 2.5 lb.  
 No. 723AM      Tool bucket (8" x 12", canvas)      Wt. 2.0 lb.



726

## COMPRESSION TOOL AND CUTTER BAG

- Three pocket coated polyester bag.
- Two pockets are for compression tools, one is for bolt cutters.
- Two PVC hooks are included.

No. 726      12" x 20"      Wt. 3.5 lb.



10HBT

## HARNES BAGS

- Store and protect your body harness from most mechanical, chemical and UV damage in this high visibility orange canvas bag.

No. 10HBT      Harness bag      Wt. 1.0 lb.

# TOOL BOARDS

## TOOL CARRIERS

Bashlin's tool boards are made of ABS. This light, durable material does not fray or flake and has superior cold weather characteristics. These boards are built and arranged with the worker in mind. They save precious space in the bucket and keep the tools in a handy position.



708



708L

## HAMMER/HAND TOOLS/ BOLTS AND NUTS

- This is our original tool board. It remains a popular design with many utilities.
- 18" x 20".
- Features a 4 pocket tool holster, knife sheath, tool loops, and leather or canvas nut and bolt bag.

**No. 708** With 25B bag Wt. 6.25 lb.  
**No. 708L** With 26L bag Wt. 7.0 lb.



708S

## HAND TOOLS/PRUNING SAW/ BOLT CUTTER

- A pruning saw, more tools and cutter can be easily carried on this board.
- The #26R canvas bag has extra reinforcement for extended wear.
- 18" x 20".

**No. 708S** With 26R bag Wt. 8.5 lb.



708-2

## COMPRESSION TOOL/BITS/ HAND TOOLS

- This board holds a variety of most often used tools.
- Holds speed wrenches, hammers, compression tools, and a light.
- 18" x 20".

**No. 708-2** With 726 and 25B bags Wt. 7.0 lb.



708ID

## HAND TOOLS/DRIVERS

- This aerial lift tool board complements our popular 708 Tool Board Series.
- Designed by Niagara Mohawk, it is perfect for aerial lifts that use an impact driver and need a convenient socket holder.
- Carries 6, 1/2" drive sockets on the tool board. It firmly holds the sockets with extra long socket stems that can accommodate all deep well sockets.

**No. 708ID** With 25B Bag Wt. 14.0 lb.

# TOOL BOARD/TOOL TRAY



708G

## 708G

- Includes spaces for drill bits, drivers, and the Lowell wrench.
- 18" x 20".

**No. 708G** Tool board with 26L bag Wt. 12.0 lb.



708B

## BLANK TOOL BOARD

- Blank ABS tool boards allowing you to customize a tool board to suit your needs.
- 18" x 20".

**No. 708B** Blank tool board Wt. 4.0 lb.



724

## TOOL APRON

- Made from yellow heavyweight coated polyester.
- It has socket pockets, 2 pockets for auger bits, a hammer loop, and 2 large pockets for bolts, nuts and connectors.
- 2 PVC hooks are included.
- 23 7/8" x 21 1/4"

**No. 724** Tool apron Wt. 5.0 lb.



727-L

## TOOL TRAY

- This tool tray features an adjustable mount and smooth molded construction.
- 6" x 14" x 7 1/2".

**No. 727-L** Tool tray Wt. 8.0 lb.



712



712-2



712-3



712P



712P-3



712CE-3

## HOOKS

- PVC and polymer hooks for hanging bags and tool aprons.

<b>No. 712</b>	PVC-3" buckets	Wt. 0.21 lb.
<b>No. 712-2</b>	PVC-standard buckets	Wt. 0.21 lb.
<b>No. 712-3</b>	PVC-3" lip buckets	Wt. 0.21 lb.
<b>No. 712P</b>	Polymer-standard buckets	Wt. 0.31 lb.
<b>No. 712P-3</b>	Polymer-3" lip buckets	Wt. 0.31 lb.
<b>No. 712CE-3</b>	Polymer 3" lip buckets	Wt. 0.31 lb.




700BK

## BUCKET KNUCKLE

- Tool holding and organization bracket designed to suspend and separate tools inside an aerial device.
- Durable UHMW plastic.
- Measures 19 3/4" x 3" x 2 1/2".
- Hang from two standard bucket hooks (not included).
- Made in USA.

**No. 700BK** Bucket knuckle Wt. 1.5 lb.

# SAFETY HOOK/BUCKET COVER

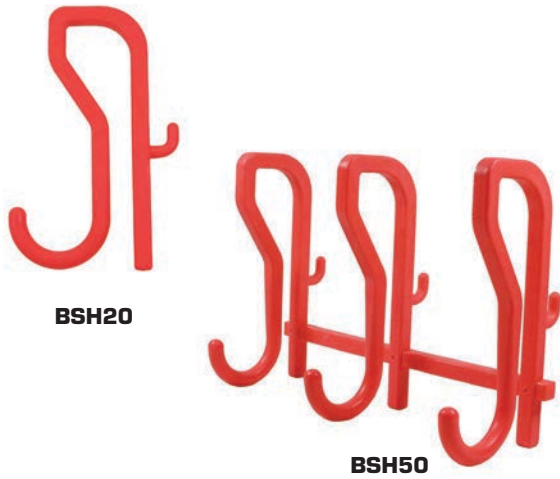

**BSH20**

**BSH50**

## SAFETY HOOK

- Rugged hook with a break strength in excess of 250 lb.
- It will safely replace many hooks formed from #8 copper hanging on line trucks everywhere.

<b>No. BSH20</b>	Double hook	Wt. 0.6 lb.
<b>No. BSH50</b>	Single bar with 3 double hooks	Wt. 1.5 lb.



**745**

## REINFORCED BUCKET COVER

- Rugged coated polyester with or without foam insert.
- Designed for 24" x 24" bucket.
- Rope and snap hook to help secure to bucket.

<b>No. 744</b>	Soft bucket cover	Wt. 4.4 lb.
<b>No. 745</b>	Reinforced bucket cover	Wt. 6.7 lb.



**731CS**

## CHAIN SAW HOLDER

- This tool holder hangs on the outside of the bucket and will hold cutters, compression tools and/or a chain saw.
- Made of ABS plastic.
- Durable in all temperature ranges.

<b>No. 731CS</b>	Tool holder	Wt. 5.0 lb.
------------------	-------------	-------------







**BASHLIN INDUSTRIES INC.**  
119 W. Pine St. Grove City, PA 16127

## LINE VEHICLE EQUIPMENT AND CONSTRUCTION TOOLS

**Bashlin Industries, Inc.** makes and sells quality tools and equipment for the professional lineworker. This includes slings, winchlines, payout reels, hot sticks, and more.

We specialize in the hard-to-find equipment unique to this market.

# SLINGS/POLE SLINGS

## NYLON SLINGS

- Rugged 950 Series orange nylon slings are made for the utility industry and to current ANSI standards.
- Standard length is 3 feet.
- Other lengths available upon request.



950-100



950-300

## ENDLESS SLINGS

	LOAD RATING LBS.			
	WIDTH	VERTICAL	CHOKER	BASKET
No. 950-100	1"	3200	2560	6400
No. 950-100D	1" DT	6200	4960	12400
No. 950-175	1 3/4"	4000	3200	8000
No. 950-175D	1 3/4" DT	8800	7040	17600
No. 950-200	2"	5600	4480	11200
No. 950-200D	2" DT	12200	9760	24400
No. 950-300	3"	8000	6400	16000
No. 950-300D	3" DT	15200	12160	30400



951-100



951-175




951-200

## DOUBLE EYE STANDARD

	LOAD RATING LBS.			
	WIDTH	VERTICAL	CHOKER	BASKET
No. 951-100	1"	3200	2560	6400
No. 951-175	1 3/4"	5400	4320	10800
No. 951-200	2"	6400	5120	12800
No. 951-300-4	3"	7800	6240	15600



**WARNING:** Always inspect slings before use. Heavily abraded, burned, or cut slings should be removed from service.

 Contact customer service for abrasion resistance wear pads or custom slings.

## DOUBLE EYE SINGLE PLY

	LOAD RATING LBS.			
	WIDTH	VERTICAL	CHOKER	BASKET
No. 952-100	1"	1600	1280	3200
No. 952-175	1 3/4"	2800	2240	5600
No. 952-200	2"	3200	2560	6400
No. 952-300-4	3"	4200	3360	8400



953-200

## RETURN EYE

	LOAD RATING LBS.			
	WIDTH	VERTICAL	CHOKER	BASKET
No. 953-200	2"	5600	4480	11200
No. 953-350	3 1/2"	7600	6080	15200

## POLE SLINGS

- Pole slings are available with (2011) or without (2012) hardware. The 2011 is designed for easy use with a shotgun stick.



2011-36

	LOAD RATING LBS.				
	WIDTH	VERTICAL	CHOKER	BASKET	WT.
No. 2011-36	1 3/4"	1000	1000	2000	1.75 lb.
No. 2011-48	1 3/4"	1000	1000	2000	1.75 lb.
No. 2012-36	1 3/4"	3300	2640	6600	0.7 lb.
No. 2012-48	1 3/4"	3300	2640	6600	0.7 lb.



962NWTS

## 962NWTS: ADJUSTABLE NYLON TRANSFORMER SLING

- 1,000 lb. load rating.
- Features large rings to fit over the lifting hooks.

**No. 962NWTS** Adjustable nylon transformer sling Wt. 1.6 lb.



# ROPE SLINGS/AUGER SLINGS

## ADJUSTABLE ROPE SLINGS

- These slings use 12 strand polyester single braid "P", 12 strand high-tenacity single braid urethane coated rope "Y", or Vectran single braid rope "V".



		LOAD RATING LBS.		
		VERTICAL	CHOKER	BASKET
<b>No. 960P</b>	1/2" Polyester Blend Adj. 28" - 48"	1500	1200	2990
<b>No. 960Y</b>	5/8" Coated Polyester Adj. 32" - 60"	3344	2675	6598
<b>No. 960YL</b>	5/8" Coated Polyester Adj. 32" - 96"	3344	2675	6598

## DOUBLE LEGGED ADJUSTABLE SLINGS

- The double leg adjustable rope sling features a center lifter point, with a protective cover and adjustment on both legs.
- Ideal for hanging transformers.



		LOAD RATING LBS.		
		VERTICAL	CHOKER	BASKET
<b>No. 962P</b>	1/2" Polyester Blend Adj. 30" - 50"	1500	1200	2990
<b>No. 962Y</b>	5/8" Coated Polyester Adj. 30" - 50"	3344	2675	6598

## FOUR LEGGED ADJUSTABLE SLINGS



- For pad mount transformers, we have the four legged sling. Each leg adjusts individually for quick rigging.

		LEG LENGTH	LOAD RATING
<b>No. 965P</b>	1/2" Polyester Blend	4' - 5'	6000 lb.
<b>No. 965Y</b>	5/8" Coated Polyester	5' - 7'	13376 lb.
<b>No. 965YL</b>	5/8" Coated Polyester	6' - 8'	13376 lb.
<b>No. 965V</b>	5/8" Vectran	5' - 7'	31920 lb.

\*When legs are loaded evenly

## FIXED LENGTH ROPE SLINGS

- Rope slings are made from 5/8" 12 strand high-tenacity single braid urethane coated rope. The standard length is 3' for the endless, 4' for double eye.



4950-58Y



4951-58Y

		LOAD RATING LBS.		
		VERTICAL	CHOKER	BASKET
<b>No. 4950-58Y</b>	5/8" endless sling	6460	5168	12920
<b>No. 4951-58Y</b>	5/8" double eye	3800	3040	7600



770W



770R



770RDE

## AUGER WIND UPS

- Strong, light-weight featuring reinforced eyes.
- Standard length is 10' (other lengths are available).

		LOAD RATING LBS.		
		VERTICAL	CHOKER	BASKET
<b>No. 770W</b>	1" x 10' Nylon Web	1600	1280	3260
<b>No. 770R</b>	5/8" x 10' Coated Polyester	3800	3040	7600
<b>No. 770RDE</b>	1" x 10' Double Braid	8800	7040	17600



# GRIP SLINGS

Our "GRIP" slings are ideal for handling and setting poles made from various materials, especially those with a smooth or painted surface. The added rubber material provides extra "GRIP" that can help reduce slippage and protect the finish of materials.



- Made with 1 3/4" web with a 1 3/4" wide section of diamond pattern rubber.
- 2011SE series has a sewn eye and steel ring
- 2012 series has 2 soft eyes.
- The 4" soft eyes have nylon wear sleeves and are easy to get on the hook.
- Available in both 52" and 72" lengths to suit your needs

2011 SE Series	SWL*
Vertical	2500 lbs.
Choked	2500 lbs.
Basket	5000 lbs.

2012 Series	SWL*
Vertical	3300 lbs.
Choked	2640 lbs.
Basket	6600 lbs.



- 951 Series "GRIP" slings both have two 4" sewn eyes with nylon wear sleeves and a 2" wide section of diamond pattern rubber for the "GRIP"
- Standard length for these slings is 72"

951-300-6G Series	SWL*
Vertical	7800 lbs.
Choked	6240 lbs.
Basket	15600 lbs.

951-200-6G Series	SWL*
Vertical	6400 lbs.
Choked	5120 lbs.
Basket	12800 lbs.

### \*SWL - Safe Working Load

**CONTACT US IF YOU REQUIRE MORE LIFTING CAPACITY OR A CUSTOM LENGTH**



**WARNING:** Proper training when using these products is required

USE YOUR PHONE TO SCAN THE QR CODE FOR MORE INFO!





# ADJUSTABLE SLINGS

## NO. 962Y-CL SERIES ADJUSTABLE SLINGS

- These two legged adjustable slings are great for handling pad mount transformers.
- Each leg can be easily adjusted. The center leg is designed to hold transformer lid.
- Made using 5/8" coated polyester rope with nylon wear sleeves on eyes.
- Leg length adjusts from 3' to 5'

SWL\* 6410 lb.

\*\*When each leg is loaded equally\*\*

**\*SWL - Safe Working Load**

## NO. 965Y-CL SERIES ADJUSTABLE SLING

- These four legged adjustable slings are great for handling pad mount transformers.
- Each individual leg can be easily adjusted.
- The center leg is designed to hold transformer lid.
- Made using 5/8" coated polyester rope with nylon wear sleeves on eyes.
- Leg length adjusts from 5' to 7'

SWL\* 12820 lb.

\*\*When each leg is loaded equally\*\*



962Y-CL



965Y-CL

**CONTACT US FOR  
MORE INFORMATION**

# HANDLINES AND SLACK BLOCKS



940



945



945T

## HANDLINES

- 1/2" polyester blend braided rope is the standard rope for all 940 series handlines. It is easily spliced and resists rotation under load.
- Standard 940 includes 500 lb. SWL\* 35H drop forged alloy steel handline hook, SL6650A steel double locking snaphook, 75' of rope, and premium block.
- 940R comes with a 35H hook, 75' of rope, and steel snaphook.

<b>No. 940</b>	Complete handline assembly 500 lb.	Wt. 8.75 lb.
<b>No. 940R</b>	Rope only with 35H hook and snaphook - 500lb WLL*	Wt. 6.75 lb.

\*SWL - Safe Working Load



## SLACK BLOCK ASSEMBLY

- Slack blocks come with 30' of 3/8" double braid or polyester twist rope.
- "H" series features extended hooks.
- The maximum safe working load is 750 lb. SWL\*

<b>No. 945</b>	Double Braid	Wt. 4.25 lb.
<b>No. 945H</b>	Double Braid with extended hooks	Wt. 4.25 lb.
<b>No. 945T</b>	Poly-Twist	Wt. 4.25 lb.
<b>No. 945HT</b>	Poly-Twist with extended hooks	Wt. 4.25 lb.



33



35GP



33L



35H



3550

## PARTS FOR HANDLINES

<b>No. 33</b>	Handline carrier	Wt. 0.1 lb.
<b>No. 33L</b>	Locking handline carrier	Wt. 0.1 lb.
<b>No. 35H</b>	Handline hook - 500 lb. SWL*	Wt. 0.75 lb.
<b>No. 35GP</b>	Double hook - 100 lb. SWL*	Wt. 0.6 lb.
<b>No. 3550</b>	Handline block	Wt. 2.0 lb.

\*SWL - Safe Working Load.

 For handlines longer than 75' contact customer service

# WINCH LINES/PULLING LINES



## WINCH LINES

Bashlin will fabricate replacement winch lines for your material handling and digger trucks. Our splicers can manufacture to your specifications. Call us for pricing and delivery.

Ask about our winch line maintenance program.




## DOUBLE BRAID WINCH LINES

- Double braid is low stretch, high strength rope with excellent dielectric properties.
- Urethane coating on the end provides abrasion resistance where you need it.
- Color coded coatings can make it easy to determine when it is time to replace your lines.
- 1/2" and 1" Double braid available.

**No. 750DE12W08** 1/2" Double braid winch line with 8' of urethane coating. Average breaking strength 11,000 - 2,200 lb. working load (5/1) 7.8 lb. per 100'

**No. 750DE10W08** 1" Double braid Winch line with 8' of urethane coating. Average breaking strength 46,200 - 9,240 lb. working load (5/1) 33.7 lb. per 100'

 Spools, shields, and shackles are available for your winch lines. Call for a quote.

## HMPE WINCH LINES

- Double braided rope constructed of an inner load bearing HMPE core that is very strong with very little stretch. HMPE has the highest strength to weight ratio of any high modulus fiber.
- The core is urethane coated and over-braided with a polyester sleeve for a long wearing, extra strong line."

**No. 750MP12W0** 1/2" HMPE winch line with urethane coating. Average breaking strength 21,000 - 4,200 lb. working load (5/1) 7.2 lb. per 100'.

**No. 750MP78W0** 7/8" HMPE winch line with urethane coating. Average breaking strength 63,000 - 12,600 lb. working load (5/1) 21.3 lb. per 100'.

We can repair your worn and damaged lines when possible.



## PULLING LINES INCLUDING PILOT LINES AND SPIDER LINES

- We recommend urethane coated 12 strand high-tenacity single braid rope for stringing applications.
- Call for part number, pricing and delivery.



# PULLING GRIPS AND HOISTS



1685-20



1671-10

## KLEIN PARALLEL JAW GRIPS

- The Klein parallel jaw grips have longer jaws for less slippage and conductor damage.

	MIN. CABLE	MAX. CABLE	SAFELOAD	WT.
No. 1686-10	.20	.40	10,000 lb.	5.0 lb.
No. 1686-20	.20	.40	10,000 lb.	5.0 lb.
No. 1671-10	.37	.75	10,000 lb.	5.0 lb.
No. 1672-10	.37	.75	10,000 lb.	5.0 lb.
No. 1685-20	.157	.844	4,500 lb.	3.0 lb.
No. 1685-31	.625	1.25	6,600 lb.	5.0 lb.



LMG4500



LMG4501

## LITTLE MULE GRIPS

- These parallel jaw grips resist jamming and will release instantly. The design reduces cable damage.

### STANDARD GRIPS:

	MIN. CABLE	MAX. CABLE	SAFELOAD	JAWS	WT.
No. LMG1000	.04	.394	1,000 lb.	Serrated	0.5 lb.
No. LMG2000	.109	.594	2,000 lb.	Serrated	1.0 lb.
No. LMG4500	.18	.60	5,000 lb.	Serrated	3.75 lb.
No. LMG4600	.30	.80	10,000 lb.	Serrated	6.50 lb.
No. LMG4800	.70	1.25	12,000 lb.	Serrated	9.0 lb.

### HOT LINE GRIPS:

	MIN. CABLE	MAX. CABLE	SAFELOAD	JAWS	WT.
No. LMG4501	.18	.60	5,000 lb.	Serrated	4.0 lb.
No. LMG4601	.30	.80	10,000 lb.	Serrated	7.0 lb.
No. LMG4801	.70	1.25	12,000 lb.	Serrated	9.0 lb.



300A

## LITTLE MULE STRAP HOIST

- The 300 Series hoists are designed for line work. They are light, easy to handle, and rugged. All of the working parts are exposed for easy field repair.

	SINGLE LINE CAPACITY	SINGLE LINE LIFT LENGTH	DOUBLE LINE CAPACITY	DOUBLE LINE LENGTH	WT.
No. 300A	1,500 lb.	9'	3,000 lb.	4.5'	10.5 lb.
No. 300DA	1,500 lb.	9'	3,000 lb.	4.5'	11.0 lb.



PA2000

## CM TORNADO CHAIN HOIST

- Racheting chain hoist with swivel hooks.

	SINGLE LINE CAPACITY	SINGLE LINE LIFT LENGTH	WT.
No. PA2000	3,000 lb.	5	21.1 lb.



903LT

## 903LT: LIF-T

- Great for pad mount transformers.
- 5/8" grade 8 construction with handle.
- Orange corrosion resistant powder coating.
- Sold as a pair.
- 1,000 lb. capacity.


No. 903LT: LIF-T Lifting T

Wt. 0.5 lb.

# CROSS ARM IRON, PAY-OUT REELS AND GROUND ROD DRIVERS



900

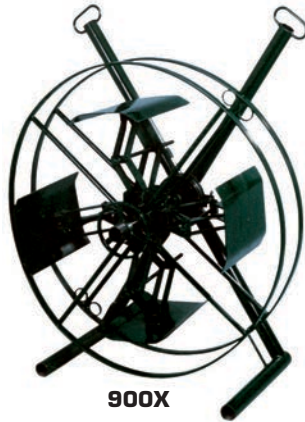

900X

## PAY-OUT REELS

- Fully adjustable, all purpose device for use on trucks or as a portable pay-out reel.
- Works on many different coil sizes.
- Standard grease fitting provides full lubrication.
- Adjustable brake maintains line tension.
- 900-900X coil capacity.
- Diameter: 14" (minimum) - 32" (maximum)
- Width: 6" (minimum) - 11" (maximum)

	HEIGHT	WIDTH	DEPTH	WT.	SHIP WT.
<b>No. 900</b>	40"	37"	19"	145 lb.	175.0 lb.
<b>No. 900S</b>	35"	32"	19"	95 lb.	120.0 lb.
<b>No. 900X</b>	45"	37"	19"	165 lb.	180.0 lb.



901LF



901TI

## CROSS ARM IRON

- Here is an easier way to rig for lifting a transformer (901LF), or sagging a line (901TI). These versatile anchors can be placed in position with a hot stick even if pre-rigged. The load rating is 1500 lb.

<b>No. 901LF</b>	Cross arm iron	Wt. 3.5 lb.
<b>No. 901TI</b>	Cross arm iron II	Wt. 3.5 lb.



902

## WIRE BASKET

- Lightweight, compact wire dispenser that will accommodate reels up to 26" x 4 1/4".
- Features a hanger for easy mounting on a truck and an eyelet for temporary pole attachment.

<b>No. 902</b>	Wire basket	Wt. 11.0 lb.
<b>No. 902-30</b>	30" wire basket	Wt. 12.0 lb.



930



930UT

## GROUND ROD DRIVER

- Designed to ease the chore of driving ground rods.
- Compact, safe, easy to handle and store.
- Enables a workman to drive an 8' rod while standing on the ground.
- The 930UT features hand guards.
- 1/2", 5/8" and 3/4" ground rods.

<b>No. 930</b>	Ground rod driver	Wt. 20.0 lb.
<b>No. 930UT</b>	Ground rod driver with hand guard	Wt. 24.0 lb.

# CUTTERS AND URD DISCONNECT TOOL

Porter ratchet cutters use the combination ratchet and chain for smooth, progressive cuts. The handles are insulated and factory tested. Parts are available for field repairs.



**8690FH**

## 8690FH

- A 29 1/4" cutter for shearing cuts on ACSR and common steel.

**No. 8690FH**      13/16" jaw opening      Wt. 12.25 lb.



**8690CK**

## 8690CK

- A rugged 28", extra-duty cutter for EHS guy strand. The jaws hold the wire for square, clean cuts.

**No. 8690CK**      7/16" jaw opening      Wt. 11.0 lb.



**BC18F**



**BC24F**

## CUTTERS WITH FIBERGLASS HANDLES

- Handles are tested to 100kv per foot.

**No. BC18F**      18" length, 3/8" capacity      Wt. 4.5 lb.

**No. BC24F**      24" length, 7/16" capacity      Wt. 4.5 lb.



**RJL1967RCP**

## URD DISCONNECT TOOL

- Original LeVesque URD disconnect featuring three jaw operation and a pusher rod for smooth disconnects. It is done with a minimum of strain and chafing on the semi-conductor. It tests at 100 kV per foot.
- The standard length is 5'. Other lengths are available on request.

**No. RJL1967RCP**      Tool      Wt. 10.5 lb.


**No. 1967B**      Carrying case      Wt. 1.25 lb.



# SWITCH STICKS AND SHOTGUN STICKS

## HASTINGS HOT STICKS

- Recognizable by their bright yellow color, they are the finest insulated tools available to the professional lineman.

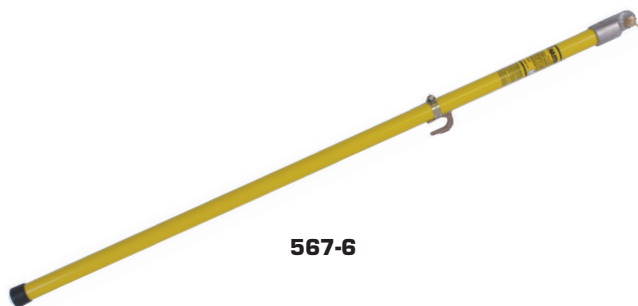

567-6

## FIXED LENGTH UNIVERSAL HEAD SWITCH STICKS

- These fixed length sticks have a universal head for use with most hot stick accessories.
- Stick Hanger is included.

<b>No. 567-6</b>	6' length	Wt. 1.4 lb.
<b>No. 567-8</b>	8' length	Wt. 2.6 lb.
<b>No. 567-10</b>	10' length	Wt. 3.3 lb.
<b>No. 567-12</b>	12' length	Wt. 4.0 lb.



1901-6



UNIVERSAL OPTION

BOTTOM BREAK HOOK OPTION


## SHOTGUN STICKS

- Shotgun sticks with eternal operating rods, hanger hook, and end caps.

<b>No. 1901-6</b>	6' - 6" length	Wt. 4.5 lb.
<b>No. 1901-10</b>	10' - 6" length	Wt. 7.2 lb.

## TELESCOPING SWITCH STICKS

- Hastings Tel-O-Pole sticks feature the easy to hold sure lock triangle shape
- Fluorescent green tip section with foam core

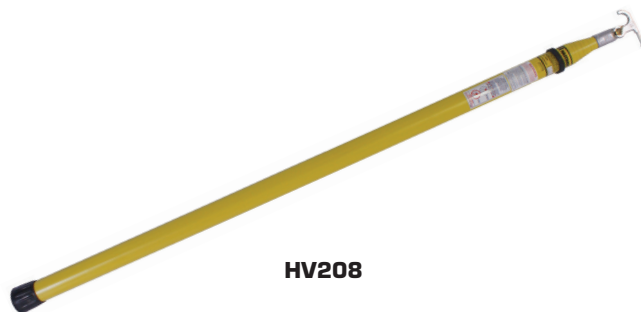

HV208

## STANDARD DUTY TEL-O-POLE II

- The "No Twist" stick.

	EXTENDED LENGTH	RETRACTED LENGTH	WT.
<b>No. HV208</b>	8'	26"	3.0 lb.
<b>No. HV212</b>	12' - 7"	58"	3.7 lb.
<b>No. HV225</b>	25' - 6"	64"	8.1 lb.
<b>No. HV230</b>	30'	66"	10.0 lb.
<b>No. HV235</b>	35'	68"	12.1 lb.



SH216

## HEAVY DUTY TEL-O-POLE

	EXTENDED LENGTH	RETRACTED LENGTH	WT.
<b>No. SH216</b>	9' - 13' - 17'	58 1/8"	4.8 lb.
<b>No. SH200</b>	13' - 17.5' - 21.5'	60"	6.57 lb.
<b>No. SH230</b>	13'-17.5'-21.5'-26'-30'	63 3/8"	10.3 lb.

**i** Hot Stick accessories available upon request. Sticks over 5' will be shipped via motor freight. Other length sticks available upon request.

# ELECTRICIAN'S/INSTALLERS HOLSTERS, AND BELTS

## HOLSTERS

Bashlin holsters put your tools where you want them, within easy reach. They are designed with the worker in mind and made with only the highest quality leathers and the finest craftsmanship.

**These holsters are not for use on linemen's tool belts.**



**111YS**



**111YSX**

### 111YS

- Sturdy holster with a harness leather back.

**No. 111YS** 9 1/4" x 10 1/2" Wt. 1.25 lb.  
**No. 111YSX** 9 1/4" x 10 1/2" - black Wt. 1.25 lb.



**111JBS**



**111JBSX**

### 111JBS

- Built from select leathers and is made to last.

**No. 111JBS** 8 1/2" x 9" x 4" Wt. 1.25 lb.  
**No. 111JBSX** 8 1/2" x 9" x 4" - black Wt. 1.25 lb.



**111JLMS**



**111JLMSX**

### 111JLMS

- If you are carrying a lot of tools, this may be the holster you need. It is our largest multipurpose holster.

**No. 111JLMS** 12" x 9" x 4 3/4" Wt. 2.0 lb.  
**No. 111JLMSX** 12" x 9" x 4 3/4" - black Wt. 2.0 lb.



**112HLS**



**112HLSX**

### 112HLS

- Harness leather backed groundman's holster for pliers, rule, screwdriver, and Channellock®.

**No. 112HLS** 7 1/2" x 12" Wt. 1.0 lb.  
**No. 112HLSX** 7 1/2" x 12" - black Wt. 1.0 lb.



**112CIL**



**112CILX**

### 112CIL

- Large cable installer with extra pockets.

**No. 112CIL** 8" x 12" Wt. 1.0 lb.  
**No. 112CILX** 8" x 12" - black Wt. 1.0 lb.



**625**

**630**

**628**

## ELECTRICIAN'S BELTS

- Add "X" to part number for black.
- Specify a size.

**No. 625** 1 3/4" russet leather utility belt Wt. 1.0 lb.  
**No. 628** 1 3/4" electrician's belt will carry a hammer, tape, and a knife with the holster Wt. 1.0 lb.  
**No. 630** Heavy duty 2" belt with a double tongue buckle. Wt. 1.25 lb.



## ELECTRICAL PERSONAL PROTECTIVE EQUIPMENT

**Bashlin Industries, Inc.** has been a major supplier of electrical personal protective equipment for many years. We offer rubber gloves, protectors, blankets, line hose and all of the accessories. We can also help you out with your special needs. Just give us a call.

# LINEMEN'S RUBBER GLOVES

High quality, natural rubber type I gloves have textured inside surface, "curved hand" comfort and flexibility.

## WHEN PURCHASING LINEMEN'S GLOVES, PLEASE CONSIDER:



**ONE FINGER  
MITTEN**

**STANDARD**

**LOW VOLTAGE**

## STYLE:

- Available in standard, bell cuff, one finger mittens and special order glove.



## GLOVE LENGTH:

- **CLASS 00, 0:** 10 1/2", 14"
- **CLASS 1, 2:** 14", 16", 18"
- **CLASS 3:** 16", 18"
- **CLASS 4:** 18"

## VOLTAGE RATING:

CLASS	LABEL	COLOR	MAXIMUM USAGE	AC TEST VOLTAGE
00	Beige		500v	2,500v
0	Red		1,000v	5,000v
1	White		7,500v	10,000v
2	Yellow		17,500v	20,000v
3	Green		26,500v	30,000v
4	Orange		36,000v	40,000v

## ❓ DID YOU KNOW?

OUR GLOVES ARE 100% TESTED FOR VISUAL FLAWS AND IMPERFECTIONS, AND ARE ELECTRICALLY TESTED PER ASTM STANDARDS. IF REQUESTED, IN SERVICE DATING CAN BE MARKED ON THE GLOVES. CERTIFIED THIRD PARTY TESTING BY A NAIL CERTIFIED LAB IS AVAILABLE ON REQUEST.



## COLORS:

- Manufactured in solid colors or two contrasting colors for easier inspection. The lighter color is inside and the black is on the outside. Two color gloves are normally Class 1 and higher.



## SIZE:

- Sized according to the circumference of the hand below the base of the fingers, on a line parallel to the base of the finger crotches, passing through the thumb crotch. Add 1" to the measurement for the proper size.

## ORDER NUMBER/SPECIFICATIONS:

	MAX. USAGE	CLASS	AC TEST VOLTAGE	COLOR	SIZE
<b>No. 1100Y</b>	500v	00	2,500	Yellow	10 1/2"
<b>No. 110Y</b>	1,000v	0	5,000	Yellow	10 1/2"
<b>No. 140Y</b>	1,000v	0	5,000	Yellow	14"
<b>No. 14-10B</b>	7,500v	1	10,000	Black	14"
<b>No. 14-20B</b>	17,000v	2	20,000	Black	14"
<b>No. 16-20B</b>	17,000v	2	20,000	Black	16"
<b>No. 18-20B</b>	17,000v	2	20,000	Black	18"
<b>No. 14-20YB</b>	17,000v	2	20,000	Yellow/Black	14"
<b>No. 16-20YB</b>	17,000v	2	20,000	Yellow/Black	16"
<b>No. 18-20YB</b>	17,000v	2	20,000	Yellow/Black	18"
<b>No. 16-30YB</b>	26,500v	3	30,000	Yellow/Black	16"
<b>No. 18-30YB</b>	26,500v	3	30,000	Yellow/Black	18"
<b>No. 18-40B</b>	36,000v	4	40,000	Black	18"
<b>No. 18-40YB</b>	36,000v	4	40,000	Black	18"

# LEATHER PROTECTOR GLOVES AND LINERS



1050

1057



1200

910/999

## KUNZ LEATHER PROTECTOR GLOVES

- Bashlin offers the Kunz protectors for primary (high voltage) and secondary (low voltage) linemen's gloves.
- Made in the U.S.A. Bashlin offers the following protectors:
  - **1050 Series:** cream cowhide (primary)
  - **1057 Series:** bucktan cowhide (primary)
  - **1200 Series:** goatskin (primary)
  - **999 Series:** goatskin (secondary)
  - **910 Series:** goatskin (class 00)
- Made from 2.75 to 3.5 oz soft and pliable leather. The cowhide is popular and long wearing. The goatskin offers the best dexterity.
- Protectors for one finger mittens and bell cuff gloves are also available. Contact customer service for ordering information.
- Order by rubber glove size. Bashlin offers whole sizes only. Round half sizes up to the next whole size for proper fit. For 40KV gloves, add 1 full size for proper fit.

### FOR EXAMPLE:

Linemen's glove size 9 1/2 = protector size 10

Linemen's glove size 10 = protector size 10

## ORDER NUMBER/SPECIFICATIONS:

	USAGE/ VOLTAGE	O.A.L. LENGTH/STYLE	MATERIAL	WT.
<b>No. 910</b>	Low	8" with strap	Goatskin	0.4 lb.
<b>No. 999S</b>	Low	9" with strap	Goatskin	0.4 lb.
<b>No. 999</b>	Low	9"	Goatskin	0.4 lb.
<b>No. 1050-3</b>	High	12"	Cream Cowhide	0.6 lb.
<b>No. 1200-3</b>	High	12"	Goatskin	0.6 lb.
<b>No. 1057-3</b>	High	12"	Buck Tan Cowhide	0.6 lb.
<b>No. 1050-3BC</b>	High	12" Bell Cuff	Cream Cowhide	0.6 lb.
<b>No. 1200-3BC</b>	High	12" Bell Cuff	Goatskin	0.6 lb.
<b>No. 1057-3BC</b>	High	12" Bell Cuff	Buck Tan Cowhide	0.6 lb.
<b>No. 1050-5</b>	High	14"	Cream Cowhide	0.7 lb.
<b>No. 1200-5</b>	High	14"	Goatskin	0.7 lb.
<b>No. 1057-5</b>	High	14"	Buck Tan Cowhide	0.7 lb.
<b>No. 1050-3-1F</b>	High	12" Mitten	Cream Cowhide	0.6 lb.
<b>No. 1050-3-1FBC</b>	High	12" Mitten/Bell Cuff	Cream Cowhide	0.7 lb.



580M

581K

## RUBBER GLOVE LINERS

- Glove liners warm the hand in winter and absorb summer perspiration. One size fits all.

<b>No. 580M</b>	Mitten liner	Wt. 0.1 lb.
<b>No. 581K</b>	Liner with knit cuff	Wt. 0.1 lb.



**WARNING:** Users are responsible for specifying the correct protector length. For minimum distance requirements between the glove gauntlet and protector cuff, see ASTM F496 Table 4. Failure to maintain the proper distance between the gauntlet and cuff may cause accidental injury or death.

# RUBBER SLEEVES, CLIMBER GUARDS, AND CLEANERS



RUBBER SLEEVE

## SALISBURY LINEMEN'S RUBBER SLEEVES

- Flexible curved arm sleeves.
- Bashlin offers black and yellow/black sleeves.

	CLASS	TEST VOLTAGE	COLOR	LENGTH
<b>No. SLR-10Y</b>	1	10,000v	Yellow	26 1/2"
<b>No. SLL-10Y</b>	1	10,000v	Yellow	28"
<b>No. SLXL-10Y</b>	1	10,000v	Yellow	29 1/2"
<b>No. SLR-20B</b>	2	20,000v	Black	26 1/2"
<b>No. SLL-20B</b>	2	20,000v	Black	28"
<b>No. SLXL-20B</b>	2	20,000v	Black	29 1/2"
<b>No. SLR-20YB</b>	2	20,000v	Yellow/Black	26 1/2"
<b>No. SLL-20YB</b>	2	20,000v	Yellow/Black	28"
<b>No. SLXL-20YB</b>	2	20,000v	Yellow/Black	29 1/2"
<b>No. SLR-30Y</b>	3	30,000v	Yellow	26 1/2"
<b>No. SLL-30Y</b>	3	30,000v	Yellow	28"
<b>No. SLXL-30Y</b>	3	30,000v	Yellow	29 1/2"

**Sleeve Sizing:** Measure the distance from the top of the shoulders (between the base of the neck and the shoulder bone) to the wrist bone.



Yellow and red sleeves are available upon request. Contact us for complete information.



SH1



SS2



SF4

## SLEEVE ACCESSORIES

<b>No. SH1</b>	Harness (1 required)	Wt. .25 lb.
<b>No. SS2</b>	Straps (1 pair required)	Wt. .20 lb.
<b>No. SF4</b>	Screw type fasteners (4 in package)	Wt. .10 lb.



805S

## GLOVE DUST

- Bashlin's glove dust lubricates while it absorbs moisture and perspiration. It will not damage natural rubber gloves.

<b>No. 805-4</b>	Glove Dust (4 - 1 quart)	Wt. 5.5 lb.
<b>No. 805S</b>	Dust filled shaker only (6 oz.)	Wt. 1.0 lb.

# GROUNDING EQUIPMENT AND POLE BAND



719



## POLE BAND

- This is a quick and easy way of marking and tagging lines during storms and routine switching. The band is easy to spot and holds a card in a weather resistant pouch with all of the necessary information.
- Secures to pole using Hook-N-Loop.

<b>No. 719</b>	"WORKER ON LINE"	Wt. 2.0 lb.
<b>No. 719-CAUTION</b>	"CAUTION"	Wt. 2.0 lb.

## GROUNDING EQUIPMENT

Contact Bashlin for your grounding needs. We offer 2/0 cable and a variety of standard clamps. In addition we can help you select the correct equipment for your particular requirements.

**Please provide the following information and we will quote a price:**

- Location/apparatus to ground
- Clamp design and size
- Cable length
- System fault current



930T

## TRUCK GROUND

- This device will provide a quick, temporary ground when one is needed.
- A 5' rod is threaded into a ground rod driver.
- The driver can then be used to drive and remove the temporary ground.
- This device works in most rocky or frozen soil.
- The cable and clamps are not included.

<b>No. 930T</b>	5/8" threaded driver only	Wt. 19.0 lb.
<b>No. 930TG</b>	Threaded driver with a 5' rod	Wt. 23.0 lb.
<b>No. GR558</b>	5/8" threaded ground rod.	Wt. 4.0 lb.

# LINEMEN'S BLANKETS, PVC SHEETING



**LB127/LBS136**

## LINEMEN'S BLANKETS

- These linemen's blankets are available in Type I natural rubber and Type II ozone resistant synthetic material.
- They meet or exceed all current ASTM specifications.

	TYPE	SIZE	COLOR	RATING	WT.
<b>No. LB127</b>	I	27" x 36"	Black	20,000v	6.25 lb.
<b>No. LB136</b>	I	36" x 36"	Black	20,000v	8.5 lb.
<b>No. LBS127</b>	II	27" x 36"	Orange	40,000v	6.25 lb.
<b>No. LBS136</b>	II	36" x 36"	Orange	40,000v	8.5 lb.



**LBSV118**

## ZIP-ON BLANKETS

- These Type II blankets use Hook-N-Loop fasteners for easy application. They are ideal for cross arm braces and primary elbows.

	SIZE	COLOR	RATING	WT.
<b>No. LBSV118</b>	18" x 36"	Orange	40,000v	1.75 lb.
<b>No. LBSV127</b>	27" x 36"	Orange	40,000v	8.5 lb.



**LBS136SL**

## SLOTTED LINEMEN'S BLANKET

- These Type II blankets are available with 2" or 4 1/2" center holes.

	CTR. HOLE	SIZE	COLOR	RATING	WT.
<b>No. LBS136SL</b>	2"	36" x 36"	Orange	40,000v	8.0 lb.
<b>No. LBS136SL-4</b>	4 1/2"	36" x 36"	Orange	40,000v	8.0 lb.



**PVC136-50**

## PVC INSULATING SHEETING

- Designed for one use only. This is an excellent alternative to standard linemen's blankets for low voltage applications.
- Tested to 10kV and meets all of the appropriate ASTM standards.

<b>No. PVC136-50</b>	Sheeting - 48" x 50" roll	Wt. 61.0 lb.
<b>No. PVC136FB</b>	Fiber storage box	Wt. 19.0 lb.
<b>No. PVC136-30</b>	36" x 30' roll	Wt. 50.0 lb.



# BLANKET CLAMPS AND DIELECTRIC MATTING



**LBCP160**

## CLAMPS

- Clamps reduce mechanical wear on blankets.

**No. LBCP160**     9 1/2" nylon clamp     Wt. 0.5 lb.



**700TF**

## 700TF - THE FINGER

- The Finger is a safe and convenient way to lubricate your hoses. Simply clip can of silicone spray into the metal clips. When you pull your hose over "The Finger," the hose is spread, and the spray is directed into the inner skirt of the hose.
- The Finger can be mounted in your vise, fixed to the tailboard of your truck or permanently mounted inside the bin door.

**No. 700TF**     The Finger     Wt. 1.6 lb.

## NOTES:

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

# INSULATING LINE HOSE, CONNECTORS, COVERS

## LINE HOSE

- Bashlin offers Type II ozone resistant line hose in straight or connector end design. This conventional line hose is available in 4 1/2' and 6' lengths.



555-24-45



550-25-45

### STRAIGHT LINE HOSE:

	SIZE	CLASS	WT.
<b>No. 550-25-45</b>	1 1/4" x 4 1/2'	2	5.75 lb.
<b>No. 550-25-6</b>	1 1/4" x 6'	2	6.0 lb.
<b>No. 550-50-45</b>	1 1/2" x 4 1/2'	3	7.0 lb.
<b>No. 550-50-6</b>	1 1/2" x 6'	3	7.0 lb.

### CONNECTOR END LINE HOSE:

	SIZE	CLASS	WT.
<b>No. 555-25-45</b>	1 1/4" x 4 1/2'	2	7.0 lb.
<b>No. 555-25-6</b>	1 1/4" x 6'	2	7.25 lb.
<b>No. 555-50-45</b>	1 1/2" x 4 1/2'	3	8.0 lb.
<b>No. 555-50-6</b>	1 1/2" x 6'	3	10.75 lb.



550-25

550-50C

### LINE HOSE CONNECTORS:

	SIZE	CLASS	WT.
<b>No. 550-25C</b>	1 1/4" x 12"	2	3.25 lb.
<b>No. 550-50C</b>	1 1/2" x 12"	3	3.0 lb.



560-2

## INSULATOR COVERS

- Salisbury Type II Insulator Covers for conventional line hose are available in 1", 1 1/4", and 1 1/2" diameters.

	INSULATOR TYPE	LINE HOSE DIAMETER	CLASS	WT.
<b>No. 560-2</b>	55-4	1"	2	7.0 lb.
<b>No. 560-3</b>	55-5	1 1/4" - 1 1/2"	3	8.0 lb.



2464



2464

## POLE GUARDS


- Made of high impact grade ABS plastic, the natural spring action holds this temporary insulation in place.
- Maximum use voltage should not exceed 26kV to ground, 44kV phase to phase, and limited to "brush" contact.

<b>No. 2464</b>	12" diagonal x 4' long	Wt. 15.0 lb.
<b>No. 2466</b>	12" diagonal x 6' long	Wt. 22.0 lb.
<b>No. 216</b>	Pole guard bag 12" x 78"	Wt. 4.0 lb.

# TRAVELING GROUNDS

The Bashlin 1590C and 336A traveling grounds reduce the possibility of electric shock due to accidental contact with energized conductors during stringing operations.

They are heavy duty units designed for conductors measuring up to and including 336MCM and 1590MCM respectively.

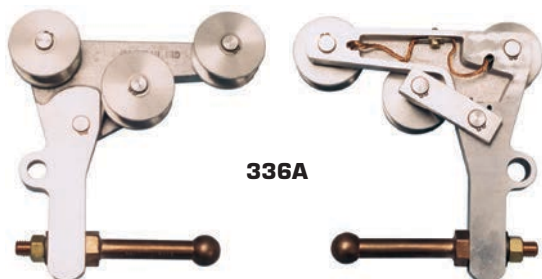


## 336A

No. 336A

Traveling ground


Wt. 3.0 lb.

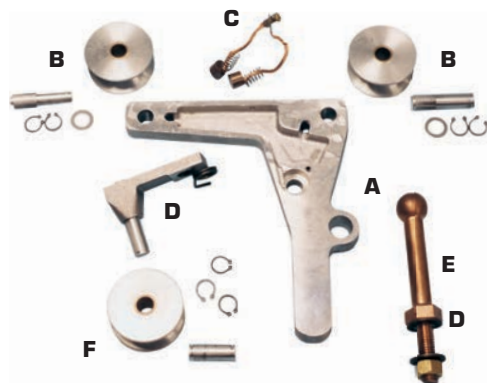

## 336A REPLACEMENT PARTS

- This unit is designed for field repairs.
- The replacement parts are packaged to allow complete, easy replacement.

<b>No. 336A-1</b>	<b>(A)</b> Frame	Wt. 0.6 lb.
<b>No. 336A-2</b>	<b>(B)</b> Frame sheaves (2) with axle bolts, washers, and snap rings	Wt. 0.6 lb.
<b>No. 336A-3</b>	<b>(C)</b> Brush set (2 pc.) with springs and screws	Wt. 0.1 lb.
<b>No. 336A-4</b>	<b>(D)</b> Tension arm assembly, including spring, axle, snap ring, and washer (sheave is not included)	Wt. 0.7 lb.
<b>No. 336A-5</b>	<b>(E)</b> Ground stud (only)	Wt. .75 lb.
<b>No. 336A-6</b>	<b>(F)</b> Tension arm sheave with axle bolt, washer, and snap rings	Wt. 0.4 lb.
<b>No. 336A-8</b>	Carrying case (not pictured)	Wt. 0.4 lb.

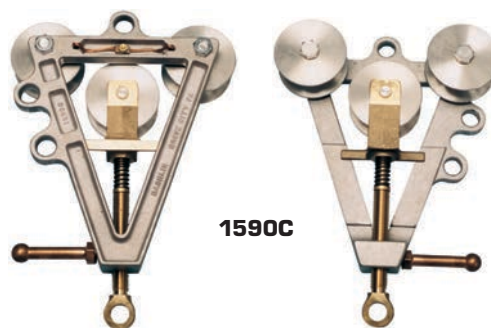


## 1590C

No. 1590C

Traveling ground

Wt. 12.0 lb.

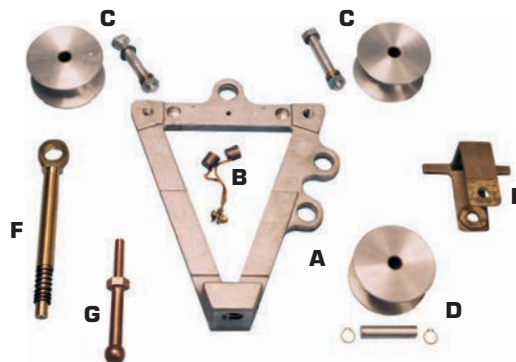

## 1590C REPLACEMENT PARTS

- This unit is designed for field repairs.
- The replacement parts are packaged to allow complete, easy replacement.

<b>No. 1590C-1</b>	<b>(A)</b> Frame with heli-coil	Wt. 3.75 lb.
<b>No. 1590C-2</b>	<b>(B)</b> Brush set (2 pc.) with springs and screws	Wt. 0.2 lb.
<b>No. 1590C-3</b>	<b>(C)</b> Frame sheaves (2 pc.) with axle, washers, and snap rings	Wt. 1.5 lb.
<b>No. 1590C-4</b>	<b>(D)</b> Yoke sheave (1 pc.) with axle, washers, and snap rings	Wt. 0.7 lb.
<b>No. 1590C-5</b>	<b>(E)</b> Yoke (only)	Wt. 1.5 lb.
<b>No. 1590C-6</b>	<b>(F)</b> Eyebolt assembly with spring, snap ring, and thrust washer	Wt. 1.5 lb.
<b>No. 1590C-7</b>	<b>(G)</b> Ground stud (1)	Wt. .75 lb.
<b>No. 1590C-8</b>	Carrying case (not pictured)	Wt. 0.5 lb.



**WARNING:** Test results have demonstrated the **336A** meets the short circuit requirements to be rated **Grade 3** per ASTM F885 requirements.

Test results have demonstrated the **1590C** meets the short circuit requirements to be rated **Grade 5** per ASTM F885 requirements.

Do not use these units unless the rating falls within the energy for the system on which the ground is used.

**NOTES:**

A series of horizontal dotted lines providing a space for handwritten notes.



### WORK GLOVES, PPE AND TRAINING

In an effort to provide for the complete needs of linemen, **Bashlin Industries, Inc.** offers products for comfort and protection from the elements. This includes top quality work gloves, and hard hats.

# KUNZ WORK GLOVES

Bashlin offers quality Kunz all leather work gloves. These gloves have been made in the USA since 1900. The Kunz glove features durable wear qualities and outstanding comfort. They are the choice, along with Bashlin products, for the professional lineworker.



556

956

## DRIVER'S GLOVE

- Developed as a quality alternative to the imported canvas-leather gloves used in light work and by machine operators.
- A major utility found that even with a higher initial cost, the wear qualities of the 956 made it an economical alternative to less expensive products.
- Specify size.

<b>No. 556</b>	Cowhide driver's glove 4" cuff	Wt. 0.5 lb.
<b>No. 956</b>	Cowhide driver's work glove	Wt. 0.5 lb.
<b>No. 956E</b>	Buckskin driver's work glove	Wt. 0.5 lb.



815

## KNEE PADS

- This is the original "Knee-Pro" protector. It features 1/2" foam pads, a thick plastic shell, and non-skid grips for extra comfort.

<b>No. 815</b>	Knee pads	Wt. 1.0 lb.
----------------	-----------	-------------



148

150

120

## HEAVY DUTY WORK GLOVES

- The Kunz work glove features reinforced thumb straps and outside seams with tip protectors.
- Specify size.

<b>No. 148</b>	Medium buckskin	Wt. 1.0 lb.
<b>No. 150</b>	Heavy buckskin	Wt. 1.0 lb.
<b>No. 120</b>	Heavy top grain cowhide	Wt. 1.0 lb.



### PLEASE PROVIDE GLOVE SIZE.

<b>SMALL:</b> 8 - 8 1/2	<b>MEDIUM:</b> 9 - 9 1/2
<b>LARGE:</b> 10 - 10 1/2	<b>X-LARGE:</b> 11 - 11 1/2

Determine your glove size by measuring the circumference of the hand below the base of the fingers as shown and add 1" to the measurement.

**KUNZ GLOVE  
COMPANY INC.**  
MADE IN THE USA • SINCE 1900



## 76PAT-RT PATRIOT RESCUE TRAINER

The Bashlin 76PAT-RT Patriot™ Rescue Trainer is designed for use in hurt man pole top rescue training. It is designed to position a manikin on a pole to simulate an unresponsive line worker that was using a Bashlin 76PAT Patriot™ WPFDR. Additionally, it is designed with an extra specified length of high visibility blaze orange inner rope that, after cutting in a rescue training exercise, can be quickly and easily replaced so that a subsequent training session can be conducted.

**No. 76PAT-RT-100**

Rescue trainer with 100' rope and bag.

Wt. 15.00 lb.



### WARNING

Not for human support. This is not a WPFDR. Use during training to support an approved manikin only.

**CONTACT US FOR  
MORE INFORMATION**

USE YOUR PHONE TO SCAN THE QR CODE FOR MORE INFO!



# RODEO, TRAINING PRODUCTS

Bashlin offers the official training products used at the National Linemen's Rodeo. We have been a proud sponsor and supporter of this event since 1987.



## POLE TOP RESCUE STRAP

- This unit helps the lineworker truly simulate cutting a victim down from a pole without destroying perfectly good equipment.
- It holds a rescue dummy in place so the rescue can be performed. Note: One set of 57A inserts are included with this unit. Additional inserts must be purchased separately.

**No. 57N** Rescue strap assembly. Two short snap/buckle sections, one double buckle section to go around the pole, and two inserts Wt. 6.0 lb.

**No. 57A** Replacement insert. One insert is 12" long with 4 holes, so it can be cut up to 3 times Wt. 0.5 lb.



## LINEMAN'S RODEO TOOLS

<b>No. 650RDB</b>	Ditty bag	Wt. 0.2 lb.
<b>No. 650MB</b>	6" Canvas Mini Bucket	Wt. 0.2 lb.
<b>No. 650MB-C</b>	6" Canvas Mini Bucket (Camo)	Wt. 0.2 lb.
<b>No. 650MB-P</b>	6" Canvas Mini Bucket (Pink)	Wt. 0.2 lb.
<b>No. 650MB-O</b>	6" Canvas Mini Bucket (Orange)	Wt. 0.2 lb.
<b>No. 650MB-BX</b>	6" Canvas Mini Bucket (Black)	Wt. 0.2 lb.



RR165



632RR

## RESCUE RANDY

- Official rescue mannequin of the Linemen's Rodeo.
- Lifelike, durable, articulated joints and weight distribution.
- Great for pole top and bucket rescue.

**No. RR165** 165 lb. manikin Wt. 175.0 lb.

**No. 632RR** Waist belt for manikin Wt. 2.0 lb.

 Replacement parts for Rescue Randy are available. Contact customer service for information.



**WARNING:** The 57N is only for holding a manikin or weight in position. It is not for personnel support.



# HARD HATS/LINERS



ME3-Y

ME3-B

ME3-O

## ME3 HARD HAT

- Features a standard style brim and a ratchet adjustment.
- Available in white, yellow, orange or blue.

<b>No. ME3-W</b>	White hard hat	Wt. 1.0 lb.
<b>No. ME3-Y</b>	Yellow hard hat	Wt. 1.0 lb.
<b>No. ME3-O</b>	Orange hard hat	Wt. 1.0 lb.
<b>No. ME3-B</b>	Blue hard hat	Wt. 1.0 lb.



BE4-O

BE4-B

## BE4: FULL BRIM HARD HAT

- Especially popular in warmer climates.
- Features a full style brim and a ratchet adjustment.
- Available in white, yellow, orange or blue.

<b>No. BE4-W</b>	White hard hat	Wt. 1.0 lb.
<b>No. BE4-Y</b>	Yellow hard hat	Wt. 1.0 lb.
<b>No. BE4-O</b>	Orange hard hat	Wt. 1.0 lb.
<b>No. BE4-B</b>	Blue hard hat	Wt. 1.0 lb.



EL27B

## HAT LINERS

- Made of flame retardant, preshrunk cotton twill.
- Thermal lined and have elastic web chin straps.
- One size fits all.
- Made in the USA.

<b>No. EL27B-0</b>	Medium length extending below the collar	Wt. .25 lb.
<b>No. EL29B-0</b>	Extra length extending below the collar	Wt. 0.4 lb.
<b>No. EL23BFM-0</b>	Medium length with a face mask, held in place with velcro fasteners	Wt. 0.4 lb.

## HARD HAT ACCESSORIES

<b>No. ME91R</b>	Suspension (ratchet adjustment)	Wt. .25 lb.
<b>No. M94</b>	Chin strap	Wt. 0.4 lb.

# SAFETY BOOKLETS

## Important Safety Information for Users of Bashlin Personal Fall Protection Equipment Harnesses, Lanyards Anchorage Connectors



**⚠ - WARNING - ⚠**  
 For your personal safety, this booklet must be read and all of the information completely understood before using these products.



No. FPPE-405-B Rev. 8-22



## Important Safety Information for Users of Lineman Tool Belts Lineman Climbing Harnesses Pole Straps Adjustable Positioning Lanyards Auxiliary Positioning Belts



**⚠ - WARNING - ⚠**  
 For your personal safety, this booklet must be completely read and all of the information understood completely before using these products.  
 For information regarding Wood Pole Fall Restricting products, see the information included with the product. See our catalog or [www.bashlin.com](http://www.bashlin.com) for leather care and cleaning products.



No. BLBH 514 Rev. 7-22



## Important Safety Information for Users of Bashlin Climbers and Accessories



**⚠ - WARNING - ⚠**  
 For your personal safety, this booklet must be read and all of the information completely understood before using these products.



No. BLCL 514, Rev. 4-21



## Important Safety Information for Users of Bashlin Aerial Self-Rescue Devices Suspension Trauma Relief Products Bucket Rescue Kits



**⚠ - WARNING - ⚠**  
 For your personal safety, this booklet must be read and all of the information completely understood before using these products.



No. BREO Rev. 1-21



## Important Safety Information for Users of BASHLINPATRIOT™



**⚠ - WARNING - ⚠**  
 For your personal safety, this booklet must be completely read and all of the information understood completely before using these products.  
 For information regarding Wood Pole Fall Restricting products, see the information included with the product. See our catalog or [www.bashlin.com](http://www.bashlin.com) for leather care and cleaning products.



No. BPM Rev. 10-19



## Important Safety Information for Users of Bashlin Arborist Saddles



**⚠ - WARNING - ⚠**  
 For your personal safety, this booklet must be read and all of the information completely understood before using these products.



No. ARB Rev. 03-21



# BASHLIN INDUSTRIES, INC. | PRODUCT INDEX

## A

Adjustable Rope Lanyards ..... 31, 32  
 Aerial Bags ..... 73, 74  
 Anchor Straps ..... 59  
 Anchorages,  
 Care and Maintenance ..... 61  
 Anchorages ..... 59  
 Arborist Saddles ..... 14, 15  
 Auger Wind Ups ..... 81

## B

Back Packs ..... 68  
 Bags, Rodeo Ditty ..... 104  
 Bags, Back Packs ..... 68  
 Bags, Blanket ..... 71  
 Bags, Gear ..... 69  
 Bags, Glove and Sleeve ..... 70  
 Bags, Ground Set ..... 72  
 Bags, Hot Stick ..... 72  
 Bags, Nut and Bolt ..... 9, 17, 18  
 Bags, Roller ..... 69  
 Bags, Line Hose ..... 71  
 Belts, 2 D-Ring ..... 12  
 Belts, 4 D-Ring ..... 8, 9, 10, 11  
 Belts, Auxiliary Positioning ..... 16  
 Belts, Care and Maintenance ..... 37, 106  
 Belts, Electrician ..... 90  
 Belt, Sizing ..... 6  
 Belts, Styles ..... 7  
 Belts, Supporter ..... 16  
 Belts, Suspenders ..... 16  
 Belts, Groundman ..... 90  
 Blanket Bags ..... 71  
 Blanket Canister ..... 71  
 Blanket Clamps ..... 97  
 Blanket Rolls ..... 71  
 Blankets, Rubber ..... 96  
 Blocks ..... 84  
 Bucket Cover ..... 77  
 Bucket Hooks ..... 76, 77  
 Bucket Knuckle ..... 76  
 Bucket Rescue Equipment ..... 63, 64, 65

Buckets ..... 73, 74  
 Bug wrenches ..... 34

## C

Carabiners ..... 60  
 Chain Hoist ..... 86  
 Chain Saw Holder ..... 77  
 Channel Locks ..... 35  
 Climber Accessories ..... 28, 29  
 Climber Pad, Hook-N-Loop ..... 13, 26  
 Climber Pads ..... 26, 27  
 Climber Parts ..... 28, 29  
 Climbers, Aluminum ..... 23, 25  
 Climbers, Steel ..... 23, 24, 25  
 Climbers ..... 23, 24, 25  
 Climbing Harnesses ..... 48, 49  
 Confined Space Harnesses ..... 50  
 Connectors ..... 59  
 Cross Arm Iron ..... 87  
 Cutters ..... 88

## D

Descenders ..... 60  
 Dielectric Harnesses ..... 47

## F

Fall Protection Information ..... 40, 41  
 Fall Restriction Device ..... 30  
 Folding Rules ..... 36

## G

Gaff Gauge ..... 29  
 Gaff Guards ..... 29  
 Gaff Shaping Kit ..... 29  
 Gaffs, Replacement ..... 29  
 Glove Bags ..... 70  
 Glove Dust ..... 94  
 Gloves, Kunz Work Gloves ..... 102  
 Gloves, Leather Protectors ..... 93  
 Gloves, Liners ..... 93  
 Gloves, Sizing ..... 92

Gloves, Driver ..... 102  
 Ground Rod Driver ..... 87  
 Grounding Equipment ..... 95, 99

## H

Hammers ..... 36  
 Hand Tools ..... 34, 35, 36  
 Handline Block ..... 84  
 Handline Carrier ..... 22, 84  
 Handline Hooks ..... 84  
 Handline Parts ..... 84  
 Handlines ..... 84  
 Hard Hat Accessories ..... 105  
 Hard Hat Liner ..... 105  
 Hard Hats ..... 105  
 Harness, Bag ..... 49  
 Harness, Back Attachments ..... 42  
 Harness, Care and Maintenance ..... 41  
 Harness, Options ..... 43  
 Harness, Sizing ..... 43  
 Harness, Styles ..... 44-50  
 Heel Cover ..... 29  
 Hoists ..... 86  
 Holsters, Bell Wrench ..... 21  
 Holsters, Electrician ..... 89  
 Holsters, Groundman ..... 22  
 Holsters, Lineman ..... 19, 20, 21  
 Holsters, Lowell Wrench ..... 21  
 Holsters, Skinning Knife ..... 21  
 Holsters, Accessories ..... 21  
 Hot Stick Bags ..... 72  
 Hot Sticks ..... 89

## I

Insulator Covers ..... 98



# BASHLIN INDUSTRIES, INC. | PRODUCT INDEX

## K

Klein Bell Wrench..... 34  
 Klein Adjustable Wrenches ..... 34  
 Klein Lineman Pliers ..... 35  
 Knee Pads..... 102  
 Knives ..... 35

## L

Ladder Snaphooks..... 60  
 Lanyard, Care and Maintenance ..... 58  
 Lanyard, Shock Absorbing ..... 51-56  
 Lanyard, Positioning ..... 57  
 Lanyard, Self Retracting ..... 54  
 Lanyard, Twin Leg..... 55, 56  
 Leather Care ..... 22  
 Line, Pilot ..... 85  
 Line, Pulling ..... 85  
 Line, Winch Lines ..... 85  
 Line Hose ..... 98  
 Line Hose Bags ..... 71  
 Line Hose Connectors..... 98  
 Line Hose Lubrication Tool..... 97  
 Lowell Ratchet Wrenches ..... 34

## P

Para-Pak..... 64  
 Patriot Rescue Trainer ..... 103  
 Pay-Out Reels ..... 87  
 Pilot Line ..... 85  
 Pole Band ..... 95  
 Pole Climbers..... 23,24  
 Pole Gaffs ..... 29  
 Pole Straps ..... 33  
 Pole Top Rescue Strap ..... 104  
 Pulling Grips ..... 86  
 Pulling Line ..... 85  
 PVC Insulating Sheeting..... 96

## R

Replacement Gaffs ..... 29  
 Rescue Equipment..... 63, 64, 65  
 Rescue Randy ..... 104  
 Rodeo Products ..... 104  
 Roller Bags ..... 69  
 Rope, Descent Device ..... 60  
 Rope Snaphooks..... 60

## S

Safety Booklets..... 106  
 Screwdrivers ..... 36  
 Self Rescue Equipment..... 62-65  
 Shotgun Sticks ..... 89  
 Skinning Knives ..... 35  
 Slack Blocks ..... 84  
 Sleeve Accessories..... 94  
 Sleeve Bags ..... 70  
 Sleeves, Rubber Lineman ..... 94  
 Slings..... 80-83  
 Splicers Bag ..... 73  
 Staple Sticks..... 36  
 Strap Hoist..... 86  
 Suspension Trauma ..... 62

## T

Tape Slings ..... 22  
 The Finger..... 97  
 Tool Apron..... 76  
 Tool Bags ..... 68, 73, 74  
 Tool Boards ..... 75, 76  
 Tool Snaps ..... 22  
 Tool Tray..... 76  
 Traveling Grounds..... 99  
 Tree Climbers..... 25  
 Tree Gaffs..... 29  
 Tree Saddles ..... 13, 14  
 Truck Ground ..... 95

## U

URD Disconnect Tool..... 88

## W

Winch Line ..... 85  
 Winch Line Maintenance ..... 85  
 Wire Basket ..... 87  
 WPFRD ..... 30  
 Wrenches..... 34



# BASHLIN INDUSTRIES, INC. | PART NUMBER INDEX

2.....	29	24RBR SERIES .....	70	76PAT.....	30
2SC .....	29	24SL SERIES .....	69	76PAT-OR .....	30
3.....	28	24SLGP SERIES.....	69	76PAT-ORC.....	30
4G .....	28	25A SERIES.....	17	76PAT-RT-100 .....	103
4HP .....	21	25AF .....	9	76PAT-T.....	30
4HPX.....	21	25AFM2 .....	9	78 SERIES.....	33
4STR.....	21	25AM2 SERIES.....	17	80.....	16
4T.....	28	25BS .....	18	80HDS.....	16
5.....	29	25KLBS .....	18	80X .....	16
8D .....	34	25PLS .....	18	81.....	16
10HBT .....	41, 49	25PS .....	18	81-1 .....	16
10S SERIES.....	68, 72	25R .....	18	83H2D.....	16
11BPD SERIES .....	68	26DRM.....	18	85N SERIES .....	28
11DC SERIES.....	69	26G .....	18	86N SERIES .....	28
12S SERIES.....	69	26L.....	18	87N SERIES .....	28
14.....	29	27.....	29	88.....	12
14 GLOVE SERIES.....	92	31 Series.....	22	884D .....	11
14ATS.....	28	32 Series.....	22	88BMX4D .....	11
14ATSB .....	28	32AR .....	22	88BMX4DCC.....	11
14P .....	29	33.....	22	88BMX4DMP.....	11
14T.....	29	33L.....	22	88FFX4D .....	8, 9
14TS .....	28	35GP .....	84	88GX4DCC.....	10
14TSB .....	28	35H .....	84	88GX4DMP .....	10
15.....	36	41NW-2HL.....	33	88MX4DCC.....	10
15FG .....	36	42NW-2HL.....	33	88MX4DMP .....	10
16- GLOVE SERIES .....	91	43NW-2HL.....	33	88UX4DCC.....	10
16ATS.....	28	44NW-2HL.....	33	88UX4DMP .....	10
16TS .....	28	47N-15.....	33	88X .....	12
18 GLOVE SERIES.....	91	47N-18.....	33	88X4D .....	11
18 SERIES BUCKETS .....	72	51N-2HL.....	33		
23 SERIES BUCKETS .....	72	52N-2HL.....	33		
24 SERIES .....	69	53N-2HL.....	33		
24HSC SERIES .....	71	54N-2HL.....	33		
24RBC SERIES .....	70	57 SERIES.....	104		



# BASHLIN INDUSTRIES, INC. | PART NUMBER INDEX

89N Series.....	28	111JBS.....	89	555 SERIES.....	98
100TDE.....	34	111JBSX.....	89	556 GLOVES.....	102
101TDE.....	34	111JLMS.....	89	560 SERIES.....	98
103TDE.....	34	111JLMSX.....	89	567 SERIES.....	89
105 PADS.....	26	111LWH.....	21	580M.....	93
110Y GLOVE SERIES.....	91	111LWHX.....	21	581K.....	93
1100Y GLOVE SERIES.....	91	111SK.....	21	600-12.....	36
111BWH.....	21	111SKX.....	21	600-4.....	36
111BWHX.....	21	111YS.....	89	600-6.....	36
111FLDSX.....	20	111YSX.....	89	600-8.....	36
111FLEX.....	20	112CIL.....	89	602A.....	91
111FLSX.....	20	112CILX.....	89	602AT.....	91
111FLSXE.....	20	112HLS.....	22, 89	602-7DD.....	36
111HE.....	19	112HLSX.....	22, 89	625.....	90
111HEX.....	19	120 GLOVE SERIES.....	102	628.....	90
111HLDS.....	19	130D PADS.....	27	630.....	90
111HLDS-S.....	20	140D PADS.....	27	639BBS.....	14
111HLDSE.....	19	140Y GLOVE SERIES.....	92	639BBL.....	14
111HLDSX.....	20	145 PADS.....	26	640BBS.....	15
111HLDSXE.....	20	148 GLOVE SERIES.....	102	640BBL.....	15
111HLDSX-S.....	20	150 GLOVE SERIES.....	102	632RR.....	104
111HLE.....	19	150-12.....	34	650MB.....	104
111HLEX.....	19	150V PADS.....	27	650RDB.....	104
111HLS.....	19	160N.....	12	656CM.....	12
111HLS-S.....	20	210 SERIES.....	71	656PX.....	12
111HLSX.....	19	212 SERIES.....	71	662.....	42
111HLSX-S.....	20	216.....	98	662AB.....	45
111HS.....	19	270B.....	72	662AC.....	45
111HSX.....	19	300A.....	86	662ACS.....	50
		300DA.....	86	662AD.....	45
		336A SERIES.....	99	662GA.....	45
		420G.....	35	662GD.....	45
		430G.....	35	662RA.....	45
		550 SERIES.....	98	662RD.....	45



# BASHLIN INDUSTRIES, INC. | PART NUMBER INDEX

662VA.....	46	724.....	76	960 SERIES.....	81
662VD.....	46	726.....	74	960Y.....	81
683GA.....	44	727L.....	76	962 SERIES.....	81
683GD.....	44	731CS.....	77	962NWTS.....	80
683XA.....	44	744.....	77	962Y-CL.....	83
683XAP.....	49	745.....	77	965 SERIES.....	81
683XB.....	44	750DE SERIES.....	85	965Y-CL.....	83
683XBP.....	49	750MP SERIES.....	85	999 GLOVE SERIES.....	93
683XC.....	44	770R.....	81	1050 GLOVE SERIES.....	93
686XC6.....	64	770RDE.....	81	1057 GLOVE SERIES.....	93
683XC6EQT.....	50	770W.....	81	1200 GLOVE SERIES.....	93
683XCP.....	49	804.....	22	1511N.....	12
683XD.....	44	806 SERIES.....	22	1515PX4D.....	10
683XDP.....	49	809.....	22	1515PX4DCC.....	10
683XDT.....	50	815.....	102	1550-4.....	35
696NW.....	63	884D.....	11	1590C SERIES.....	99
700BK.....	76	900 SERIES.....	87	1671-10.....	86
700FP.....	63	900-6.....	36	1672-10.....	86
700FWI.....	63	901LF.....	87	1685-20.....	86
700TF.....	97	901TI.....	87	1685-31.....	86
703.....	59	902 SERIES.....	86	1686-10.....	86
703R.....	59	903LT.....	85	1686-20.....	86
703R-2D.....	59	910 GLOVE SERIES.....	92	1901 SERIES.....	89
706.....	73	930.....	87	1967B.....	72, 88
706-20.....	74	930T.....	95	2002NWB SERIES.....	51
706S.....	73	930TG.....	95	2004NWB SERIES.....	51
708 SERIES.....	75, 76	930UT.....	87	2005NWB SERIES.....	51
712 SERIES.....	75	940 SERIES.....	84	2011 SERIES.....	80
717.....	73	945 SERIES.....	84	2011P SERIES.....	59
719.....	95	950 SERIES.....	80		
719-CAUTION.....	95	951 SERIES.....	80		
721AM.....	74	952 SERIES.....	80		
722AM.....	74	953 SERIES.....	80		
723AM.....	74	956 GLOVE SERIES.....	102		



# BASHLIN INDUSTRIES, INC. | PART NUMBER INDEX

2011P1 SERIES.....	59	4002NW SERIES.....	57	BE4 SERIES.....	104
2012 SERIES.....	80	4004NW SERIES.....	57	BED662VDEF.....	50
2012P SERIES.....	59	4005NW SERIES.....	57	BEDQ683XD1.....	50
2027 SERIES.....	55	4016 SERIES.....	32	BHP.....	29
2028 SERIES.....	55	4017NW SERIES.....	57	BN9327.....	54
2028NWB SERIES.....	55	4018 SERIES.....	31	BSH20.....	77
2302 SERIES.....	53	4019 SERIES.....	31	BSH50.....	77
2305 SERIES.....	53	4950-58Y.....	81	BSK SERIES.....	35
2306 SERIES.....	53	4951-58Y.....	81	BSS2000.....	36
2315 SERIES.....	53	5395A.....	60	BSS2001.....	36
2317 SERIES.....	53	8690CK.....	88	BW SERIES.....	34
2327 SERIES.....	56	8690FH.....	88	D2000-9NE.....	35
2328 SERIES.....	56	44005.....	35	D2000-9NETH.....	35
2464.....	98	B1972F.....	29	D213-9NE.....	35
2466.....	98	B1972G.....	29	D507 SERIES.....	34
2802 SERIES.....	52	B6232.....	36	DEQ662HA.....	47
2804 SERIES.....	52	B662AA.....	45	DEQ683XA.....	47
2805 SERIES.....	52	B662AD.....	45	DEQ683XD1.....	47
2815 SERIES.....	52	B683XA.....	44	DL11DC-R SERIES.....	69
2817 SERIES.....	52	B683XD.....	44	DL11DC-RB SERIES.....	69
2827 SERIES.....	56	B809.....	36	DSD30.....	60
2828 SERIES.....	56	B832.....	36	EL23BFM.....	105
3004.....	60	BC136 SERIES.....	71	EL27B.....	105
3006.....	60	BC18F.....	88	EL29B.....	105
3006K.....	60	BC24F.....	88	FE683EZWTR.....	49
3007A.....	60	BD12 SERIES.....	24	FE700BMSRSC.....	65
3008A.....	60	BD12C SERIES.....	24	FE700SRKSC.....	65
3146.....	34	BD12L SERIES.....	24	HV SERIES.....	89
3550.....	84	BD14B SERIES.....	23	LB SERIES.....	96
		BD14BT SERIES.....	25	LBCP160.....	97
		BD16B SERIES.....	23	LBS SERIES.....	96
		BD16BC SERIES.....	23	LBSV SERIES.....	96
		BD16BCT SERIES.....	25	LMG SERIES.....	85
		BD16BT SERIES.....	25	M94.....	105





# BASHLIN INDUSTRIES, INC. | PART NUMBER INDEX

ME3 SERIES .....	105
ME91R .....	105
PA2000 .....	86
PVC SERIES .....	96
Q662ZA .....	49
Q664T .....	48
Q83H2D.....	16
Q88BMX4D.....	11
Q88BMX4DCC .....	11
Q88BMX4DP .....	11
Q88GX4DCC .....	10
Q88GX4DMP .....	10
REST .....	62
RESTEP .....	62
REST-SR.....	62
RJL1967RCP .....	88
RR165 .....	104
SF4 .....	94
SH1 .....	94
SH200 .....	89
SH216 .....	89
SH230 .....	89
SL6650A .....	60
SLL SERIES .....	94
SLR SERIES .....	94
SLXL SERIES .....	94
SR2804 SERIES.....	64
SR700XPL .....	64
SRPACK-100AL .....	64
SS2 .....	94







BASHLIN INDUSTRIES INC. INNOVATION UP / DOWN / ALL-AROUND



**BASHLIN INDUSTRIES INC.**  
119 W. PINE STREET GROVE CITY, PA 16127  
724.458.8340 WWW.BASHLIN.COM